
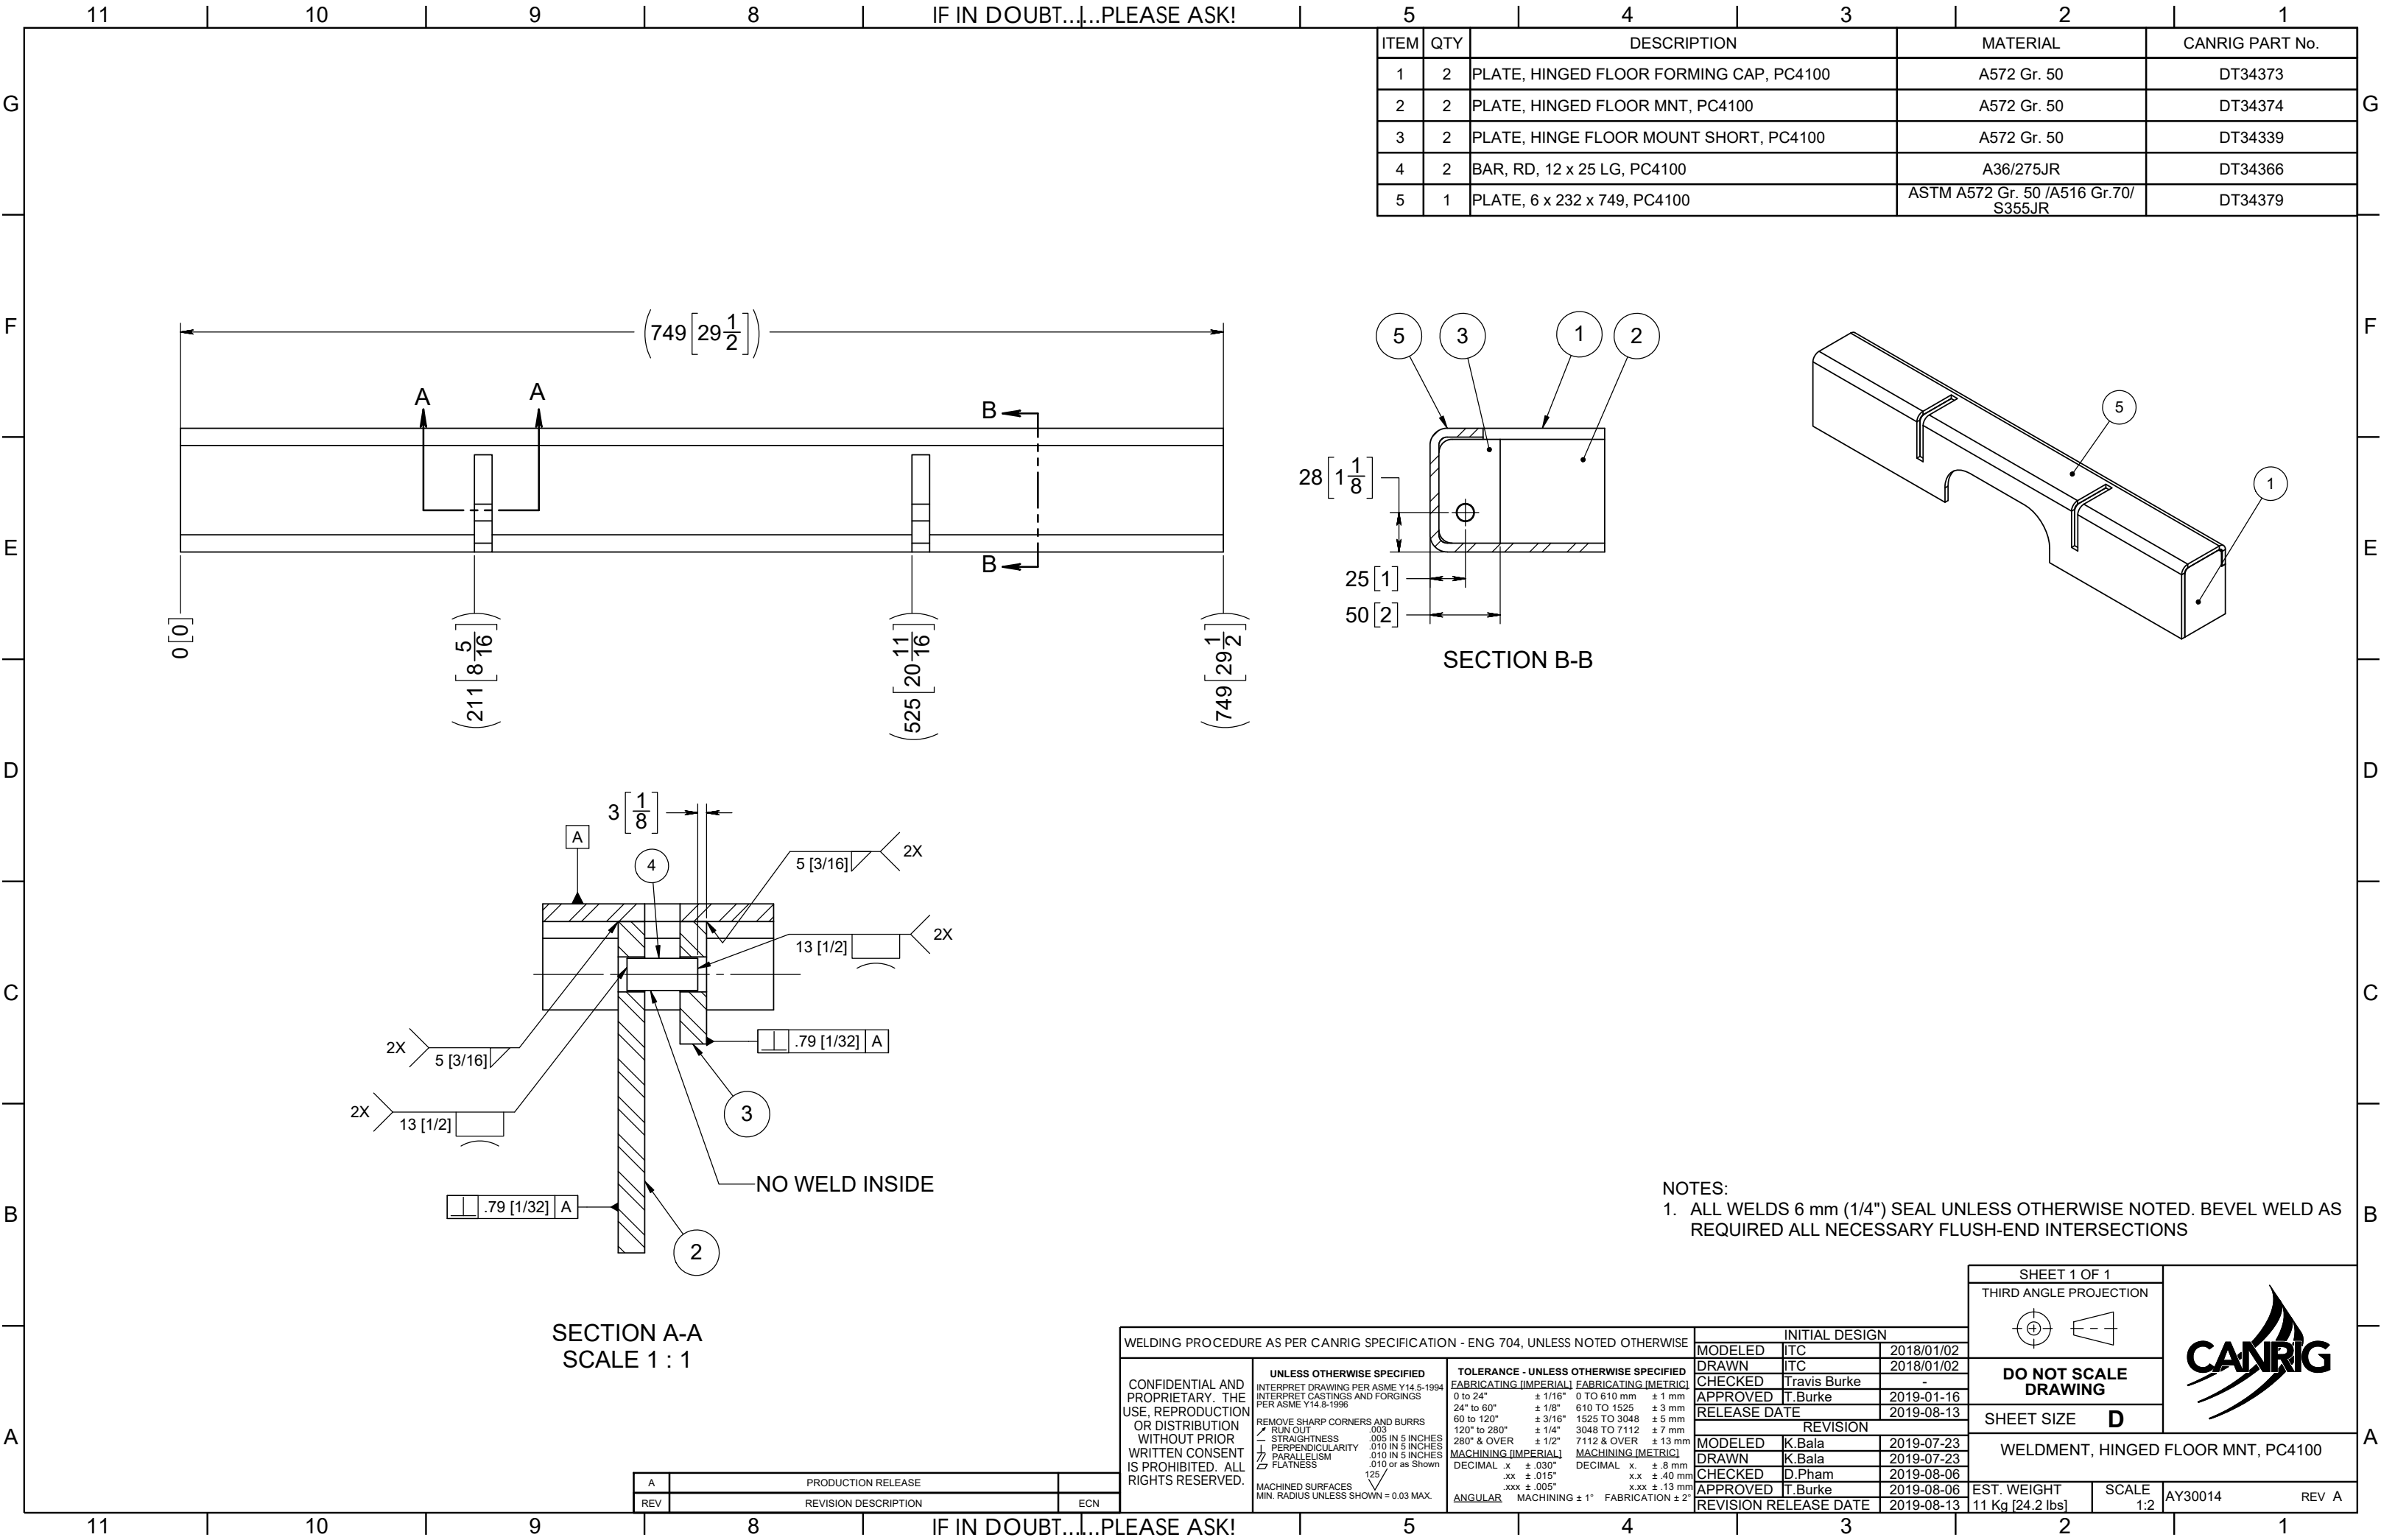




ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	2	PLATE, HINGED FLOOR FORMING CAP, PC4100	A572 Gr. 50	DT34373
2	2	PLATE, HINGED FLOOR MNT, PC4100	A572 Gr. 50	DT34374
3	2	PLATE, HINGE FLOOR MOUNT SHORT, PC4100	A572 Gr. 50	DT34339
4	2	BAR, RD, 12 x 25 LG, PC4100	A36/275JR	DT34366
5	1	PLATE, 6 x 232 x 749, PC4100	ASTM A572 Gr. 50 /A516 Gr.70/ S355JR	DT34379

NOTES:
1. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN							
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.				MODELED	ITC	2018/01/02	DO NOT SCALE DRAWING				
				DRAWN	ITC	2018/01/02					
				CHECKED	Travis Burke	-					
UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-1994 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996				APPROVED	T.Burke	2019-01-16	SHEET SIZE D				
				RELEASE DATE		2019-08-13					
				REMOVE SHARP CORNERS AND BURRS — RUN OUT .003 — STRAIGHTNESS .005 IN 5 INCHES — PERPENDICULARITY .010 IN 5 INCHES — PARALLELISM .010 IN 5 INCHES — FLATNESS .010 or as Shown 125/ MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.				REVISION			WELDMENT, HINGED FLOOR MNT, PC4100
MODELED	K.Bala	2019-07-23									
DRAWN	K.Bala	2019-07-23									
TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING [IMPERIAL] FABRICATING [METRIC] 0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL x ± .030" DECIMAL x ± .8 mm .xxx ± .015" x.xx ± .40 mm .xxx ± .005" x.xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°				CHECKED	D.Pham	2019-08-06	EST. WEIGHT 11 Kg [24.2 lbs]		SCALE 1:2	AY30014	REV A
				APPROVED	T.Burke	2019-08-06					
								REVISION	RELEASE DATE	2019-08-13	