


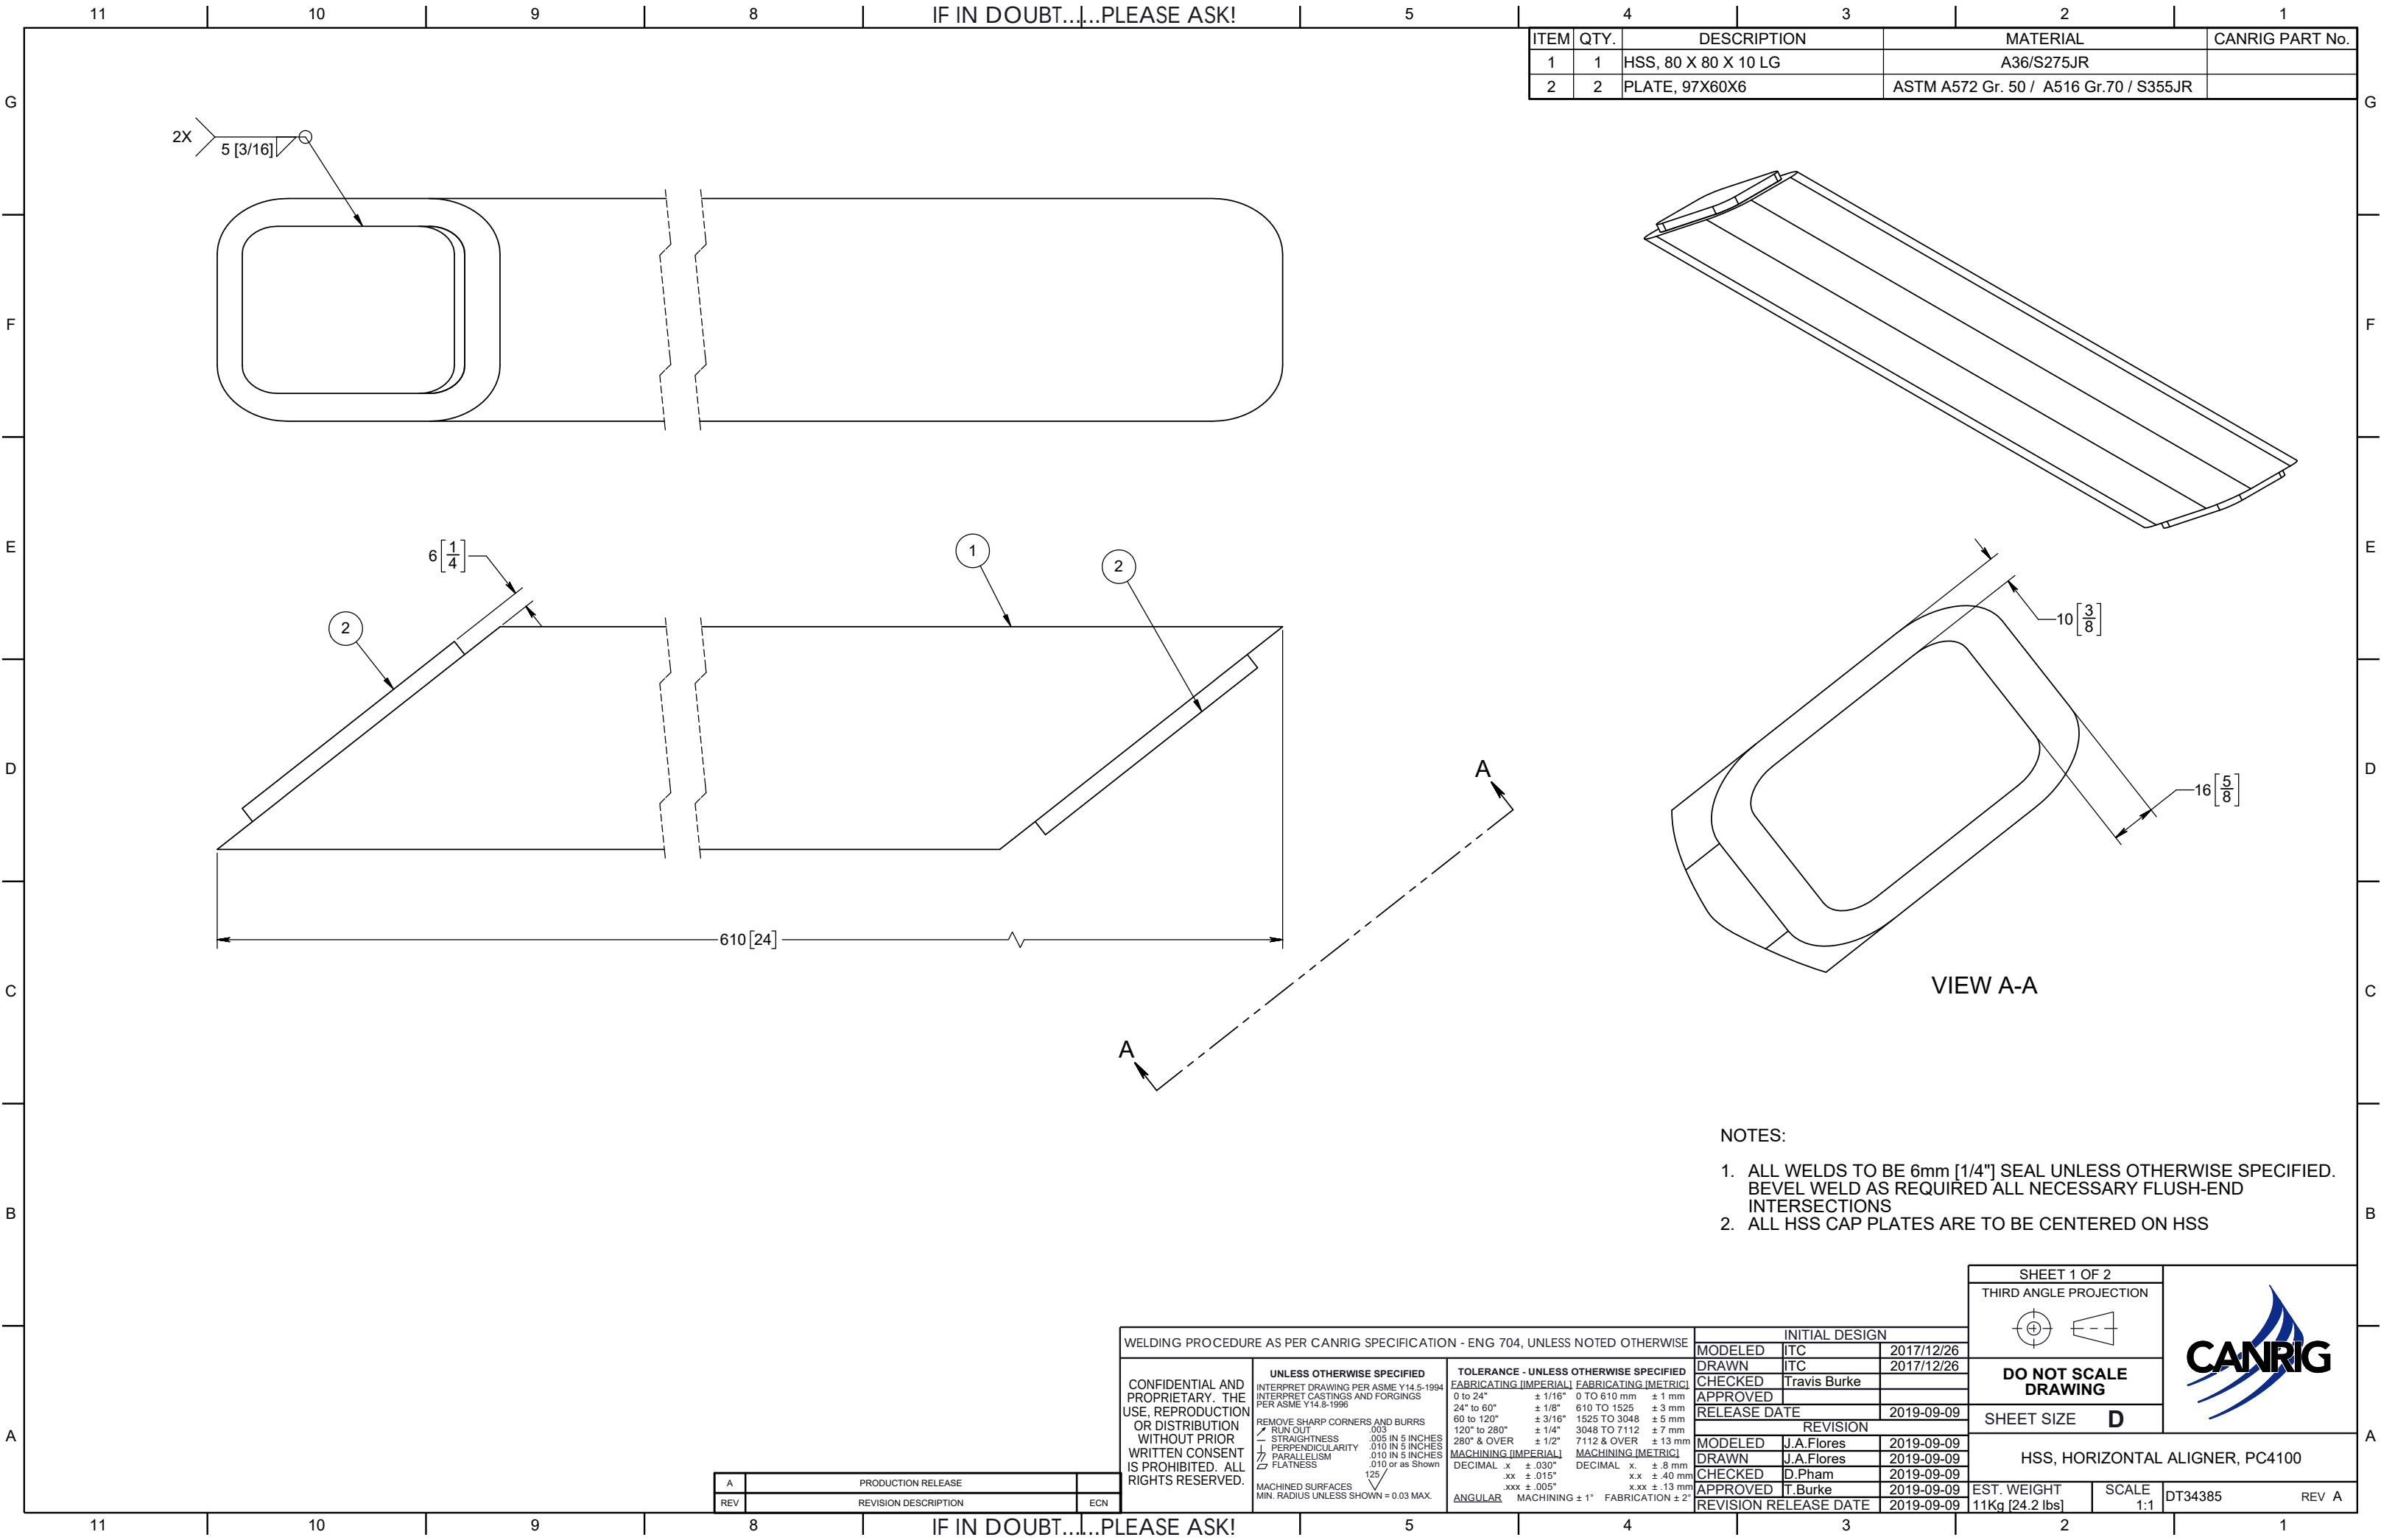

ITEM	QTY.	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	HSS, 80 X 80 X 10 LG	A36/S275JR	
2	2	PLATE, 97X60X6	ASTM A572 Gr. 50 / A516 Gr.70 / S355JR	

NOTES:

1. ALL WELDS TO BE 6mm [1/4"] SEAL UNLESS OTHERWISE SPECIFIED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS
2. ALL HSS CAP PLATES ARE TO BE CENTERED ON HSS

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN		 							
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.				MODELED ITC 2017/12/26									
				DRAWN ITC 2017/12/26									
				CHECKED Travis Burke									
UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-1994 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996				APPROVED		DO NOT SCALE DRAWING							
				RELEASE DATE 2019-09-09		SHEET SIZE D							
				REVISION		HSS, HORIZONTAL ALIGNER, PC4100							
REMOVE SHARP CORNERS AND BURRS — RUN OUT .003 — STRAIGHTNESS .005 IN 5 INCHES — PERPENDICULARITY .010 IN 5 INCHES — PARALLELISM .010 IN 5 INCHES — FLATNESS .010 or as Shown 125/ MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.				MODELED J.A.Flores 2019-09-09		EST. WEIGHT 11Kg [24.2 lbs]		SCALE 1:1		DT34385		REV A	
				DRAWN J.A.Flores 2019-09-09									
				CHECKED D.Pharm 2019-09-09									
				APPROVED T.Burke 2019-09-09									
				REVISION RELEASE DATE 2019-09-09									
TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING [IMPERIAL] FABRICATING [METRIC] 0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL .x ± .030" DECIMAL .x ± .8 mm .xxx ± .015" .xx ± .40 mm .xxx ± .005" .xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°													