


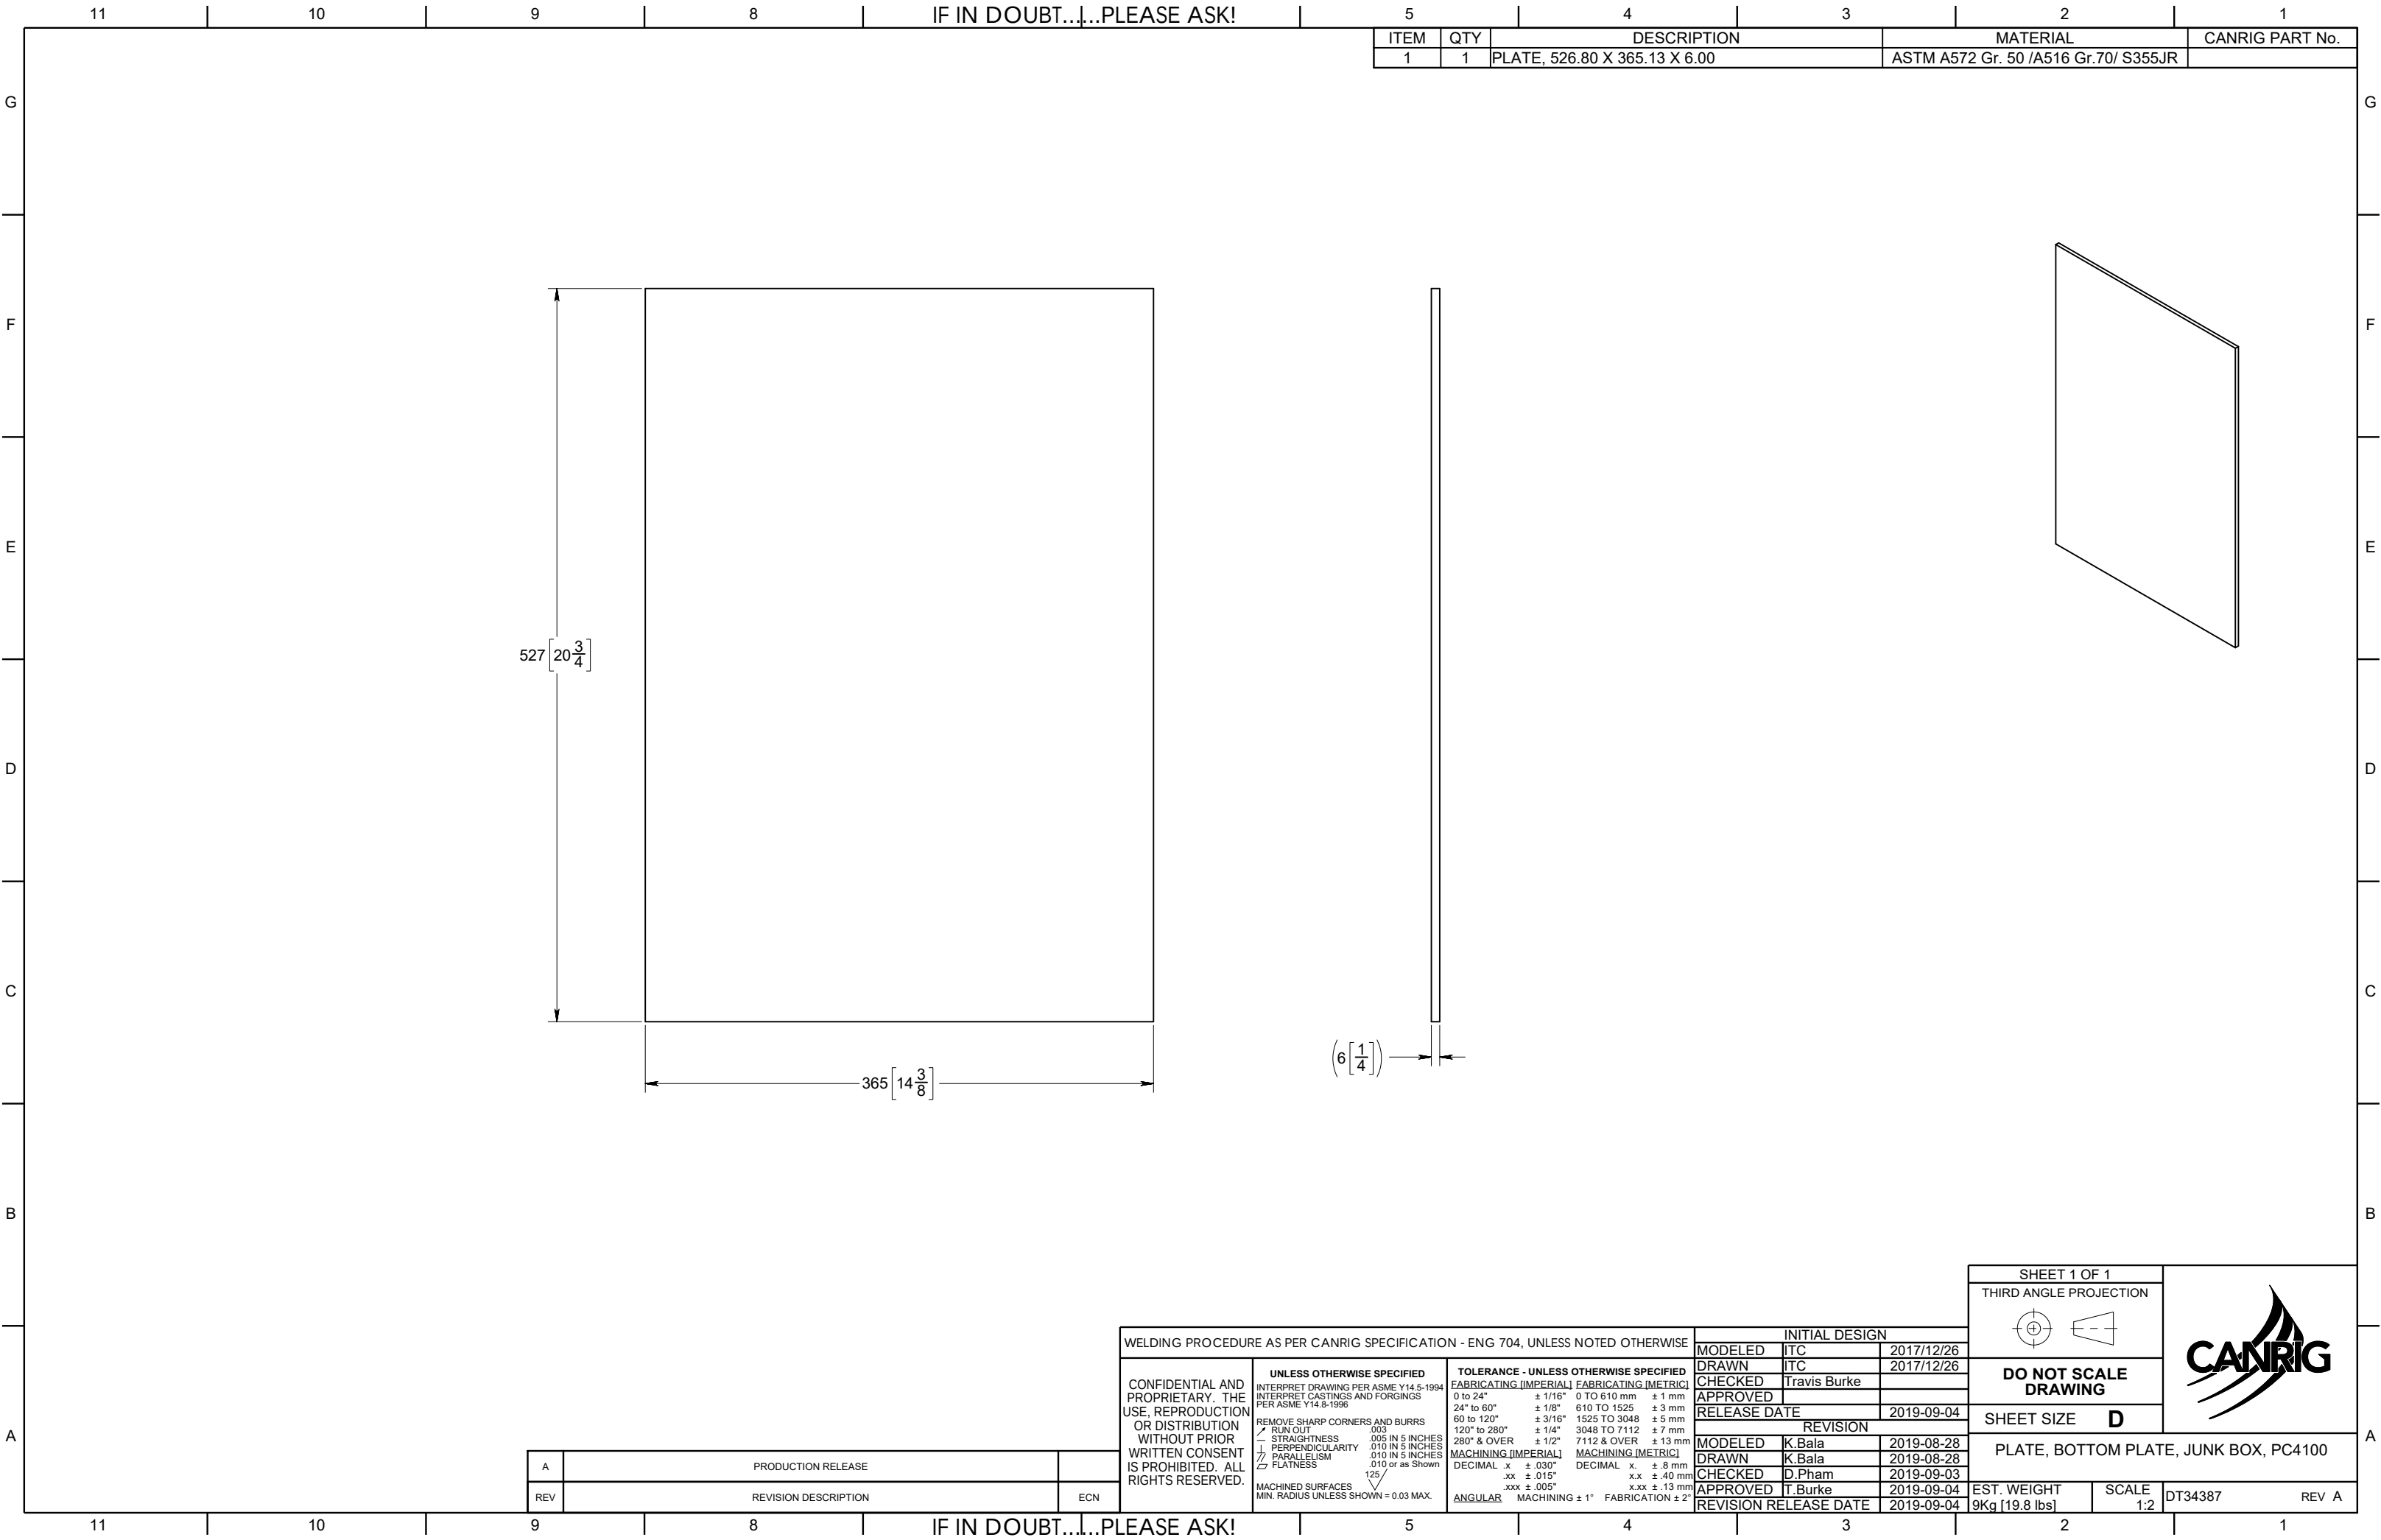


ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	PLATE, 526.80 X 365.13 X 6.00	ASTM A572 Gr. 50 / A516 Gr.70/ S355JR	

527 $\left[20\frac{3}{4}\right]$

365 $\left[14\frac{3}{8}\right]$

$\left(6\left[\frac{1}{4}\right]\right)$

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN		 		
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	UNLESS OTHERWISE SPECIFIED		TOLERANCE - UNLESS OTHERWISE SPECIFIED		MODELED ITC 2017/12/26			
	INTERPRET DRAWING PER ASME Y14.5-1994		FABRICATING [IMPERIAL] FABRICATING [METRIC]		DRAWN ITC 2017/12/26			
	INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1995				CHECKED Travis Burke			
	REMOVE SHARP CORNERS AND BURRS				APPROVED			
	RUN OUT				RELEASE DATE 2019-09-04			
	STRAIGHTNESS .005 IN 5 INCHES				REVISION			
	PERPENDICULARITY .010 IN 5 INCHES				MODELED K.Bala 2019-08-28			
	PARALLELISM .010 IN 5 INCHES				DRAWN K.Bala 2019-08-28			
	FLATNESS .012 or as Shown				CHECKED D.Pham 2019-09-03			
	MACHINED SURFACES				APPROVED T.Burke 2019-09-04			
	MIN. RADIUS UNLESS SHOWN = 0.03 MAX.				REVISION RELEASE DATE 2019-09-04			
					EST. WEIGHT 9Kg [19.8 lbs]			
					SCALE 1:2			
					DT34387 REV A			

A	PRODUCTION RELEASE	
REV	REVISION DESCRIPTION	ECN

UNLESS OTHERWISE SPECIFIED		
INTERPRET DRAWING PER ASME Y14.5-1994 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996		
REMOVE SHARP CORNERS AND BURRS		
∠ RUN OUT	.003	
— STRAIGHTNESS	.005 IN 5 INCHES	
⊥ PERPENDICULARITY	.010 IN 5 INCHES	
∥ PARALLELISM	.010 IN 5 INCHES	
△ FLATNESS	.010 or as Shown	
MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.		
125/		

TOLERANCE - UNLESS OTHERWISE SPECIFIED		
FABRICATING [IMPERIAL]	FABRICATING [METRIC]	
0 to 24"	± 1/16"	0 TO 610 mm ± 1 mm
24" to 60"	± 1/8"	610 TO 1525 ± 3 mm
60 to 120"	± 3/16"	1525 TO 3048 ± 5 mm
120" to 280"	± 1/4"	3048 TO 7112 ± 7 mm
280" & OVER	± 1/2"	7112 & OVER ± 13 mm
MACHINING [IMPERIAL]		
DECIMAL	x	± .030"
.xx	± .015"	x.xx ± .40 mm
.xxx	± .005"	x.xx ± .13 mm
ANGULAR		
MACHINING ± 1° FABRICATION ± 2°		