


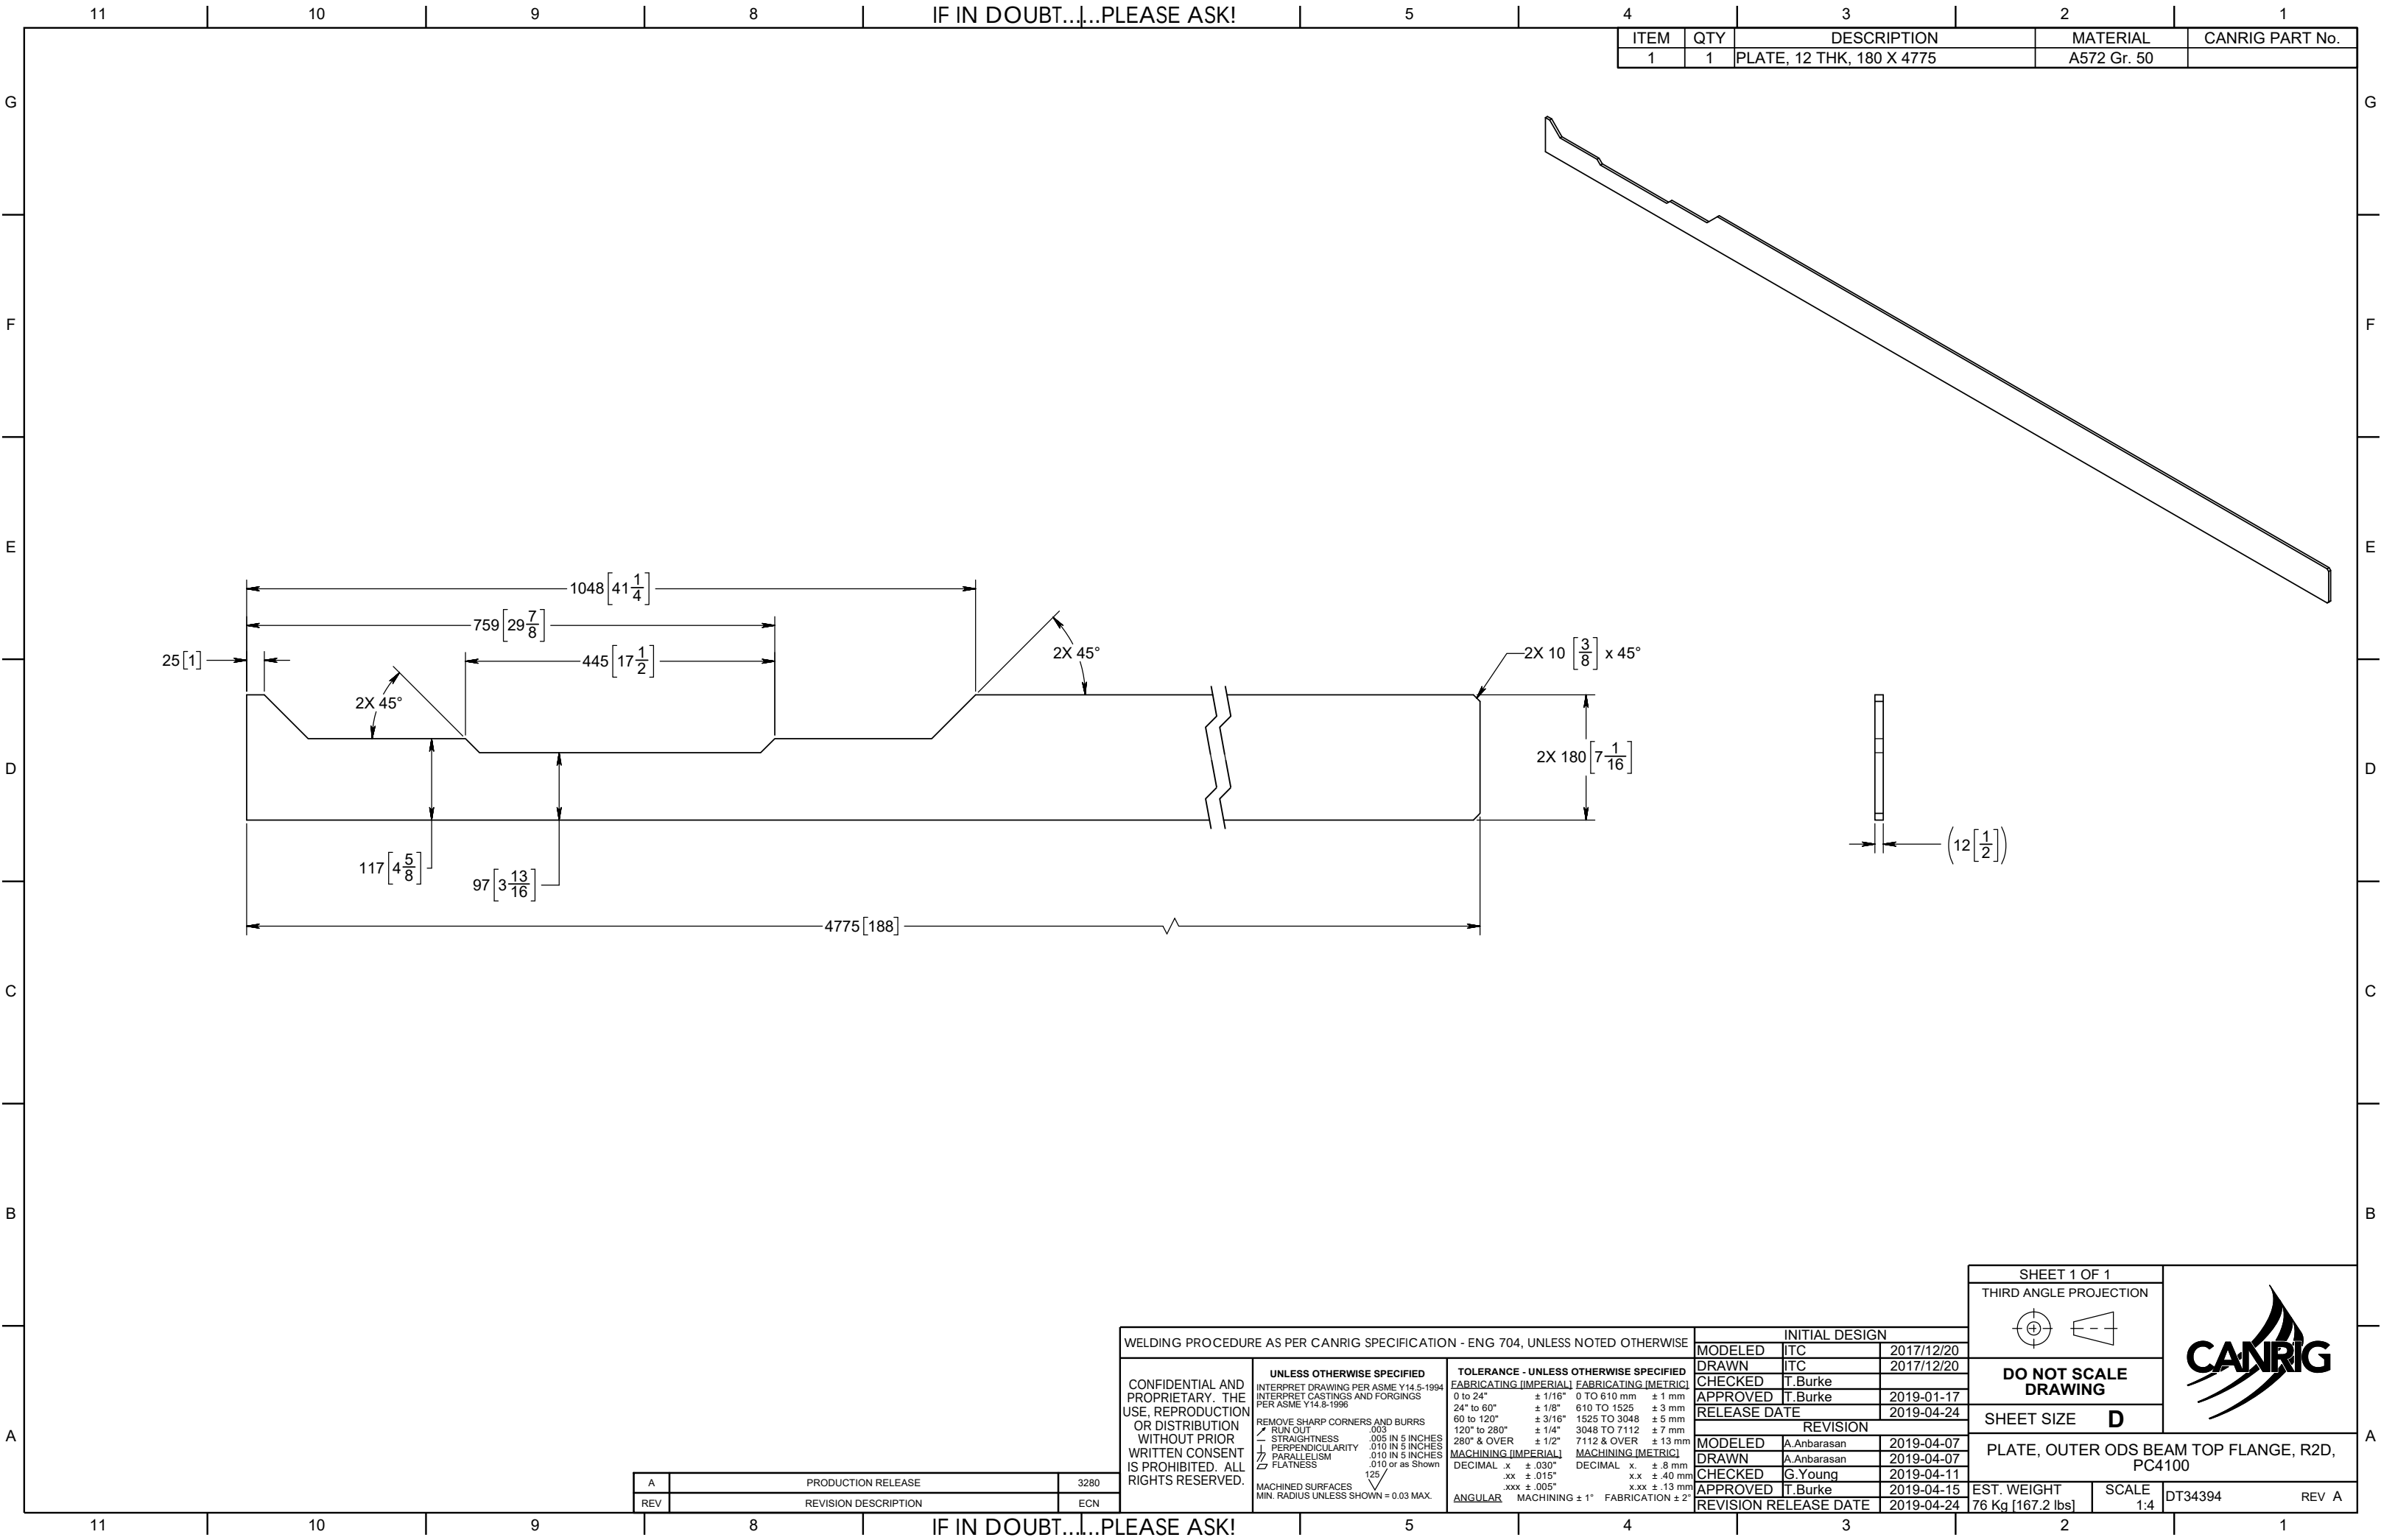

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	PLATE, 12 THK, 180 X 4775	A572 Gr. 50	

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN							
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-1994 FITTED CASTINGS AND FORGINGS PER ASME Y14.8-1996		TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING (IMPERIAL) FABRICATING (METRIC)		MODELED	ITC	2017/12/20	DO NOT SCALE DRAWING			
					DRAWN	ITC	2017/12/20				
					CHECKED	T.Burke		SHEET SIZE D			
					APPROVED	T.Burke	2019-01-17				
					RELEASE DATE		2019-04-24				
					REVISION			PLATE, OUTER ODS BEAM TOP FLANGE, R2D, PC4100			
					MODELED	A.Anbarasan	2019-04-07				
					DRAWN	A.Anbarasan	2019-04-07				
					CHECKED	G.Young	2019-04-11				
					APPROVED	T.Burke	2019-04-15				
				REVISION RELEASE DATE		2019-04-24	EST. WEIGHT 76 Kg [167.2 lbs]		SCALE 1:4	DT34394	REV A

A	PRODUCTION RELEASE	3280
REV	REVISION DESCRIPTION	ECN

UNLESS OTHERWISE SPECIFIED		
INTERPRET DRAWING PER ASME Y14.5-1994		
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996		
REMOVE SHARP CORNERS AND BURRS		
— RUN OUT .003		
— STRAIGHTNESS .005 IN 5 INCHES		
— PERPENDICULARITY .010 IN 5 INCHES		
— PARALLELISM .010 IN 5 INCHES		
— FLATNESS .010 or as Shown		
MACHINED SURFACES		
MIN. RADIUS UNLESS SHOWN = 0.03 MAX.		
TOLERANCE - UNLESS OTHERWISE SPECIFIED		
FABRICATING [IMPERIAL] FABRICATING [METRIC]		
0 to 24"	± 1/16"	0 TO 610 mm ± 1 mm
24" to 60"	± 1/8"	610 TO 1525 ± 3 mm
60 to 120"	± 3/16"	1525 TO 3048 ± 5 mm
120" to 280"	± 1/4"	3048 TO 7112 ± 7 mm
280" & OVER	± 1/2"	7112 & OVER ± 13 mm
MACHINING [IMPERIAL] MACHINING [METRIC]		
DECIMAL .x ± .030"	DECIMAL .x ± .8 mm	
.xx ± .015"	x.xx ± .40 mm	
.xxx ± .005"	x.xx ± .13 mm	
ANGULAR	MACHINING ± 1°	FABRICATION ± 2°