



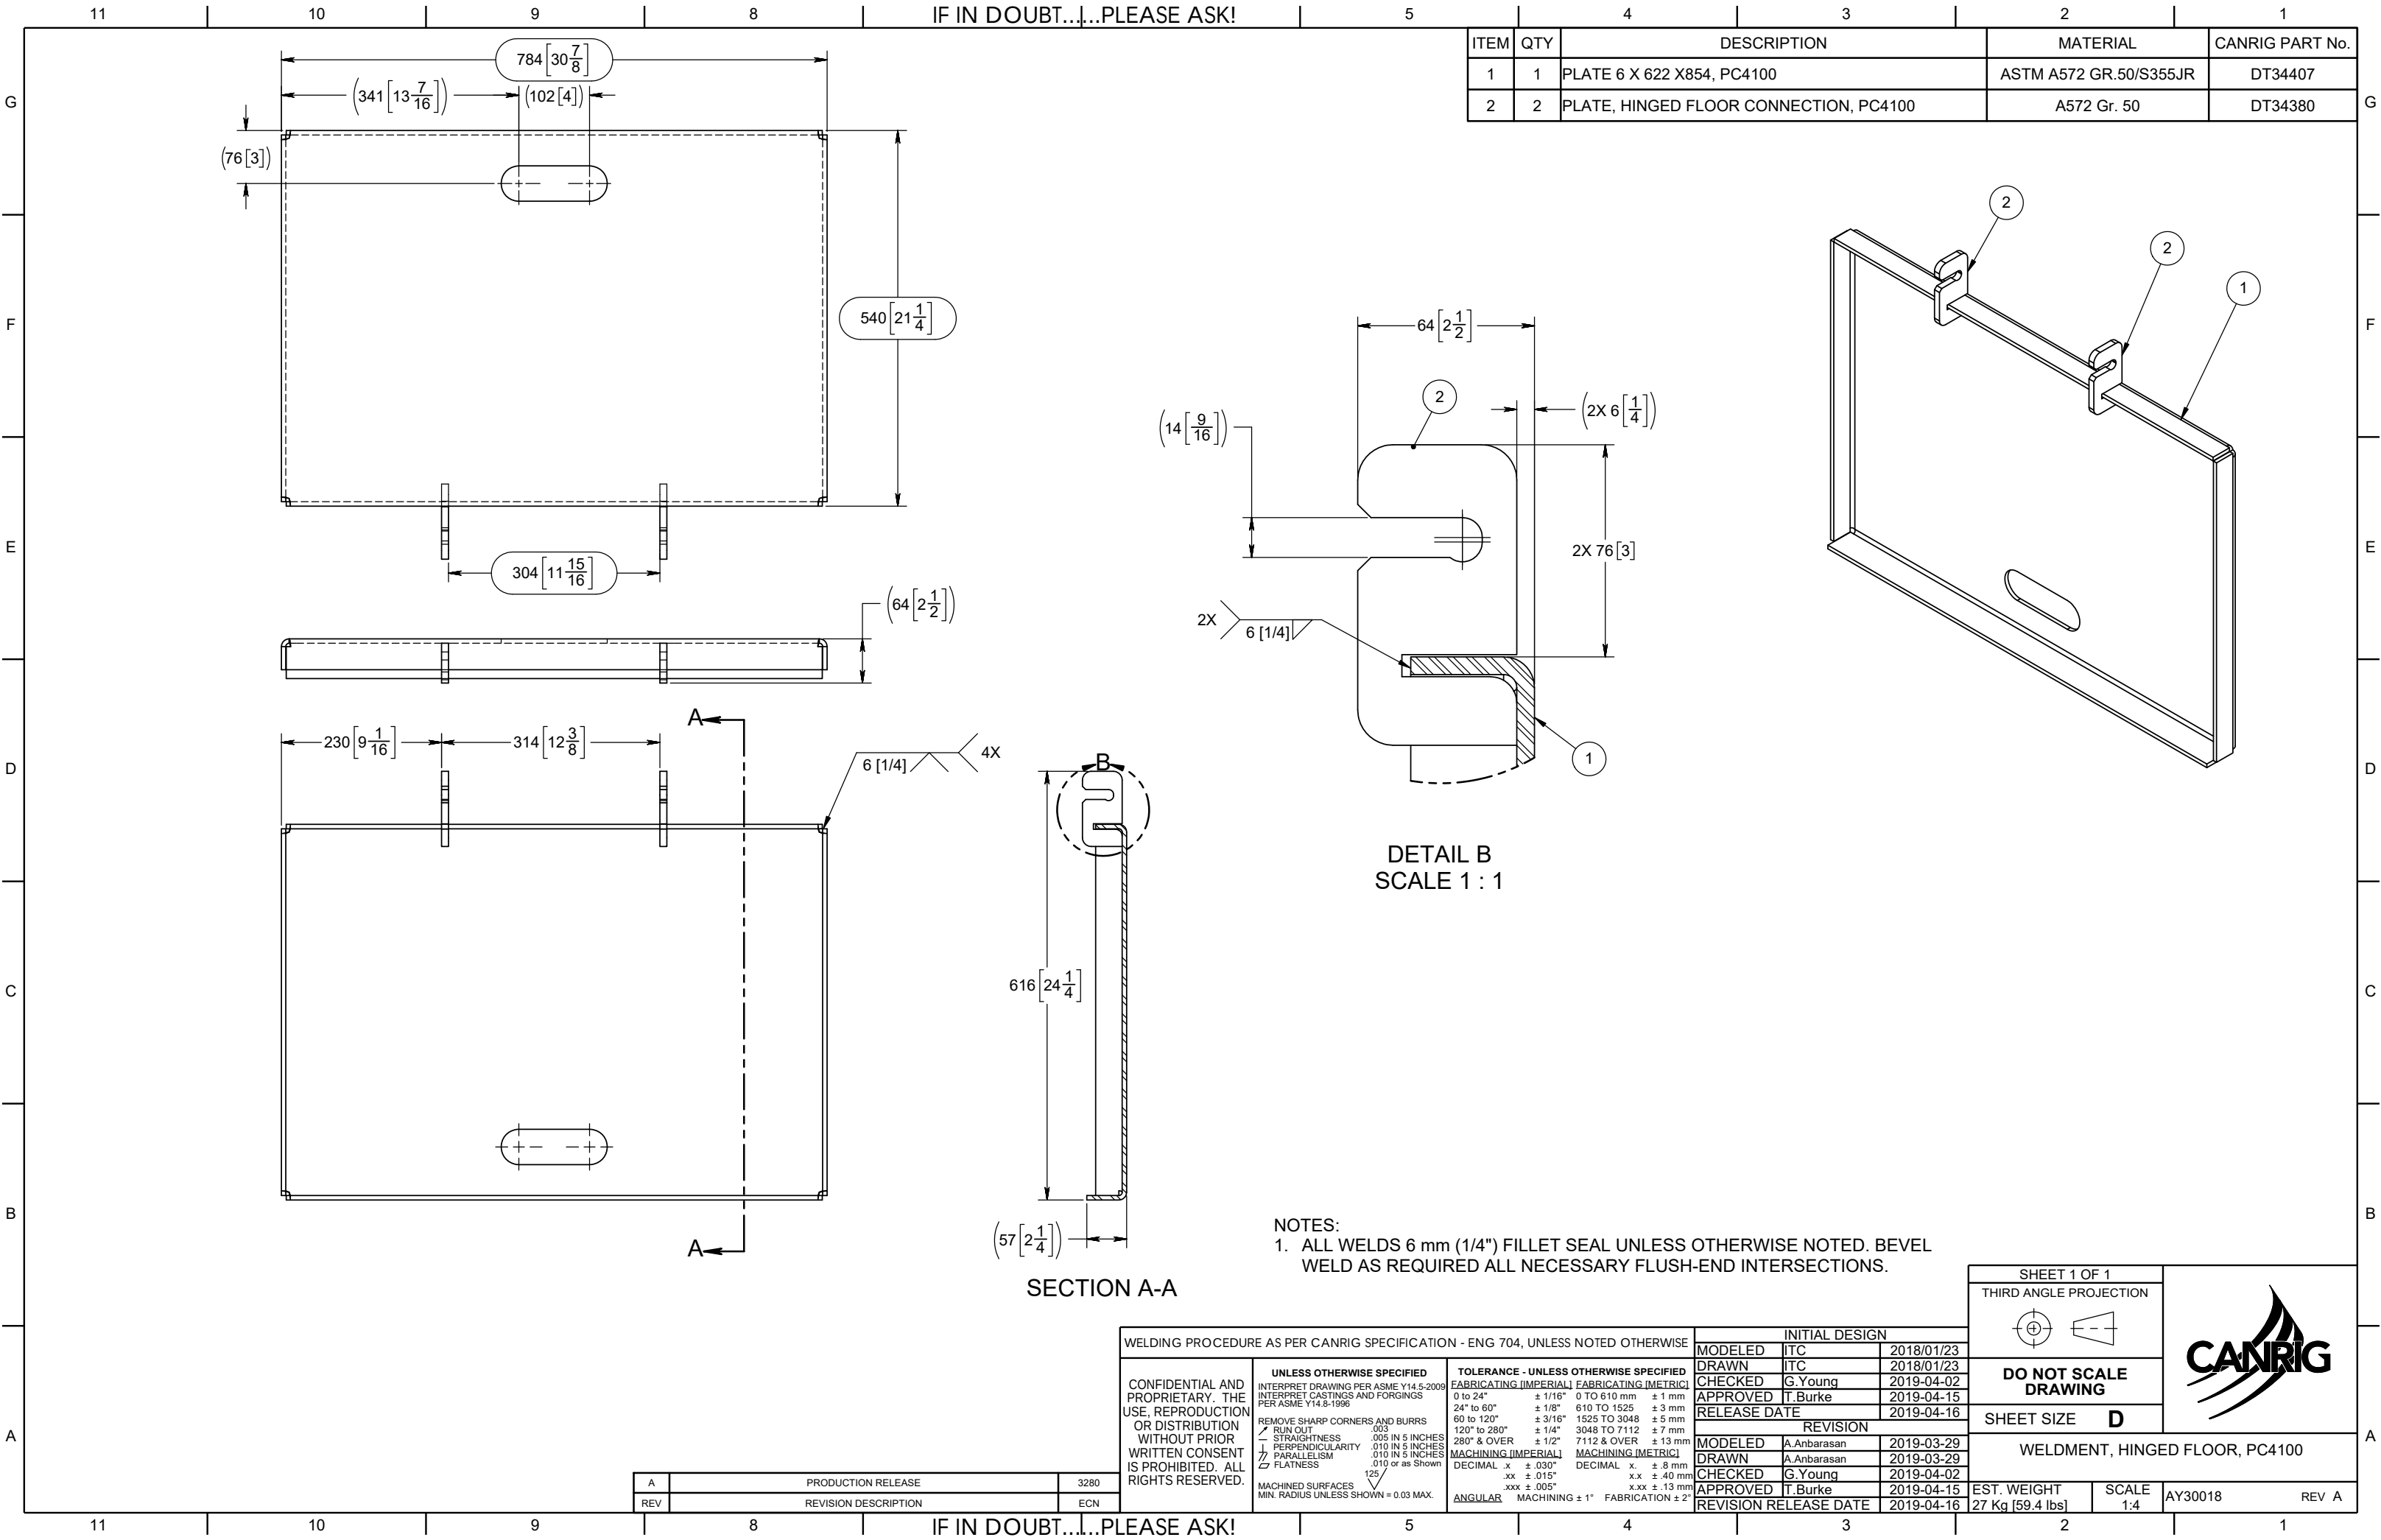

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	PLATE 6 X 622 X854, PC4100	ASTM A572 GR.50/S355JR	DT34407
2	2	PLATE, HINGED FLOOR CONNECTION, PC4100	A572 Gr. 50	DT34380

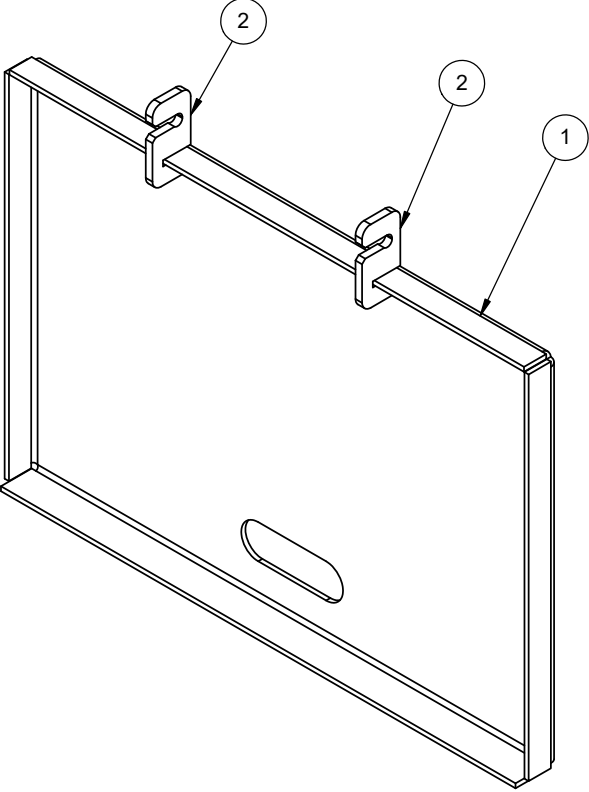

DETAIL B
SCALE 1 : 1

NOTES:
1. ALL WELDS 6 mm (1/4") FILLET SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.

SECTION A-A

A	PRODUCTION RELEASE	3280
REV	REVISION DESCRIPTION	ECN

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN					
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.		UNLESS OTHERWISE SPECIFIED		TOLERANCE - UNLESS OTHERWISE SPECIFIED		DO NOT SCALE DRAWING			
		INTERPRET DRAWING PER ASME Y14.5-2009 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996		FABRICATING [IMPERIAL] FABRICATING [METRIC]		SHEET SIZE D			
		REMOVE SHARP CORNERS AND BURRS / RUN OUT .003 - STRAIGHTNESS .005 IN 5 INCHES ⊥ PERPENDICULARITY .010 IN 5 INCHES // PARALLELISM .010 IN 5 INCHES ≡ FLATNESS .010 or as Shown 125/ MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.		0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL .x ± .030" DECIMAL .x ± .8 mm .xx ± .015" .xx ± .40 mm .xxx ± .005" .xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°		WELDMENT, HINGED FLOOR, PC4100			
		MODELED A.Anbarasan 2019-03-29 DRAWN A.Anbarasan 2019-03-29 CHECKED G.Young 2019-04-02 APPROVED T.Burke 2019-04-15 REVISION RELEASE DATE 2019-04-16		EST. WEIGHT 27 Kg [59.4 lbs] SCALE 1:4 AY30018 REV A					