
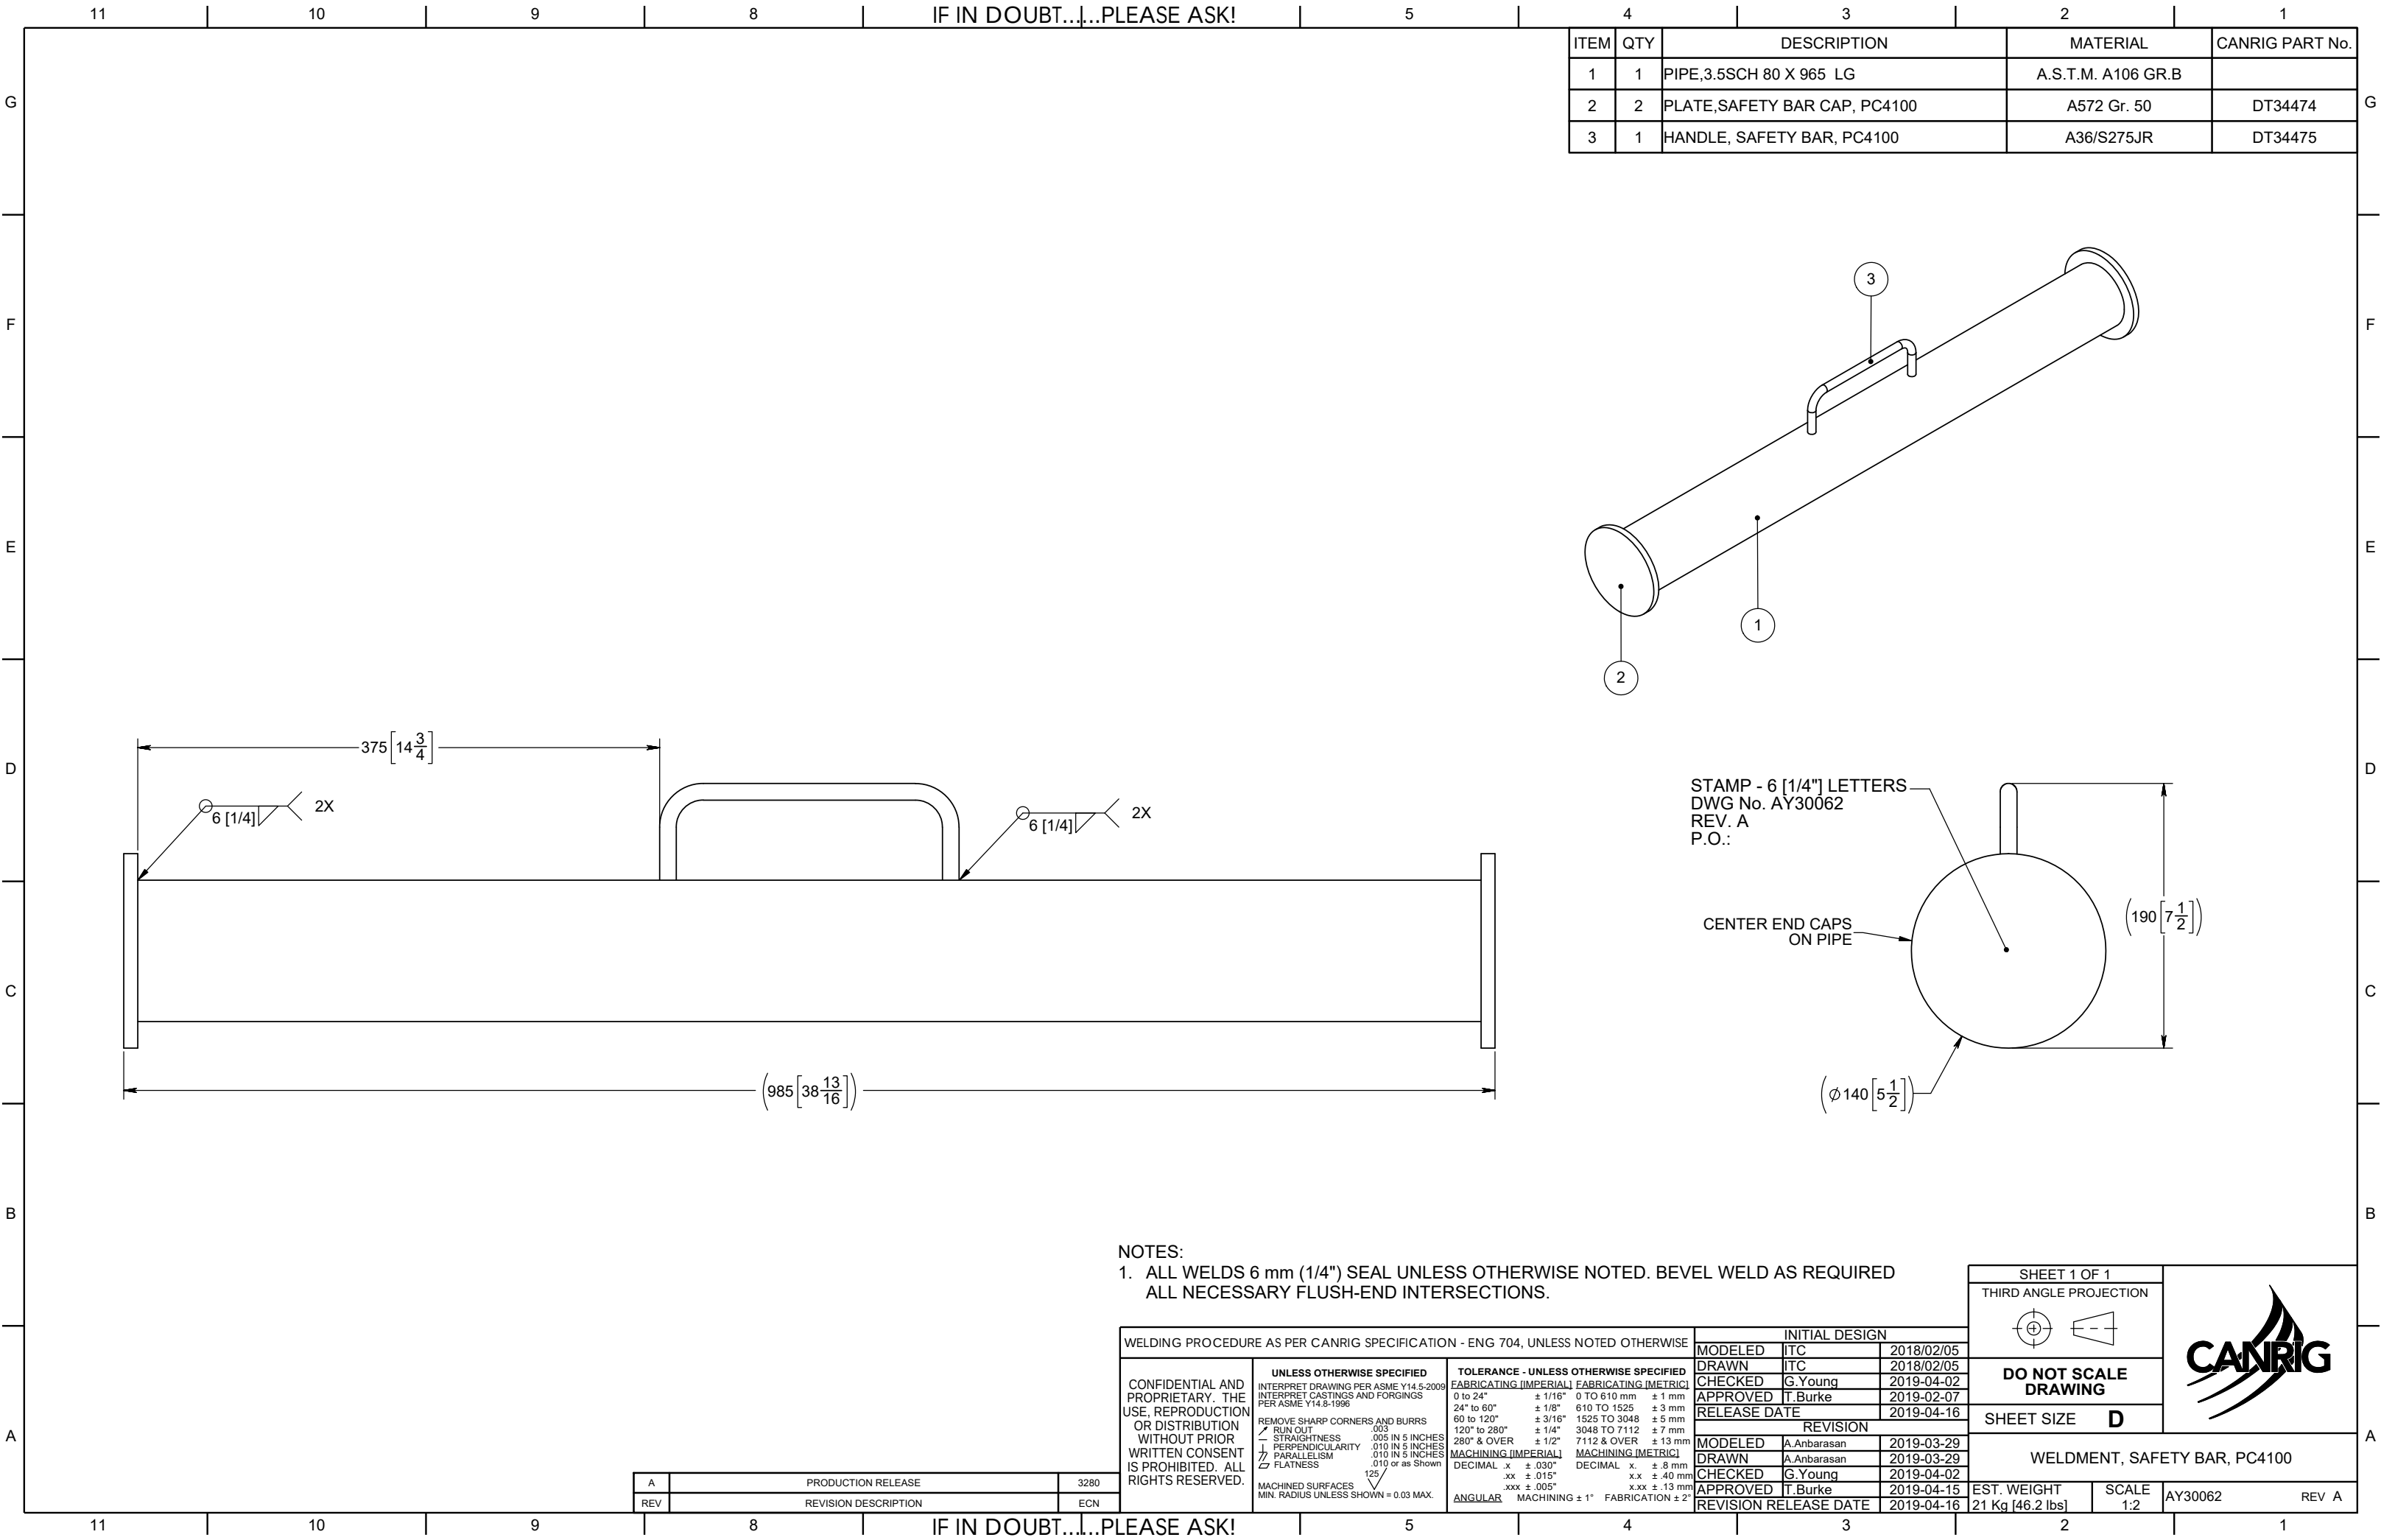




ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	PIPE,3.5SCH 80 X 965 LG	A.S.T.M. A106 GR.B	
2	2	PLATE,SAFETY BAR CAP, PC4100	A572 Gr. 50	DT34474
3	1	HANDLE, SAFETY BAR, PC4100	A36/S275JR	DT34475

NOTES:
1. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED
ALL NECESSARY FLUSH-END INTERSECTIONS.

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN								
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	UNLESS OTHERWISE SPECIFIED		TOLERANCE - UNLESS OTHERWISE SPECIFIED			MODELED	ITC	2018/02/05	DO NOT SCALE DRAWING			
	INTERPRET DRAWING PER ASME Y14.5-2009 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996		FABRICATING [IMPERIAL] FABRICATING [METRIC]			DRAWN	ITC	2018/02/05				
	REMOVE SHARP CORNERS AND BURRS		0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm			CHECKED	G.Young	2019-04-02	SHEET SIZE D			
	RUN OUT .003		24" to 60" ± 1/8" 610 TO 1525 ± 3 mm			APPROVED	T.Burke	2019-02-07				
	STRAIGHTNESS .005 IN 5 INCHES		60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm			RELEASE DATE	2019-04-16					
	PERPENDICULARITY .010 IN 5 INCHES		120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm			REVISION			WELDMENT, SAFETY BAR, PC4100			
	PARALLELISM .010 IN 5 INCHES		280" & OVER ± 1/2" 7112 & OVER ± 13 mm			MODELED	A.Anbarasan	2019-03-29				
	FLATNESS .010 or as Shown		MACHINING [IMPERIAL] MACHINING [METRIC]			DRAWN	A.Anbarasan	2019-03-29				
	125/ MACHINED SURFACES		DECIMAL .x ± .030" DECIMAL .x ± .8 mm			CHECKED	G.Young	2019-04-02				
	MIN. RADIUS UNLESS SHOWN = 0.03 MAX.		.xx ± .015" .xx ± .40 mm			APPROVED	T.Burke	2019-04-15				
			.xxx ± .005" .xxx ± .13 mm			REVISION RELEASE DATE	2019-04-16				EST. WEIGHT	SCALE
			ANGULAR MACHINING ± 1° FABRICATION ± 2°			21 Kg [46.2 lbs]		1:2				

A	PRODUCTION RELEASE	3280
REV	REVISION DESCRIPTION	ECN