


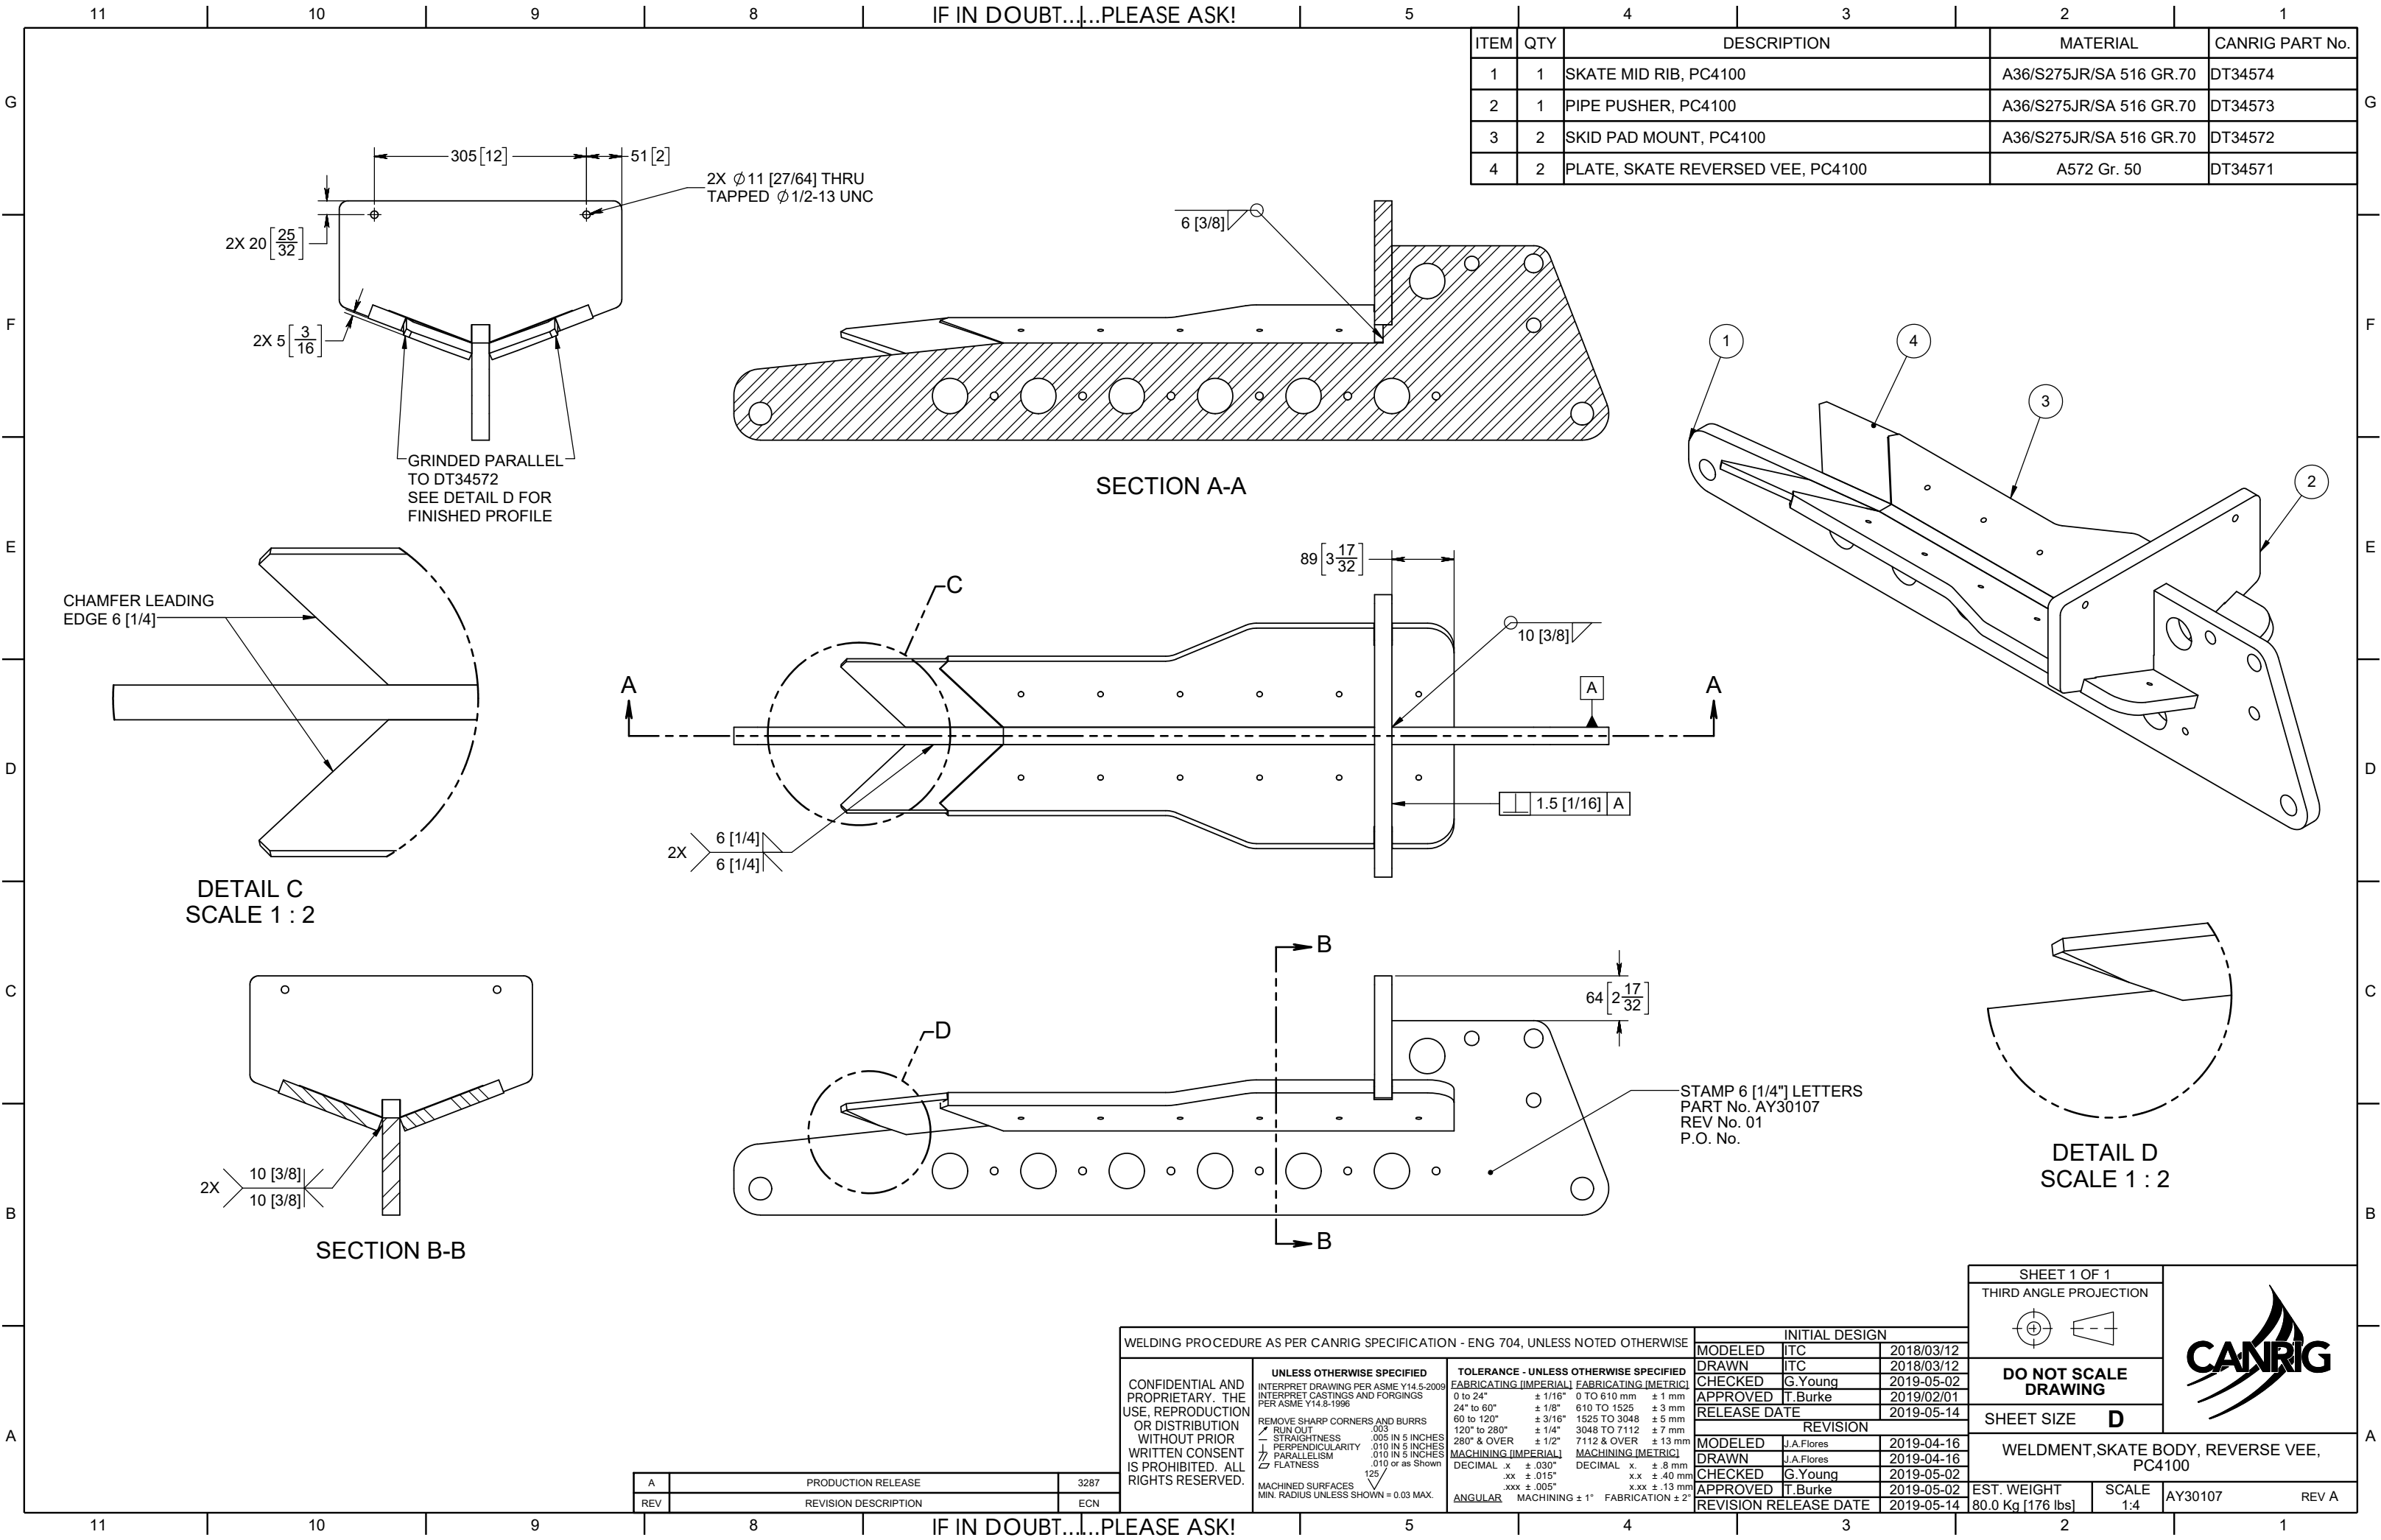


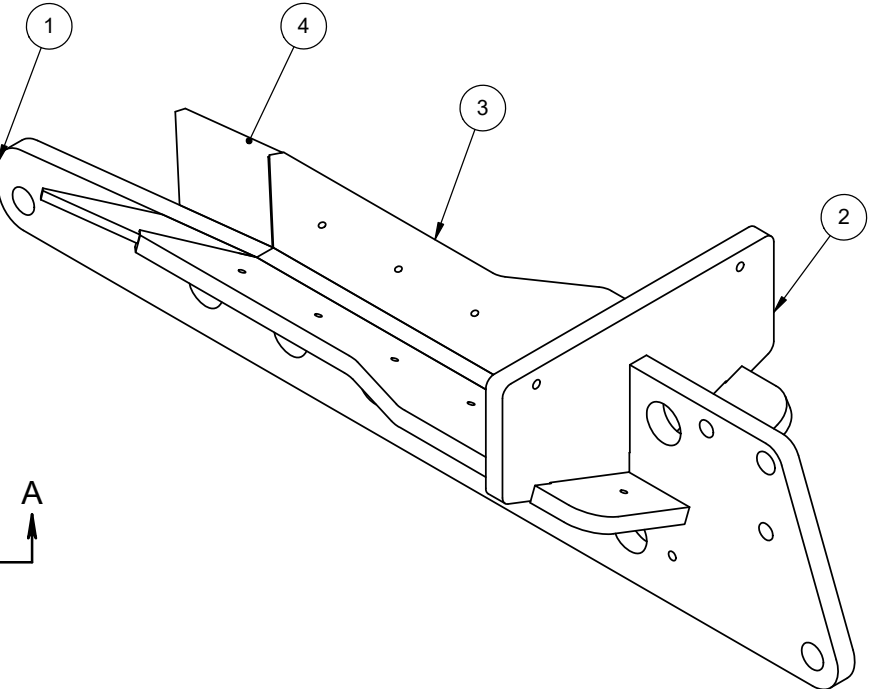


ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	SKATE MID RIB, PC4100	A36/S275JR/SA 516 GR.70	DT34574
2	1	PIPE PUSHER, PC4100	A36/S275JR/SA 516 GR.70	DT34573
3	2	SKID PAD MOUNT, PC4100	A36/S275JR/SA 516 GR.70	DT34572
4	2	PLATE, SKATE REVERSED VEE, PC4100	A572 Gr. 50	DT34571

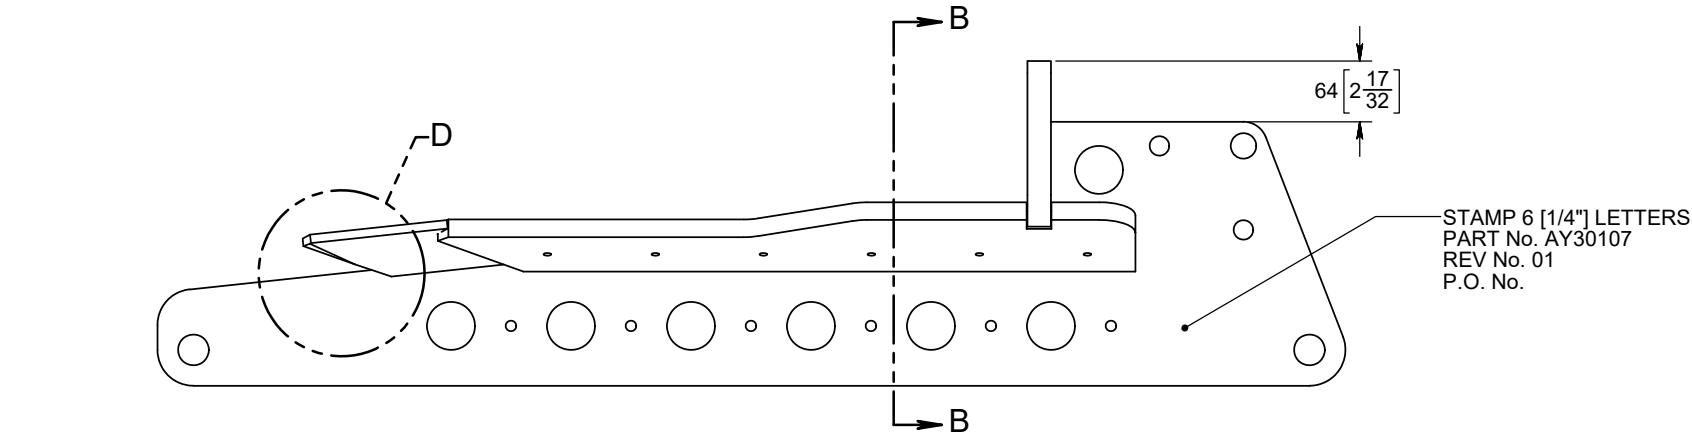

SECTION A-A

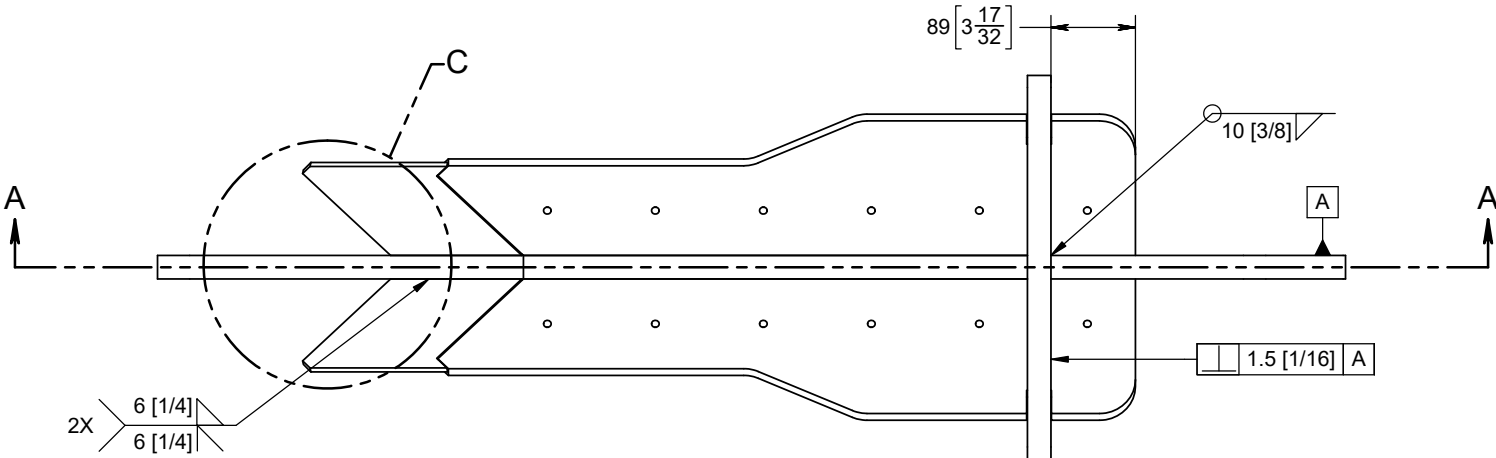

DETAIL D
SCALE 1 : 2

SHEET 1 OF 1		
THIRD ANGLE PROJECTION		
		
DO NOT SCALE DRAWING		
SHEET SIZE D		
WELDMENT, SKATE BODY, REVERSE VEE, PC4100		
EST. WEIGHT 80.0 Kg [176 lbs]	SCALE 1:4	AY30107
		REV A

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE			
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	UNLESS OTHERWISE SPECIFIED		TOLERANCE - UNLESS OTHERWISE SPECIFIED
	INTERPRET DRAWING PER ASME Y14.5-2009		FABRICATING [IMPERIAL]
	INTERPRET CASTINGS AND FORGINGS		FABRICATING [METRIC]
	PER ASME Y14.8-1996		0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm
	REMOVE SHARP CORNERS AND BURRS		24" to 60" ± 1/8" 610 TO 1525 ± 3 mm
	RUN OUT .003		60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm
MACHINED SURFACES, MIN. RADIUS UNLESS SHOWN = 0.03 MAX.	STRAIGHTNESS .005 IN 5 INCHES		120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm
	PERPENDICULARITY .010 IN 5 INCHES		280" & OVER ± 1/2" 7112 & OVER ± 13 mm
	PARALLELISM .010 IN 5 INCHES		MACHINING [IMPERIAL]
	FLATNESS .010 or as Shown		MACHINING [METRIC]
	125		DECIMAL .x ± .030" DECIMAL .x ± .8 mm
			.xx ± .015" .xx ± .40 mm
		ANGULAR	.xxx ± .005" .xxx ± .13 mm
		MACHINING ± 1°	FABRICATION ± 2°

A	PRODUCTION RELEASE	3287
REV	REVISION DESCRIPTION	ECN