


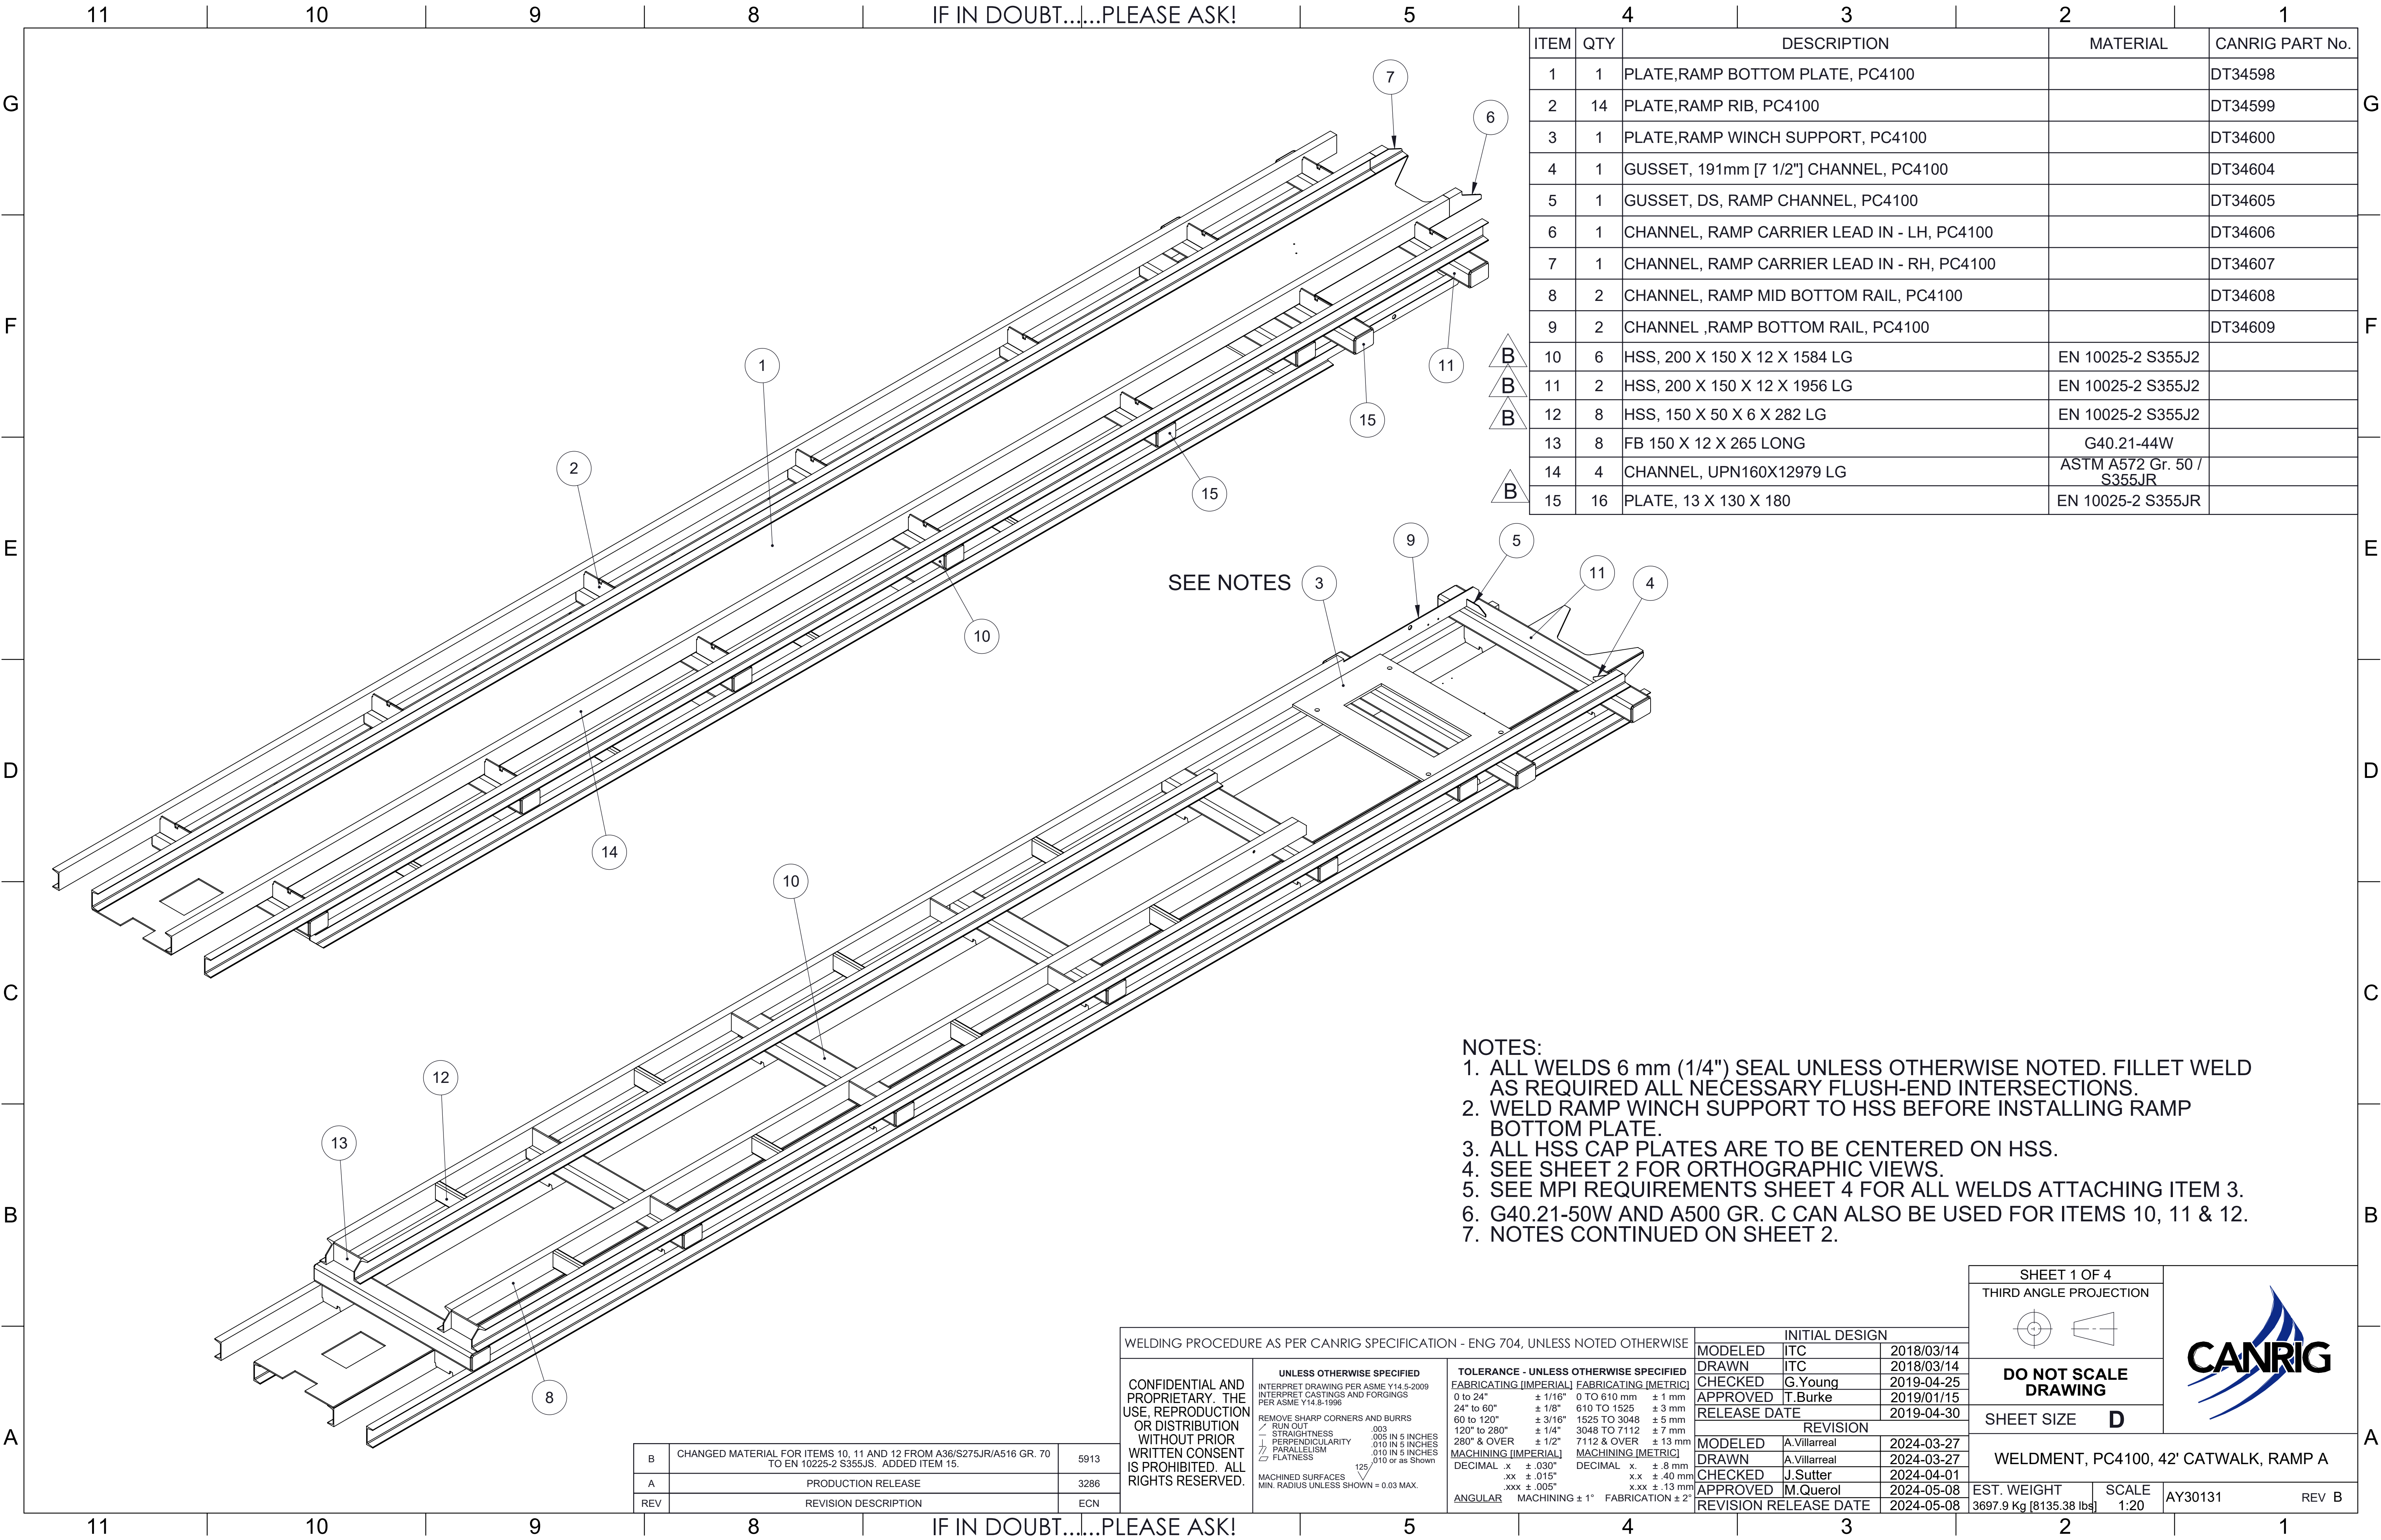

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	PLATE,RAMP BOTTOM PLATE, PC4100		DT34598
2	14	PLATE,RAMP RIB, PC4100		DT34599
3	1	PLATE,RAMP WINCH SUPPORT, PC4100		DT34600
4	1	GUSSET, 191mm [7 1/2"] CHANNEL, PC4100		DT34604
5	1	GUSSET, DS, RAMP CHANNEL, PC4100		DT34605
6	1	CHANNEL, RAMP CARRIER LEAD IN - LH, PC4100		DT34606
7	1	CHANNEL, RAMP CARRIER LEAD IN - RH, PC4100		DT34607
8	2	CHANNEL, RAMP MID BOTTOM RAIL, PC4100		DT34608
9	2	CHANNEL ,RAMP BOTTOM RAIL, PC4100		DT34609
10	6	HSS, 200 X 150 X 12 X 1584 LG	EN 10025-2 S355J2	
11	2	HSS, 200 X 150 X 12 X 1956 LG	EN 10025-2 S355J2	
12	8	HSS, 150 X 50 X 6 X 282 LG	EN 10025-2 S355J2	
13	8	FB 150 X 12 X 265 LONG	G40.21-44W	
14	4	CHANNEL, UPN160X12979 LG	ASTM A572 Gr. 50 / S355JR	
15	16	PLATE, 13 X 130 X 180	EN 10025-2 S355JR	

- B
- B
- B
- B

SEE NOTES

- NOTES:
1. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. FILLET WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.
 2. WELD RAMP WINCH SUPPORT TO HSS BEFORE INSTALLING RAMP BOTTOM PLATE.
 3. ALL HSS CAP PLATES ARE TO BE CENTERED ON HSS.
 4. SEE SHEET 2 FOR ORTHOGRAPHIC VIEWS.
 5. SEE MPI REQUIREMENTS SHEET 4 FOR ALL WELDS ATTACHING ITEM 3.
 6. G40.21-50W AND A500 GR. C CAN ALSO BE USED FOR ITEMS 10, 11 & 12.
 7. NOTES CONTINUED ON SHEET 2.

B	CHANGED MATERIAL FOR ITEMS 10, 11 AND 12 FROM A36/S275JR/A516 GR. 70 TO EN 10225-2 S355JS. ADDED ITEM 15.	5913
A	PRODUCTION RELEASE	3286
REV	REVISION DESCRIPTION	ECN


WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED
INTERPRET DRAWING PER ASME Y14.5-2009
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996
REMOVE SHARP CORNERS AND BURRS
— RUN OUT
— STRAIGHTNESS .003
— PERPENDICULARITY .010 IN 5 INCHES
— PARALLELISM .010 IN 5 INCHES
— FLATNESS .010 or as Shown
125
MACHINED SURFACES
MIN. RADIUS UNLESS SHOWN = 0.03 MAX.

TOLERANCE - UNLESS OTHERWISE SPECIFIED
FABRICATING [IMPERIAL] FABRICATING [METRIC]
0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm
24" to 60" ± 1/8" 610 TO 1525 ± 3 mm
60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm
120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm
280" & OVER ± 1/2" 7112 & OVER ± 13 mm
MACHINING [IMPERIAL] MACHINING [METRIC]
DECIMAL .x ± .030" DECIMAL .x ± .8 mm
DECIMAL .xx ± .015" DECIMAL .xx ± .40 mm
.xxx ± .005" .xxx ± .13 mm
ANGULAR MACHINING ± 1° FABRICATION ± 2°

INITIAL DESIGN		
MODELED	ITC	2018/03/14
DRAWN	ITC	2018/03/14
CHECKED	G.Young	2019-04-25
APPROVED	T.Burke	2019/01/15
RELEASE DATE	2019-04-30	
REVISION		
MODELED	A.Villarreal	2024-03-27
DRAWN	A.Villarreal	2024-03-27
CHECKED	J.Sutter	2024-04-01
APPROVED	M.Querol	2024-05-08
REVISION RELEASE DATE	2024-05-08	

SHEET 1 OF 4	
THIRD ANGLE PROJECTION	
	
DO NOT SCALE DRAWING	
SHEET SIZE	D
WELDMENT, PC4100, 4	
EST. WEIGHT	SCALE
3697.9 Kg [8135.38 lbs]	1:20



G
F
E
D
C
B
A


G
F
E
D
C
B
A

11 10 9 8 IF IN DOUBT.....PLEASE ASK!


11 10 9 8 IF IN DOUBT.....PLEASE ASK!

5 4 3 2 1

5 4 3 2 1

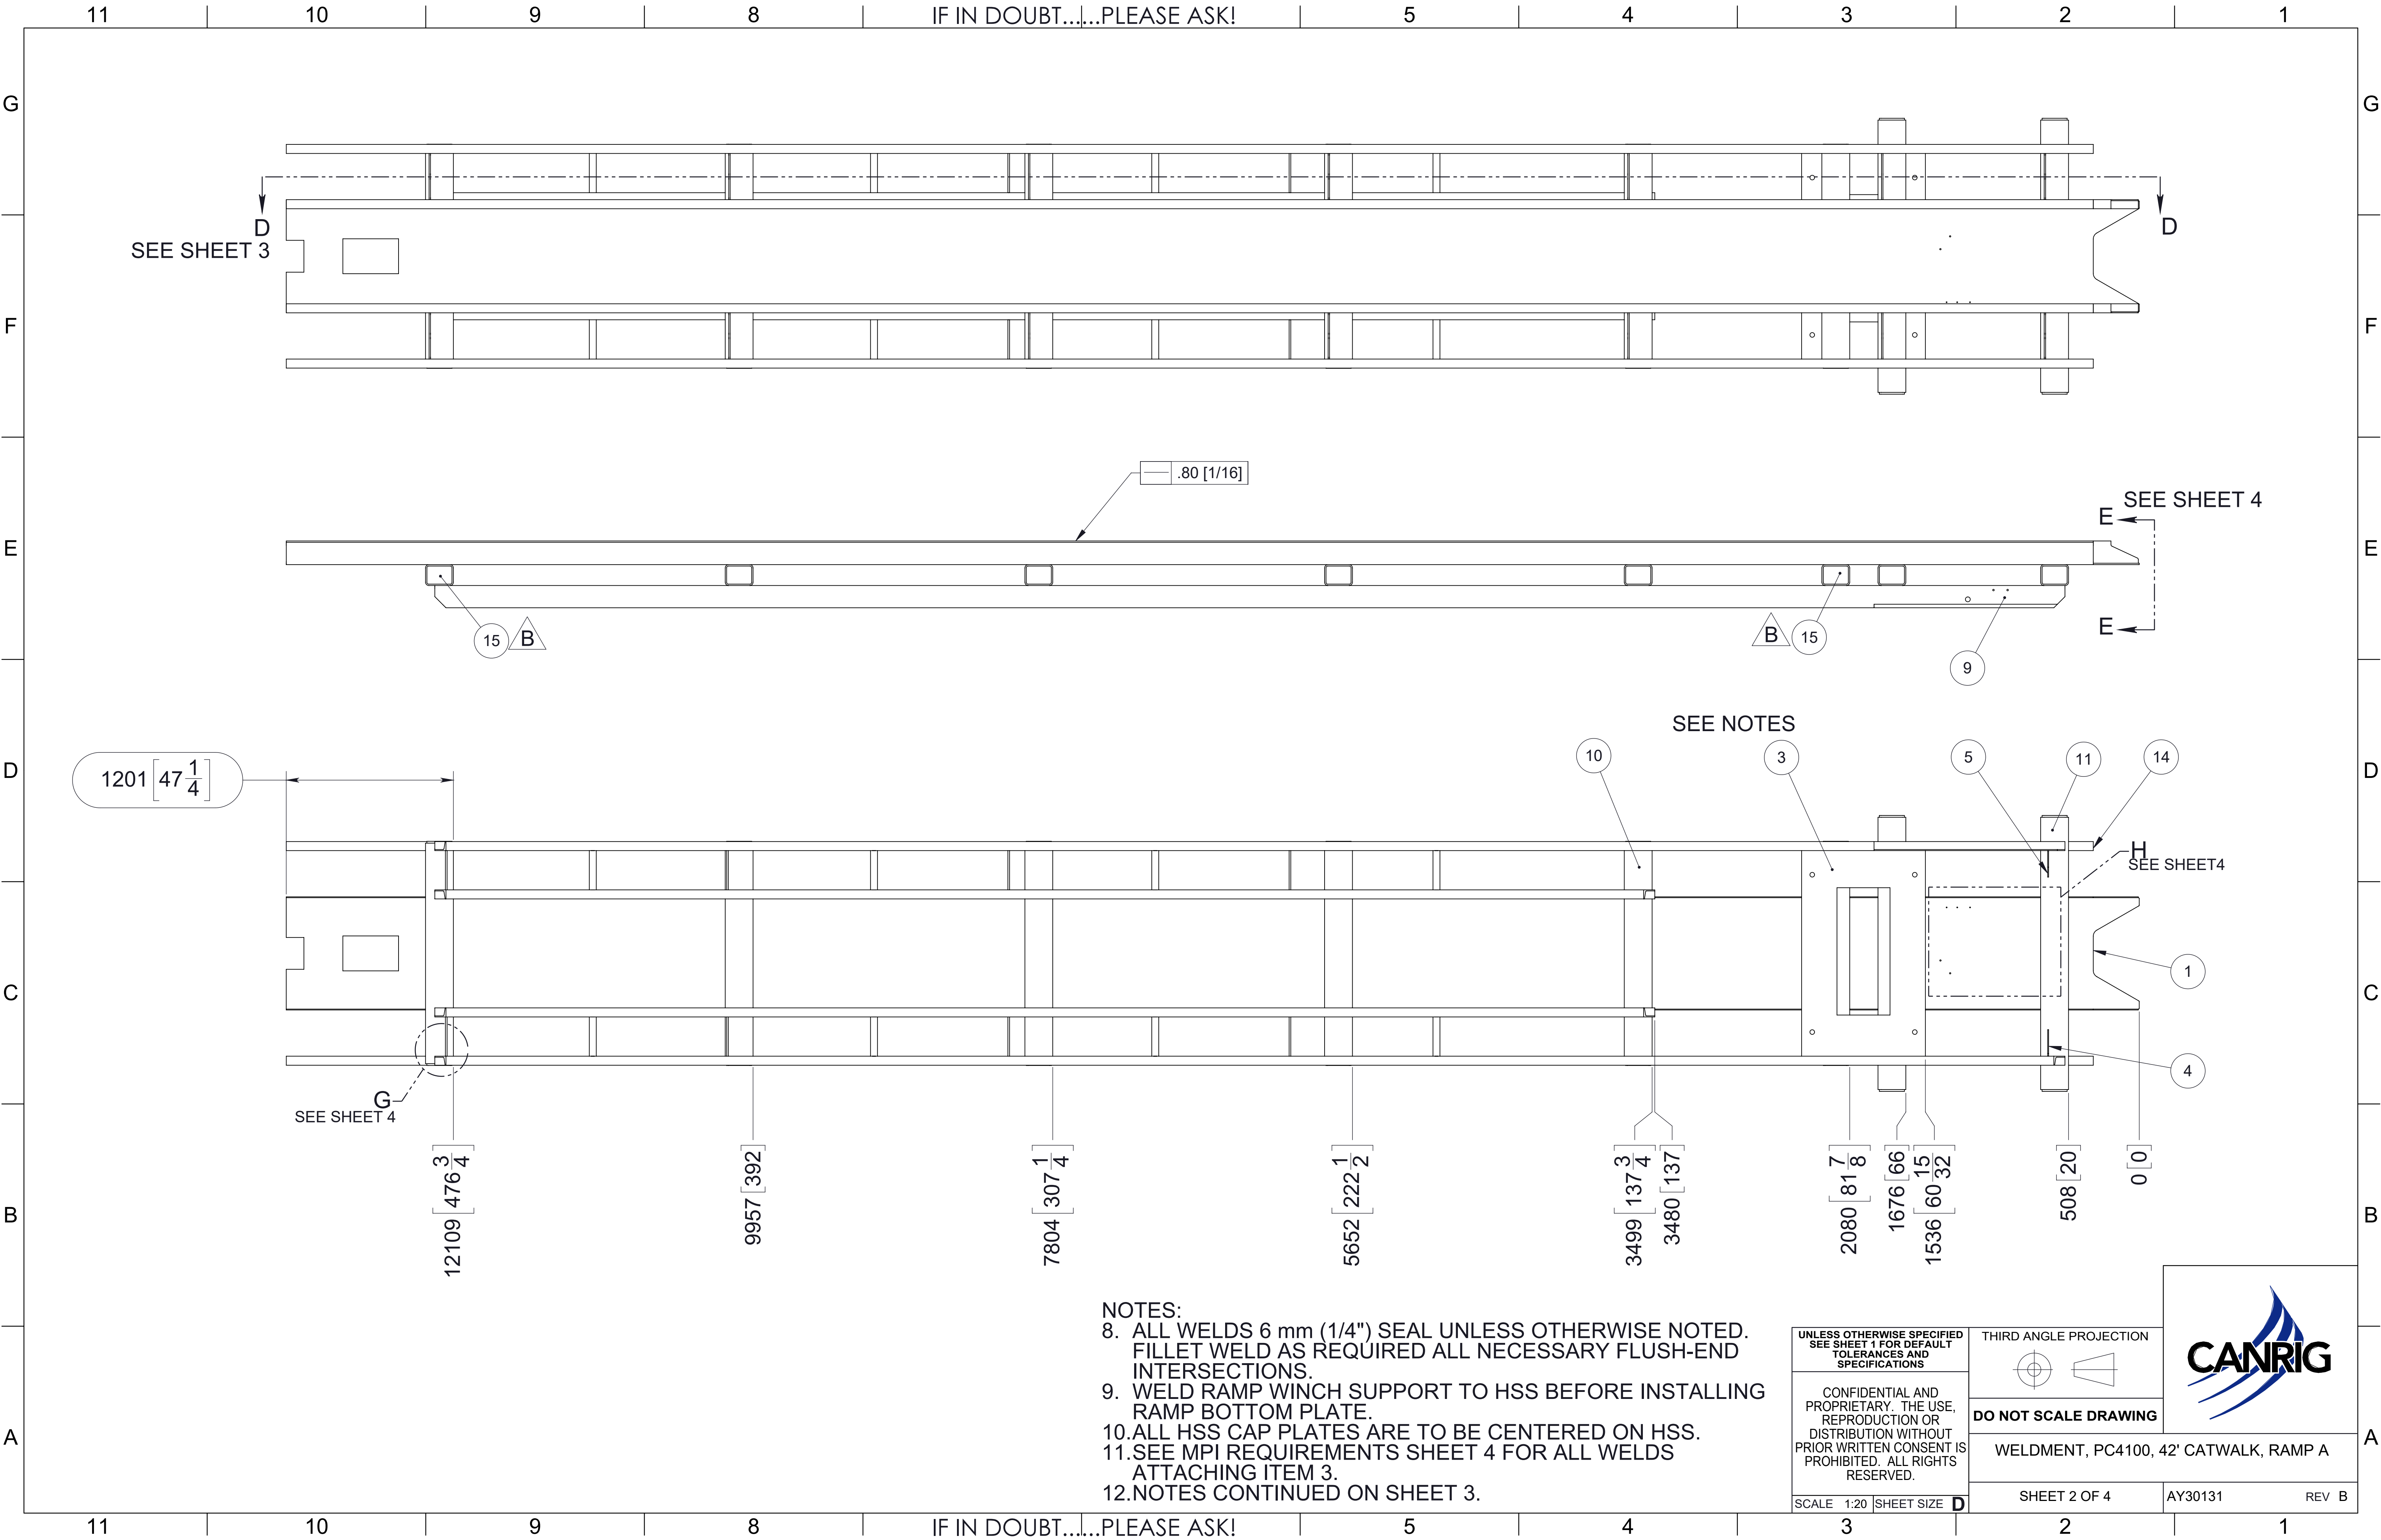

NOTES:
8. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED.
FILLET WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.
9. WELD RAMP WINCH SUPPORT TO HSS BEFORE INSTALLING RAMP BOTTOM PLATE.
10. ALL HSS CAP PLATES ARE TO BE CENTERED ON HSS.
11. SEE MPI REQUIREMENTS SHEET 4 FOR ALL WELDS ATTACHING ITEM 3.
12. NOTES CONTINUED ON SHEET 3.

UNLESS OTHERWISE SPECIFIED SEE SHEET 1 FOR DEFAULT TOLERANCES AND SPECIFICATIONS		THIRD ANGLE PROJECTION		
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.				
		DO NOT SCALE DRAWING		
		WELDMENT, PC4100, 42' CATWALK, RAMP A		
		SHEET 2 OF 4		AY30131
SCALE 1:20	SHEET SIZE D			REV B

