

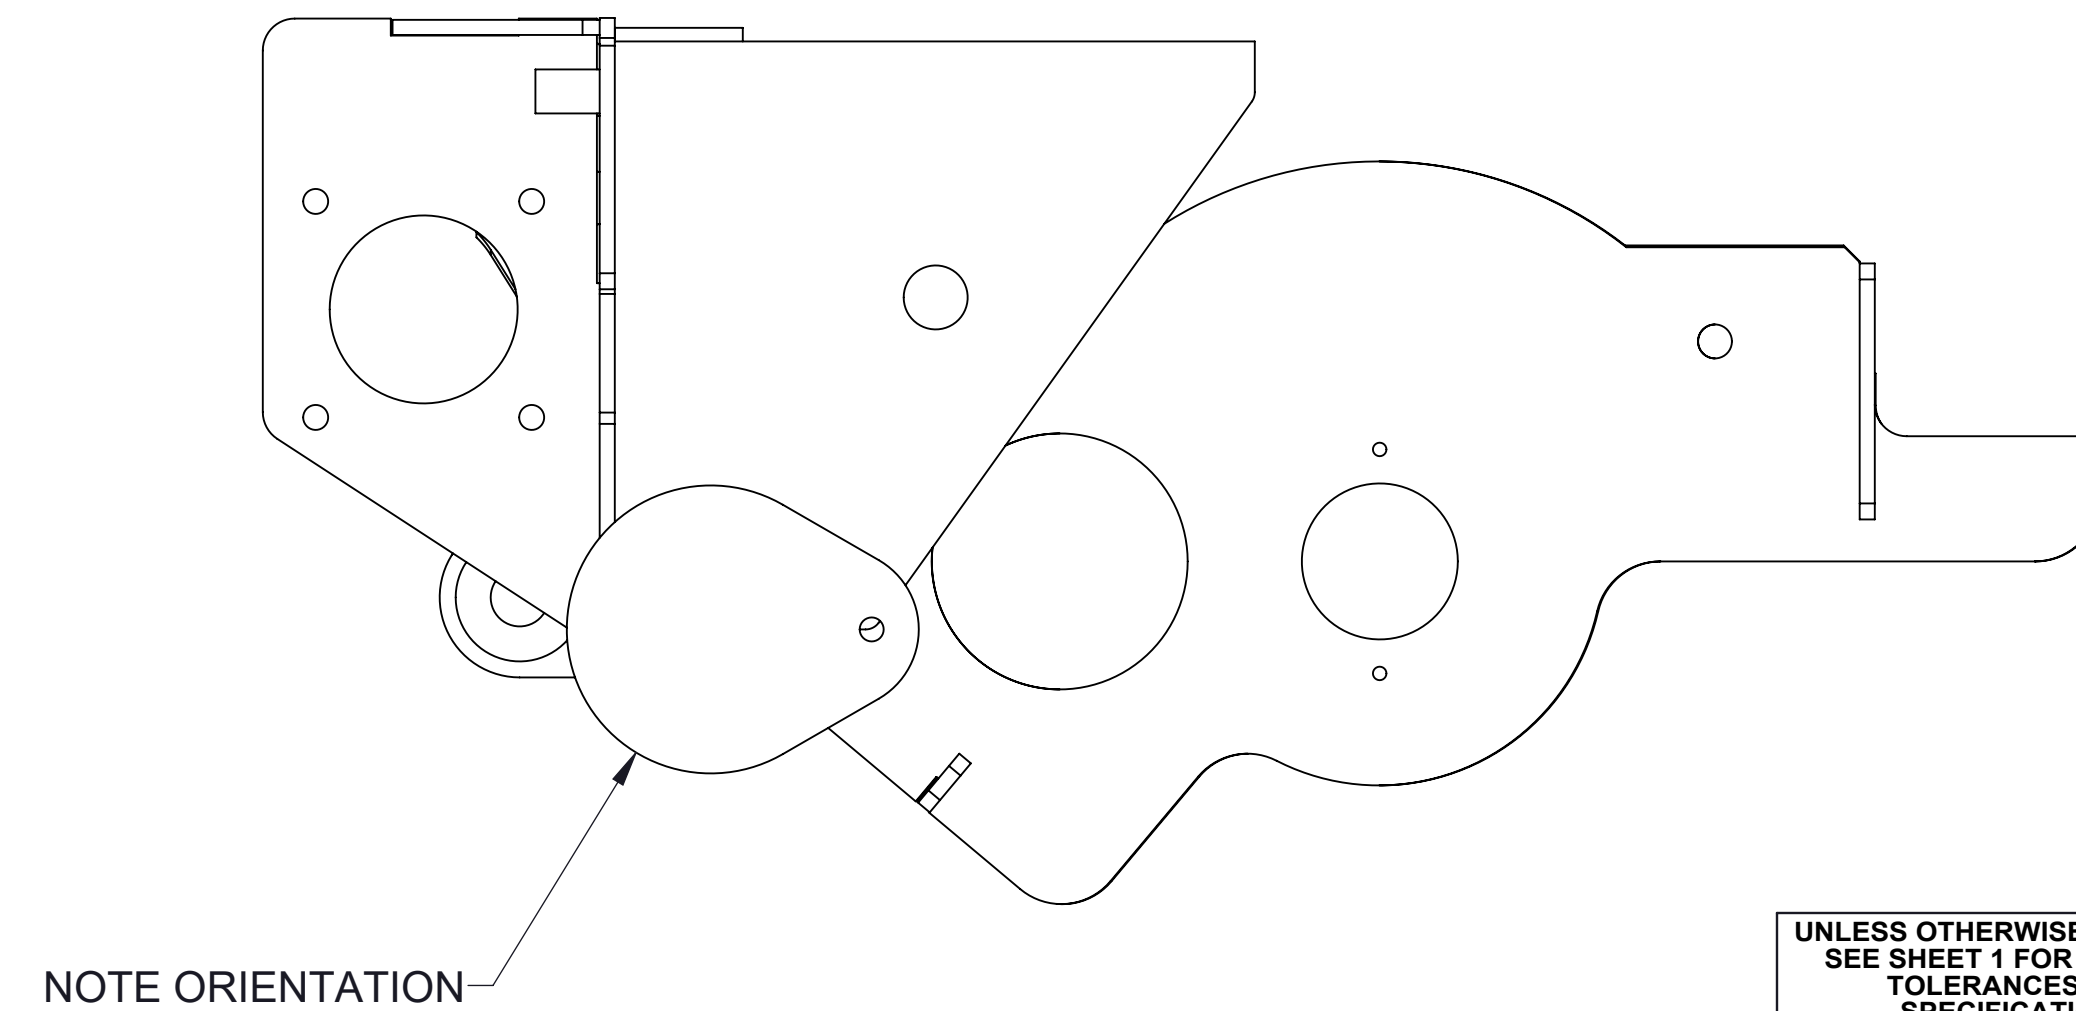
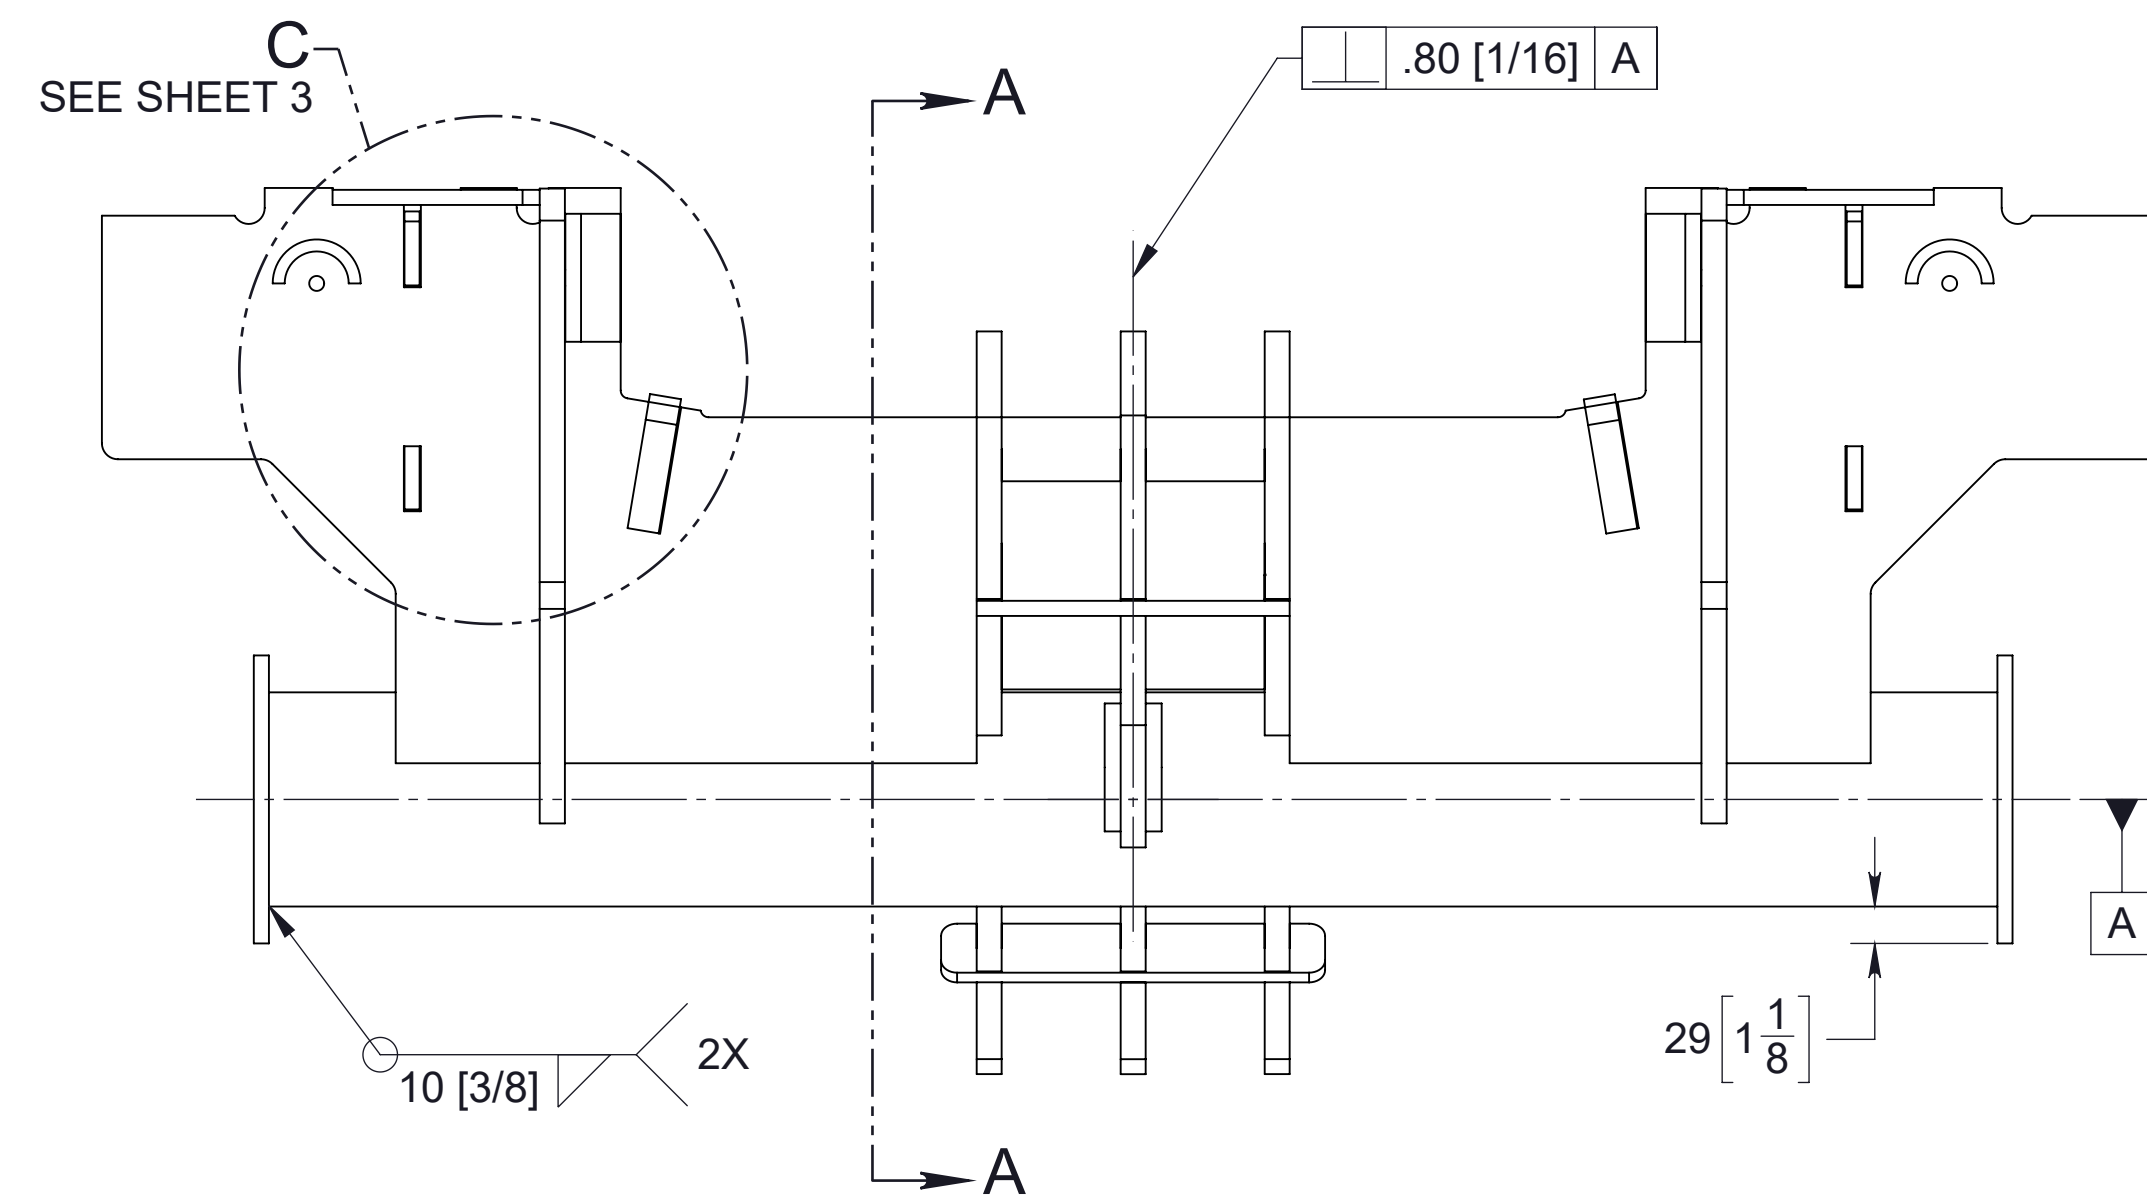
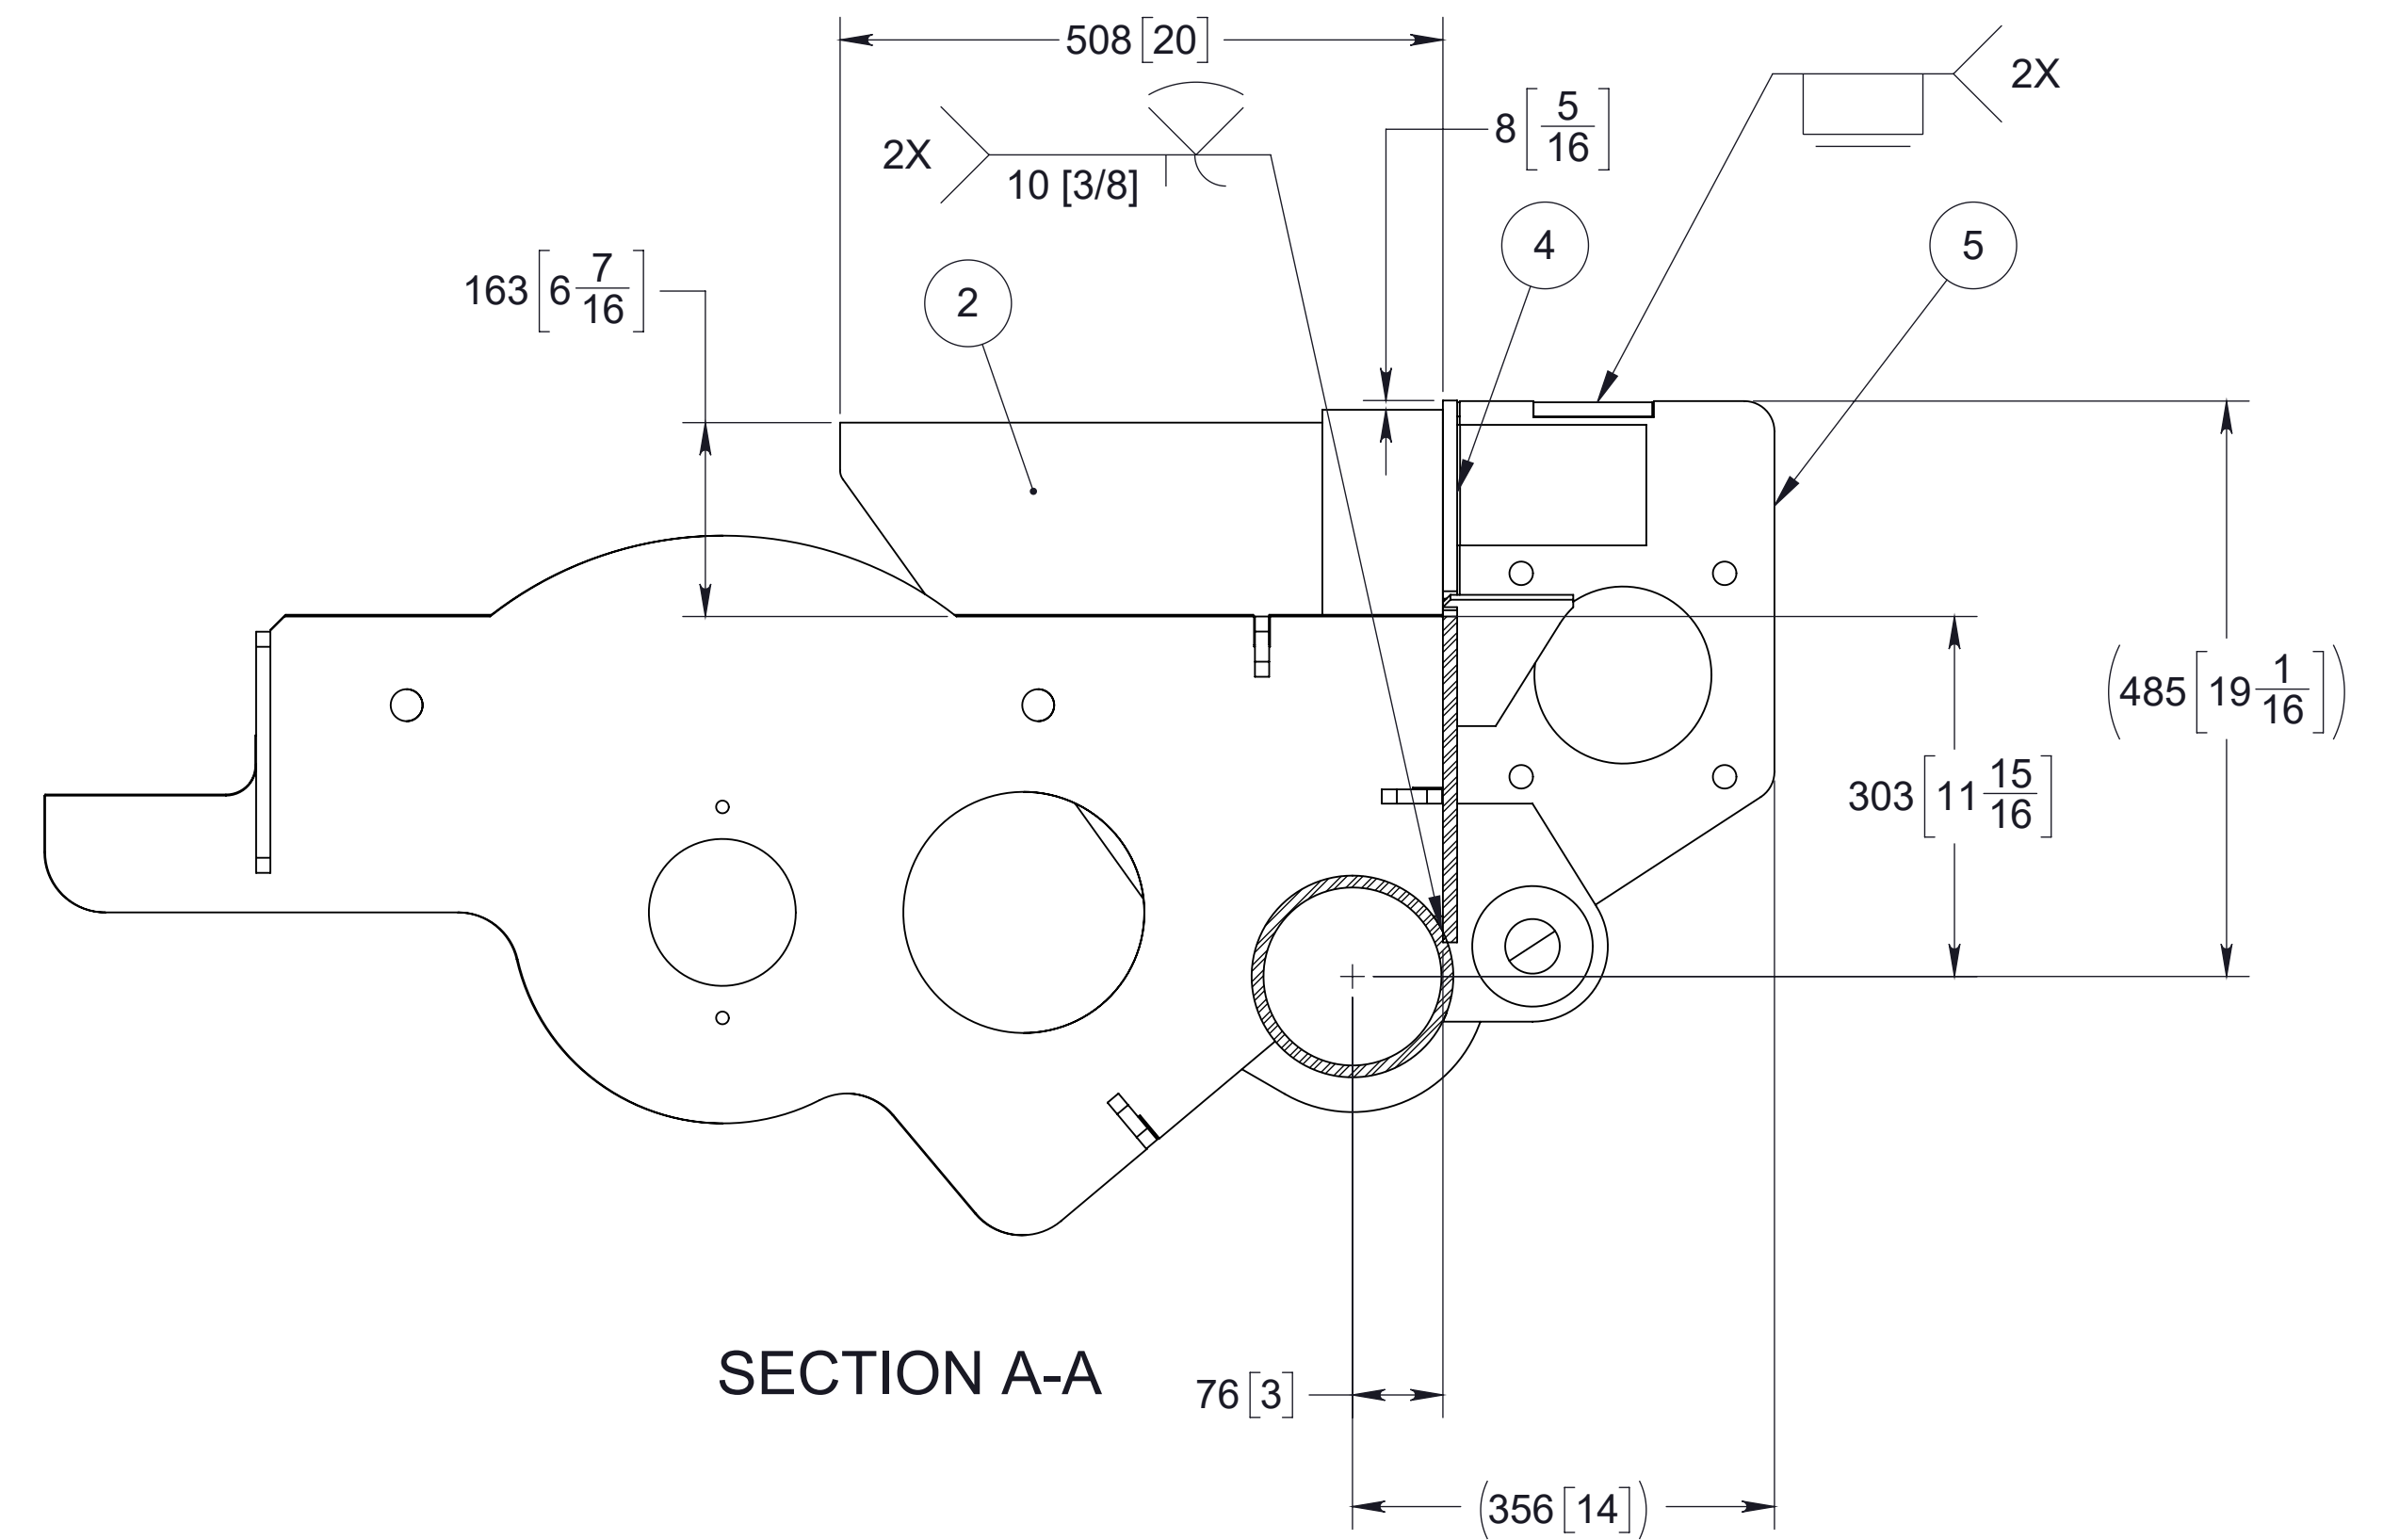


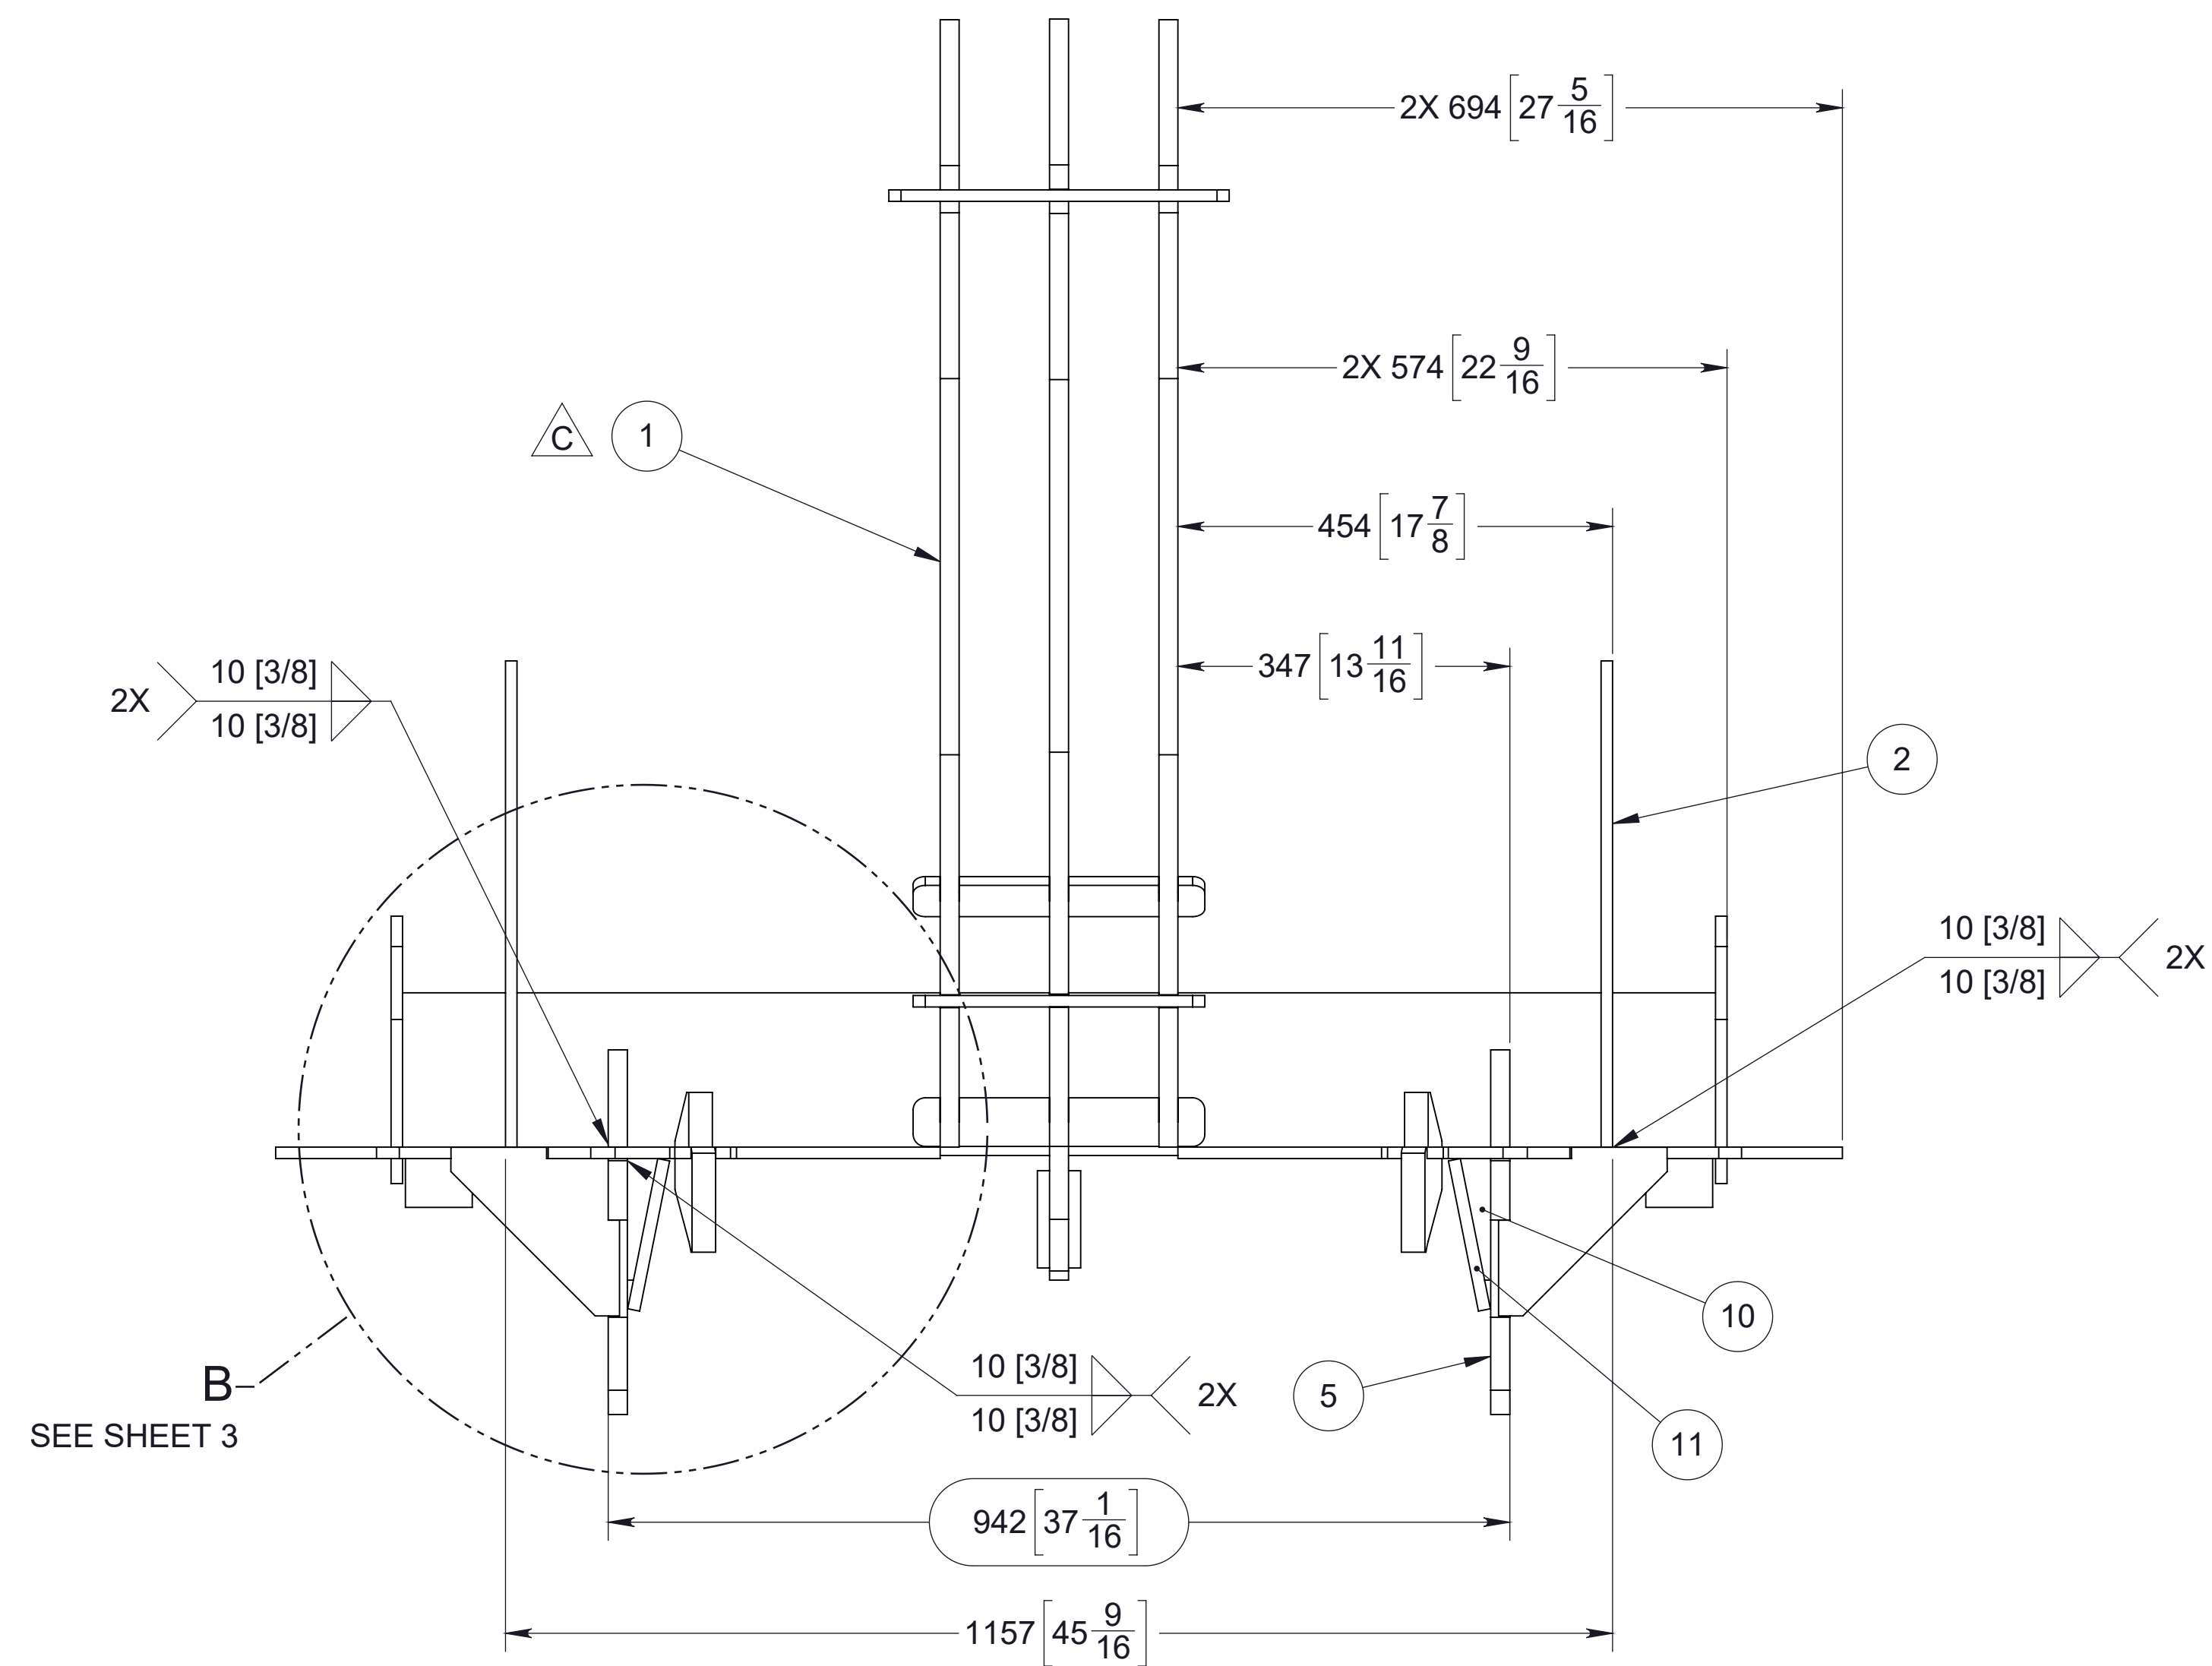

- NOTES:
- ALL WELDS 6 mm (1/4") FILLET SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.
 - NOTES CONTINUED ON SHEET 3.

UNLESS OTHERWISE SPECIFIED
SEE SHEET 1 FOR DEFAULT
TOLERANCES AND
SPECIFICATIONS

0	THIRD ANGLE PROJECTION
---	------------------------



CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.




WELDMENT, RAMP, SHEAVE SUB B, , PC4100

SCALE	1:6	SHEET SIZE	D
-------	-----	------------	---

SHEET 2 OF 3

AY30134

REV C

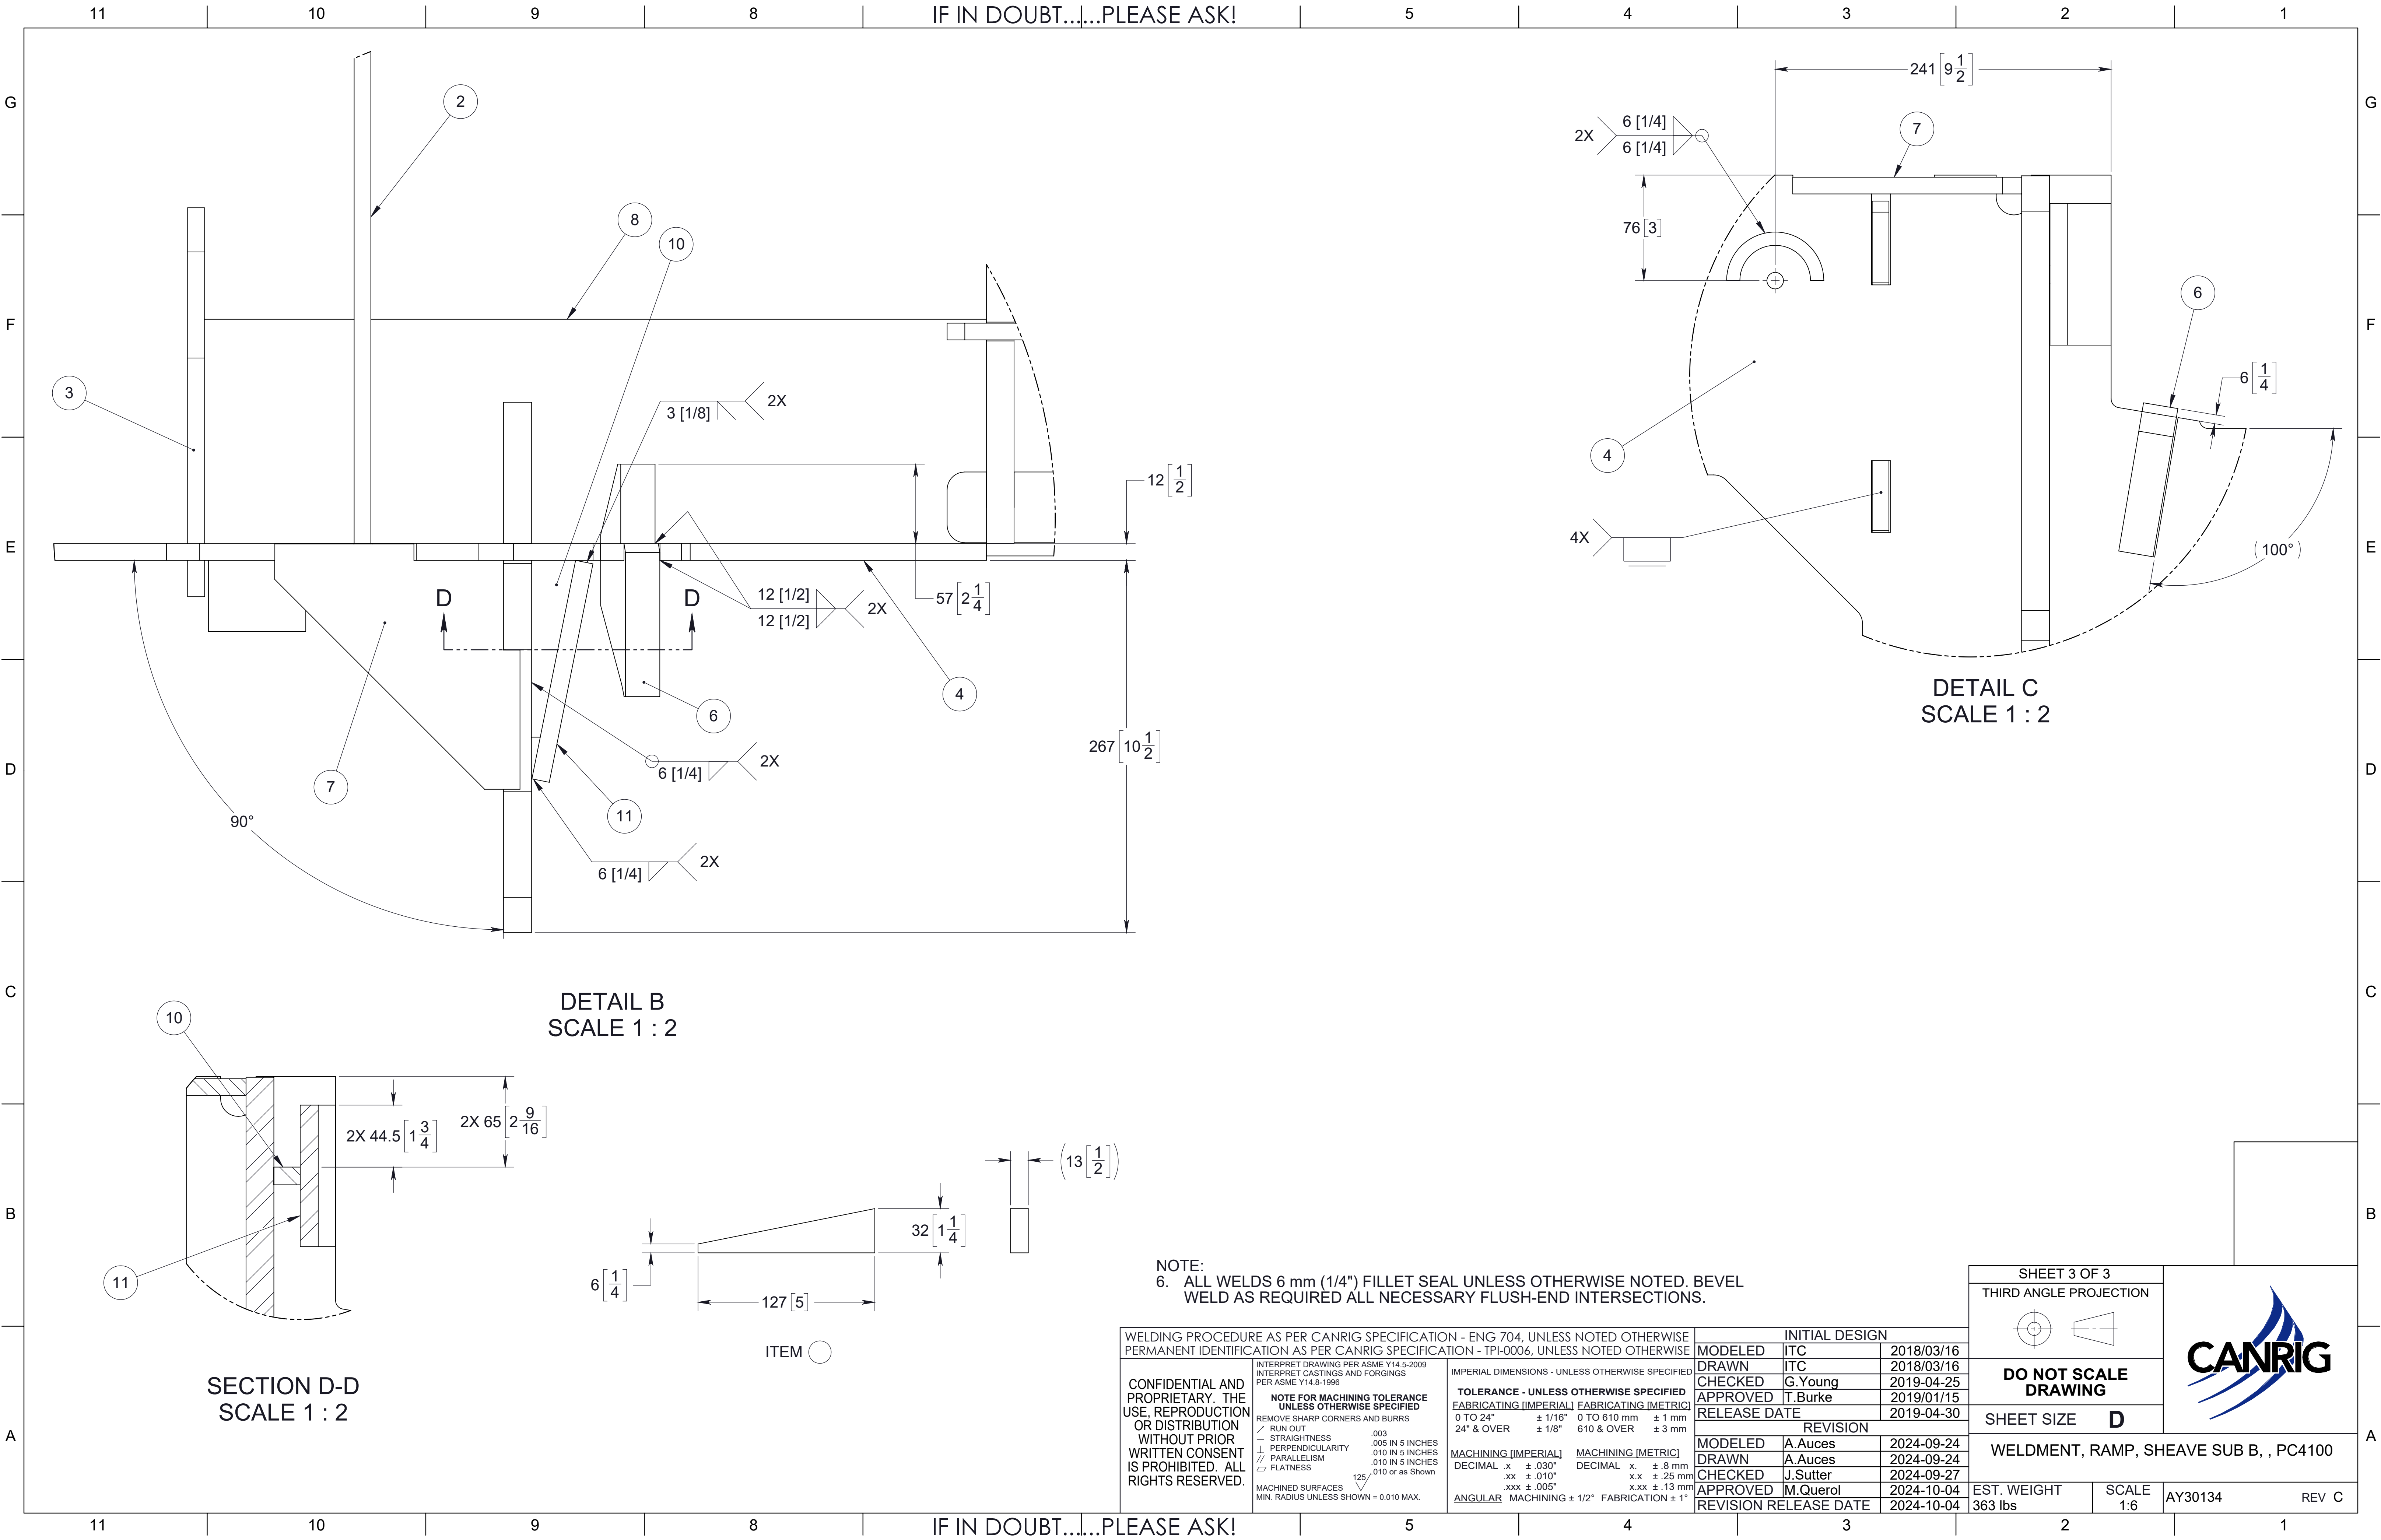

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE		
PERMANENT IDENTIFICATION AS PER CANRIG SPECIFICATION - TPI-0006, UNLESS NOTED OTHERWISE		
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	INTERPRET DRAWING PER ASME Y14.5-2009	
	INTERPRET CASTINGS AND FORGINGS	
	PER ASME Y14.8-1996	
	NOTE FOR MACHINING TOLERANCE UNLESS OTHERWISE SPECIFIED	
	REMOVE SHARP CORNERS AND BURRS	
	✓ RUN OUT	.003
	— STRAIGHTNESS	.005 IN 5 INCHES
	⊥ PERPENDICULARITY	.010 IN 5 INCHES
	∥ PARALLELISM	.010 IN 5 INCHES
	⊥ FLATNESS	.010 or as Shown
		
MACHINED SURFACES		
MIN. RADIUS UNLESS SHOWN = 0.010 MAX.		
IMPERIAL DIMENSIONS - UNLESS OTHERWISE SPECIFIED		
TOLERANCE - UNLESS OTHERWISE SPECIFIED		
FABRICATING [IMPERIAL] FABRICATING [METRIC]		
0 TO 24" ± 1/16" 0 TO 610 mm ± 1 mm		
24" & OVER ± 1/8" 610 & OVER ± 3 mm		
MACHINING [IMPERIAL] MACHINING [METRIC]		
DECIMAL .x ± .030" DECIMAL x. ± .8 mm		
.xx ± .010" x.xx ± .25 mm		
.xxx ± .005" x.xxx ± .13 mm		
ANGULAR MACHINING ± 1/2° FABRICATION ± 1°		

SHEET 3 OF 3		
THIRD ANGLE PROJECTION		
DO NOT SCALE DRAWING		
SHEET SIZE D		
WELDMNT, RAMP, SHEAVE SUB B, , PC4100		
EST. WEIGHT	SCALE	AY30134
363 lbs	1:6	REV C