


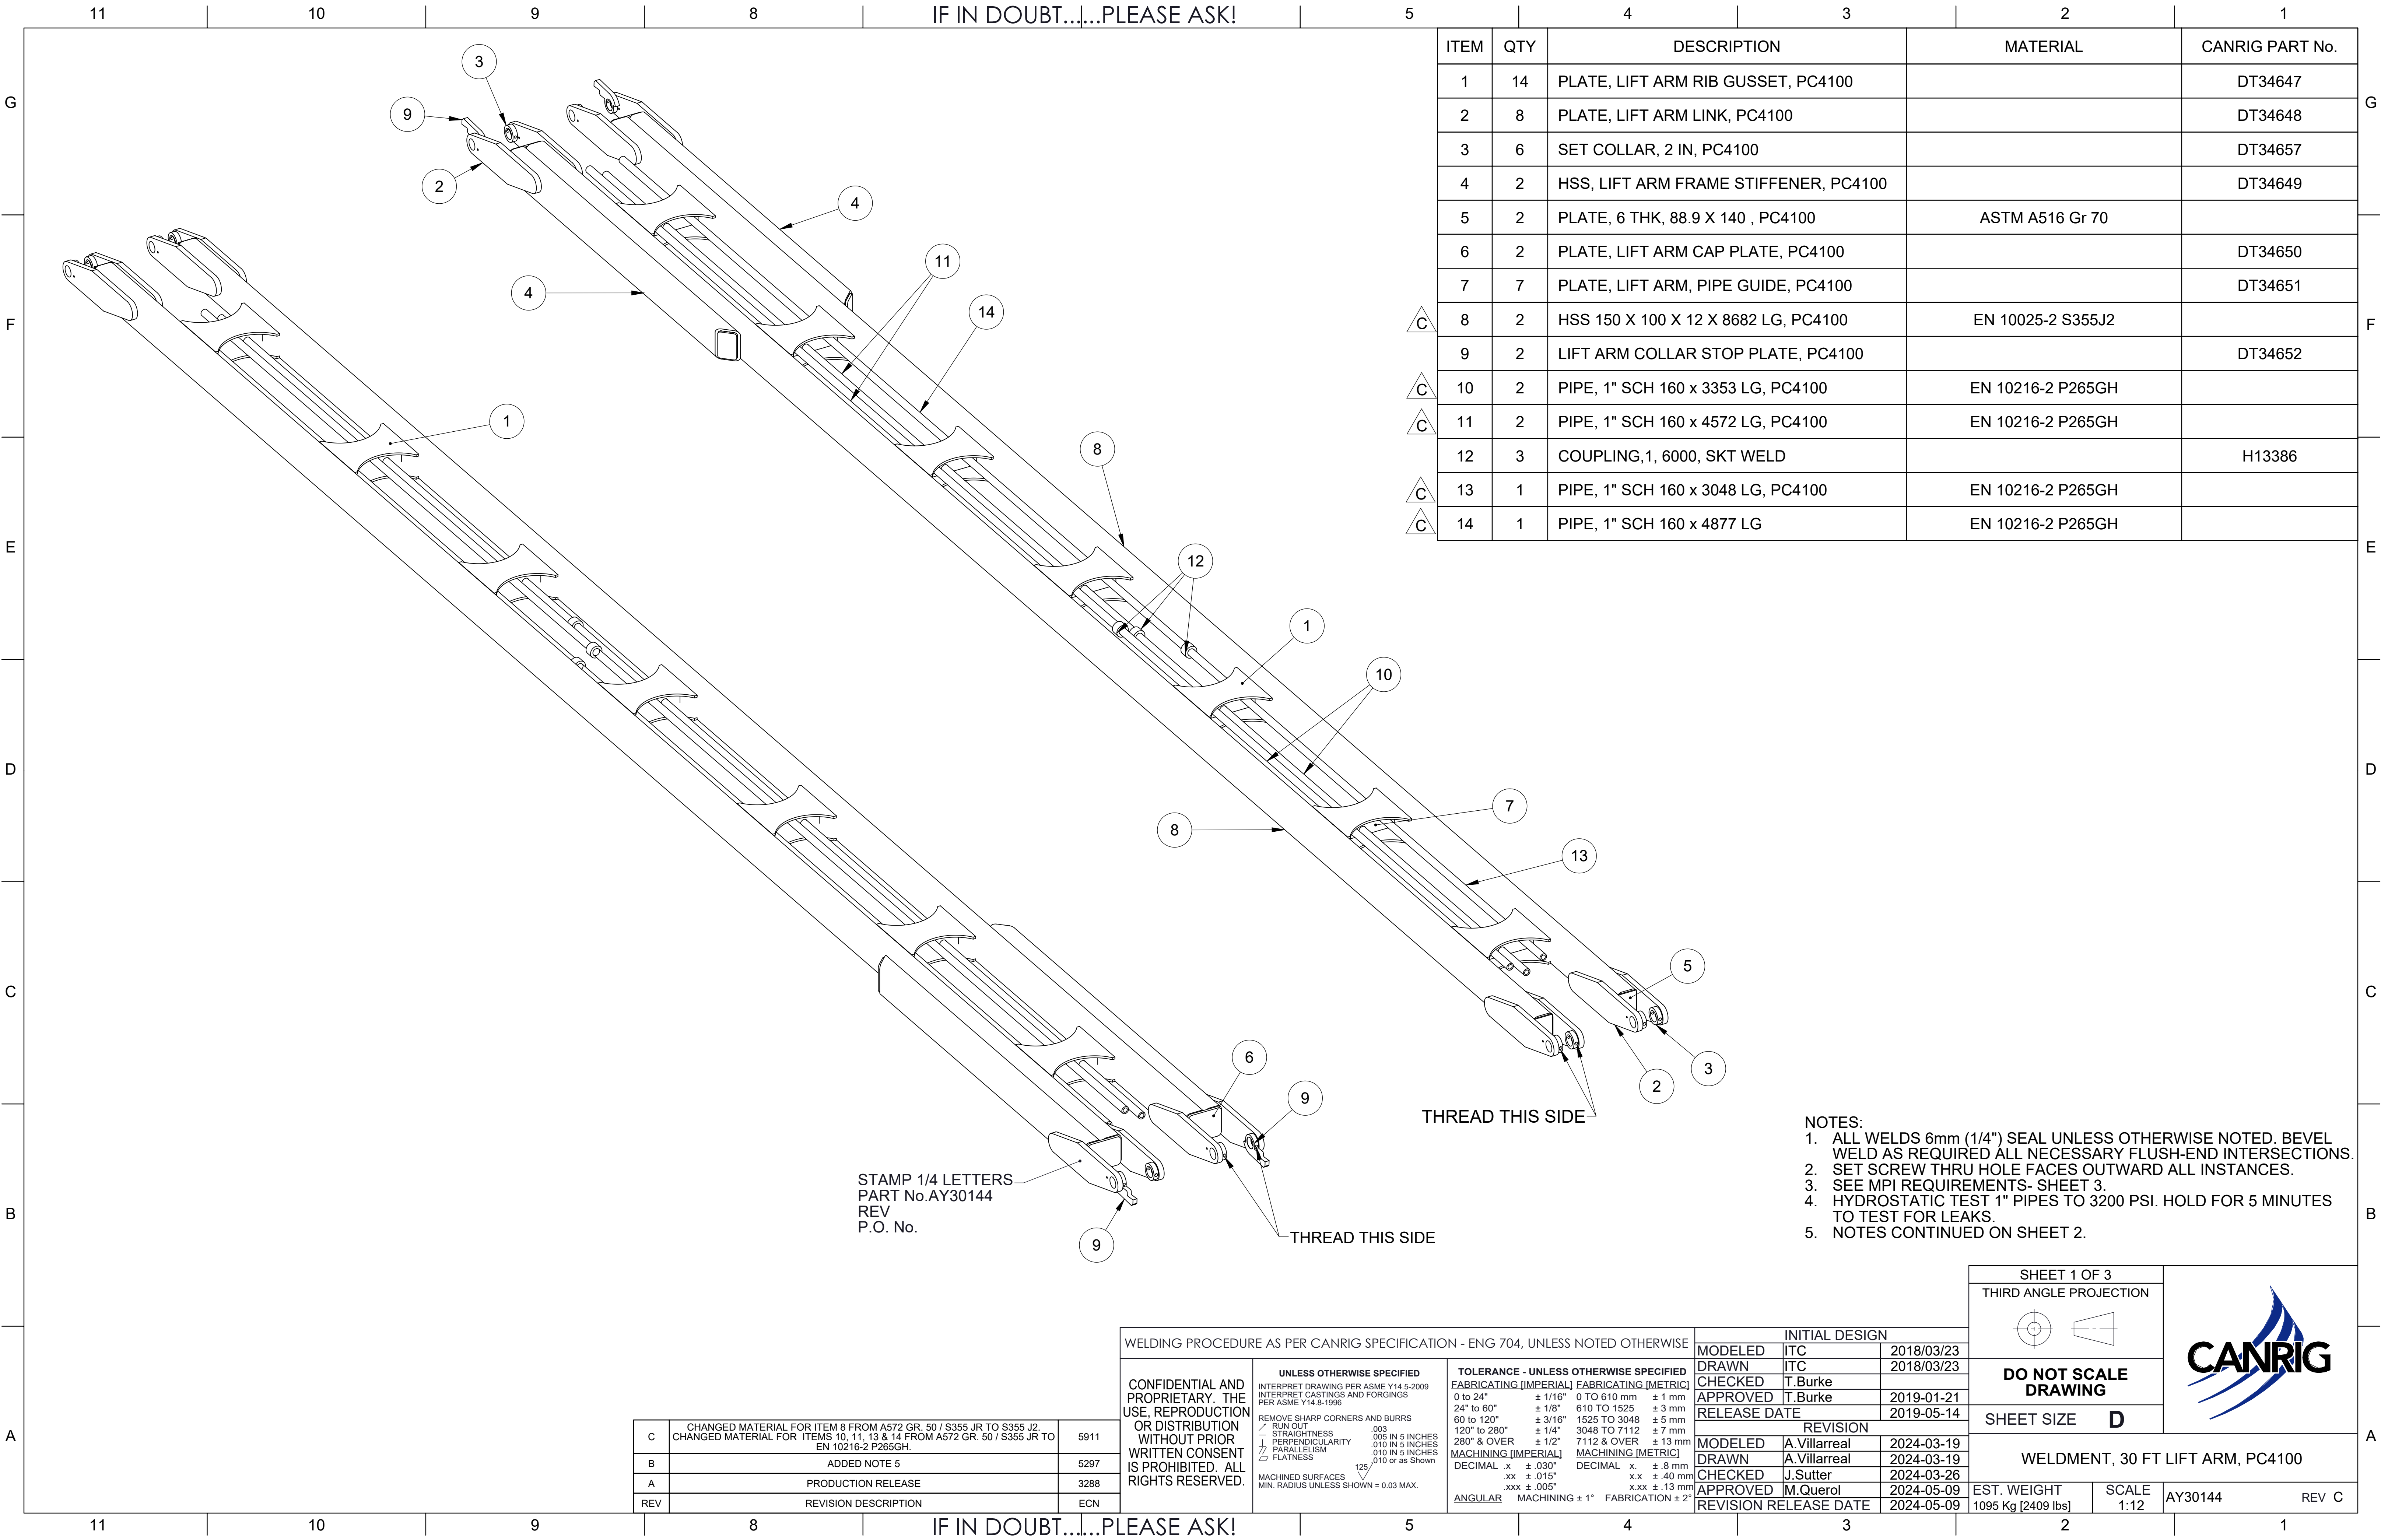



ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	14	PLATE, LIFT ARM RIB GUSSET, PC4100		DT34647
2	8	PLATE, LIFT ARM LINK, PC4100		DT34648
3	6	SET COLLAR, 2 IN, PC4100		DT34657
4	2	HSS, LIFT ARM FRAME STIFFENER, PC4100		DT34649
5	2	PLATE, 6 THK, 88.9 X 140 , PC4100	ASTM A516 Gr 70	
6	2	PLATE, LIFT ARM CAP PLATE, PC4100		DT34650
7	7	PLATE, LIFT ARM, PIPE GUIDE, PC4100		DT34651
8	2	HSS 150 X 100 X 12 X 8682 LG, PC4100	EN 10025-2 S355J2	
9	2	LIFT ARM COLLAR STOP PLATE, PC4100		DT34652
10	2	PIPE, 1" SCH 160 x 3353 LG, PC4100	EN 10216-2 P265GH	
11	2	PIPE, 1" SCH 160 x 4572 LG, PC4100	EN 10216-2 P265GH	
12	3	COUPLING,1, 6000, SKT WELD		H13386
13	1	PIPE, 1" SCH 160 x 3048 LG, PC4100	EN 10216-2 P265GH	
14	1	PIPE, 1" SCH 160 x 4877 LG	EN 10216-2 P265GH	

- NOTES:
1. ALL WELDS 6mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.
 2. SET SCREW THRU HOLE FACES OUTWARD ALL INSTANCES.
 3. SEE MPI REQUIREMENTS- SHEET 3.
 4. HYDROSTATIC TEST 1" PIPES TO 3200 PSI. HOLD FOR 5 MINUTES TO TEST FOR LEAKS.
 5. NOTES CONTINUED ON SHEET 2.

C	CHANGED MATERIAL FOR ITEM 8 FROM A572 GR. 50 / S355 JR TO S355 J2. CHANGED MATERIAL FOR ITEMS 10, 11, 13 & 14 FROM A572 GR. 50 / S355 JR TO EN 10216-2 P265GH.	5911
B	ADDED NOTE 5	5297
A	PRODUCTION RELEASE	3288
REV	REVISION DESCRIPTION	ECN

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN										
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	UNLESS OTHERWISE SPECIFIED		TOLERANCE - UNLESS OTHERWISE SPECIFIED		MODELED	ITC	2018/03/23	DO NOT SCALE DRAWING						
	INTERPRET DRAWING PER ASME Y14.5-2009 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996		FABRICATING [IMPERIAL] FABRICATING [METRIC]		DRAWN	ITC	2018/03/23							
	REMOVE SHARP CORNERS AND BURRS / RUN OUT .003 — STRAIGHTNESS .005 IN 5 INCHES ⊥ PERPENDICULARITY .010 IN 5 INCHES // PARALLELISM .010 IN 5 INCHES ▯ FLATNESS .010 or as Shown		0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm		CHECKED	T.Burke	2019-01-21							
	MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX. 125		MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL .x ± .030" DECIMAL .x. ± .8 mm .xx ± .015" .xx ± .40 mm .xxx ± .005" .xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°		RELEASE DATE		2019-05-14	SHEET SIZE D						
					REVISION									
					MODELED	A.Villarreal	2024-03-19							
					DRAWN	A.Villarreal	2024-03-19							
	WELDMENT, 30 FT LIFT ARM, PC4100		EST. WEIGHT		SCALE		AY30144		REV C					
											CHECKED		J.Sutter	2024-03-26
											APPROVED		M.Querol	2024-05-09
1095 Kg [2409 lbs]		1:12		REVISION RELEASE DATE		2024-05-09								

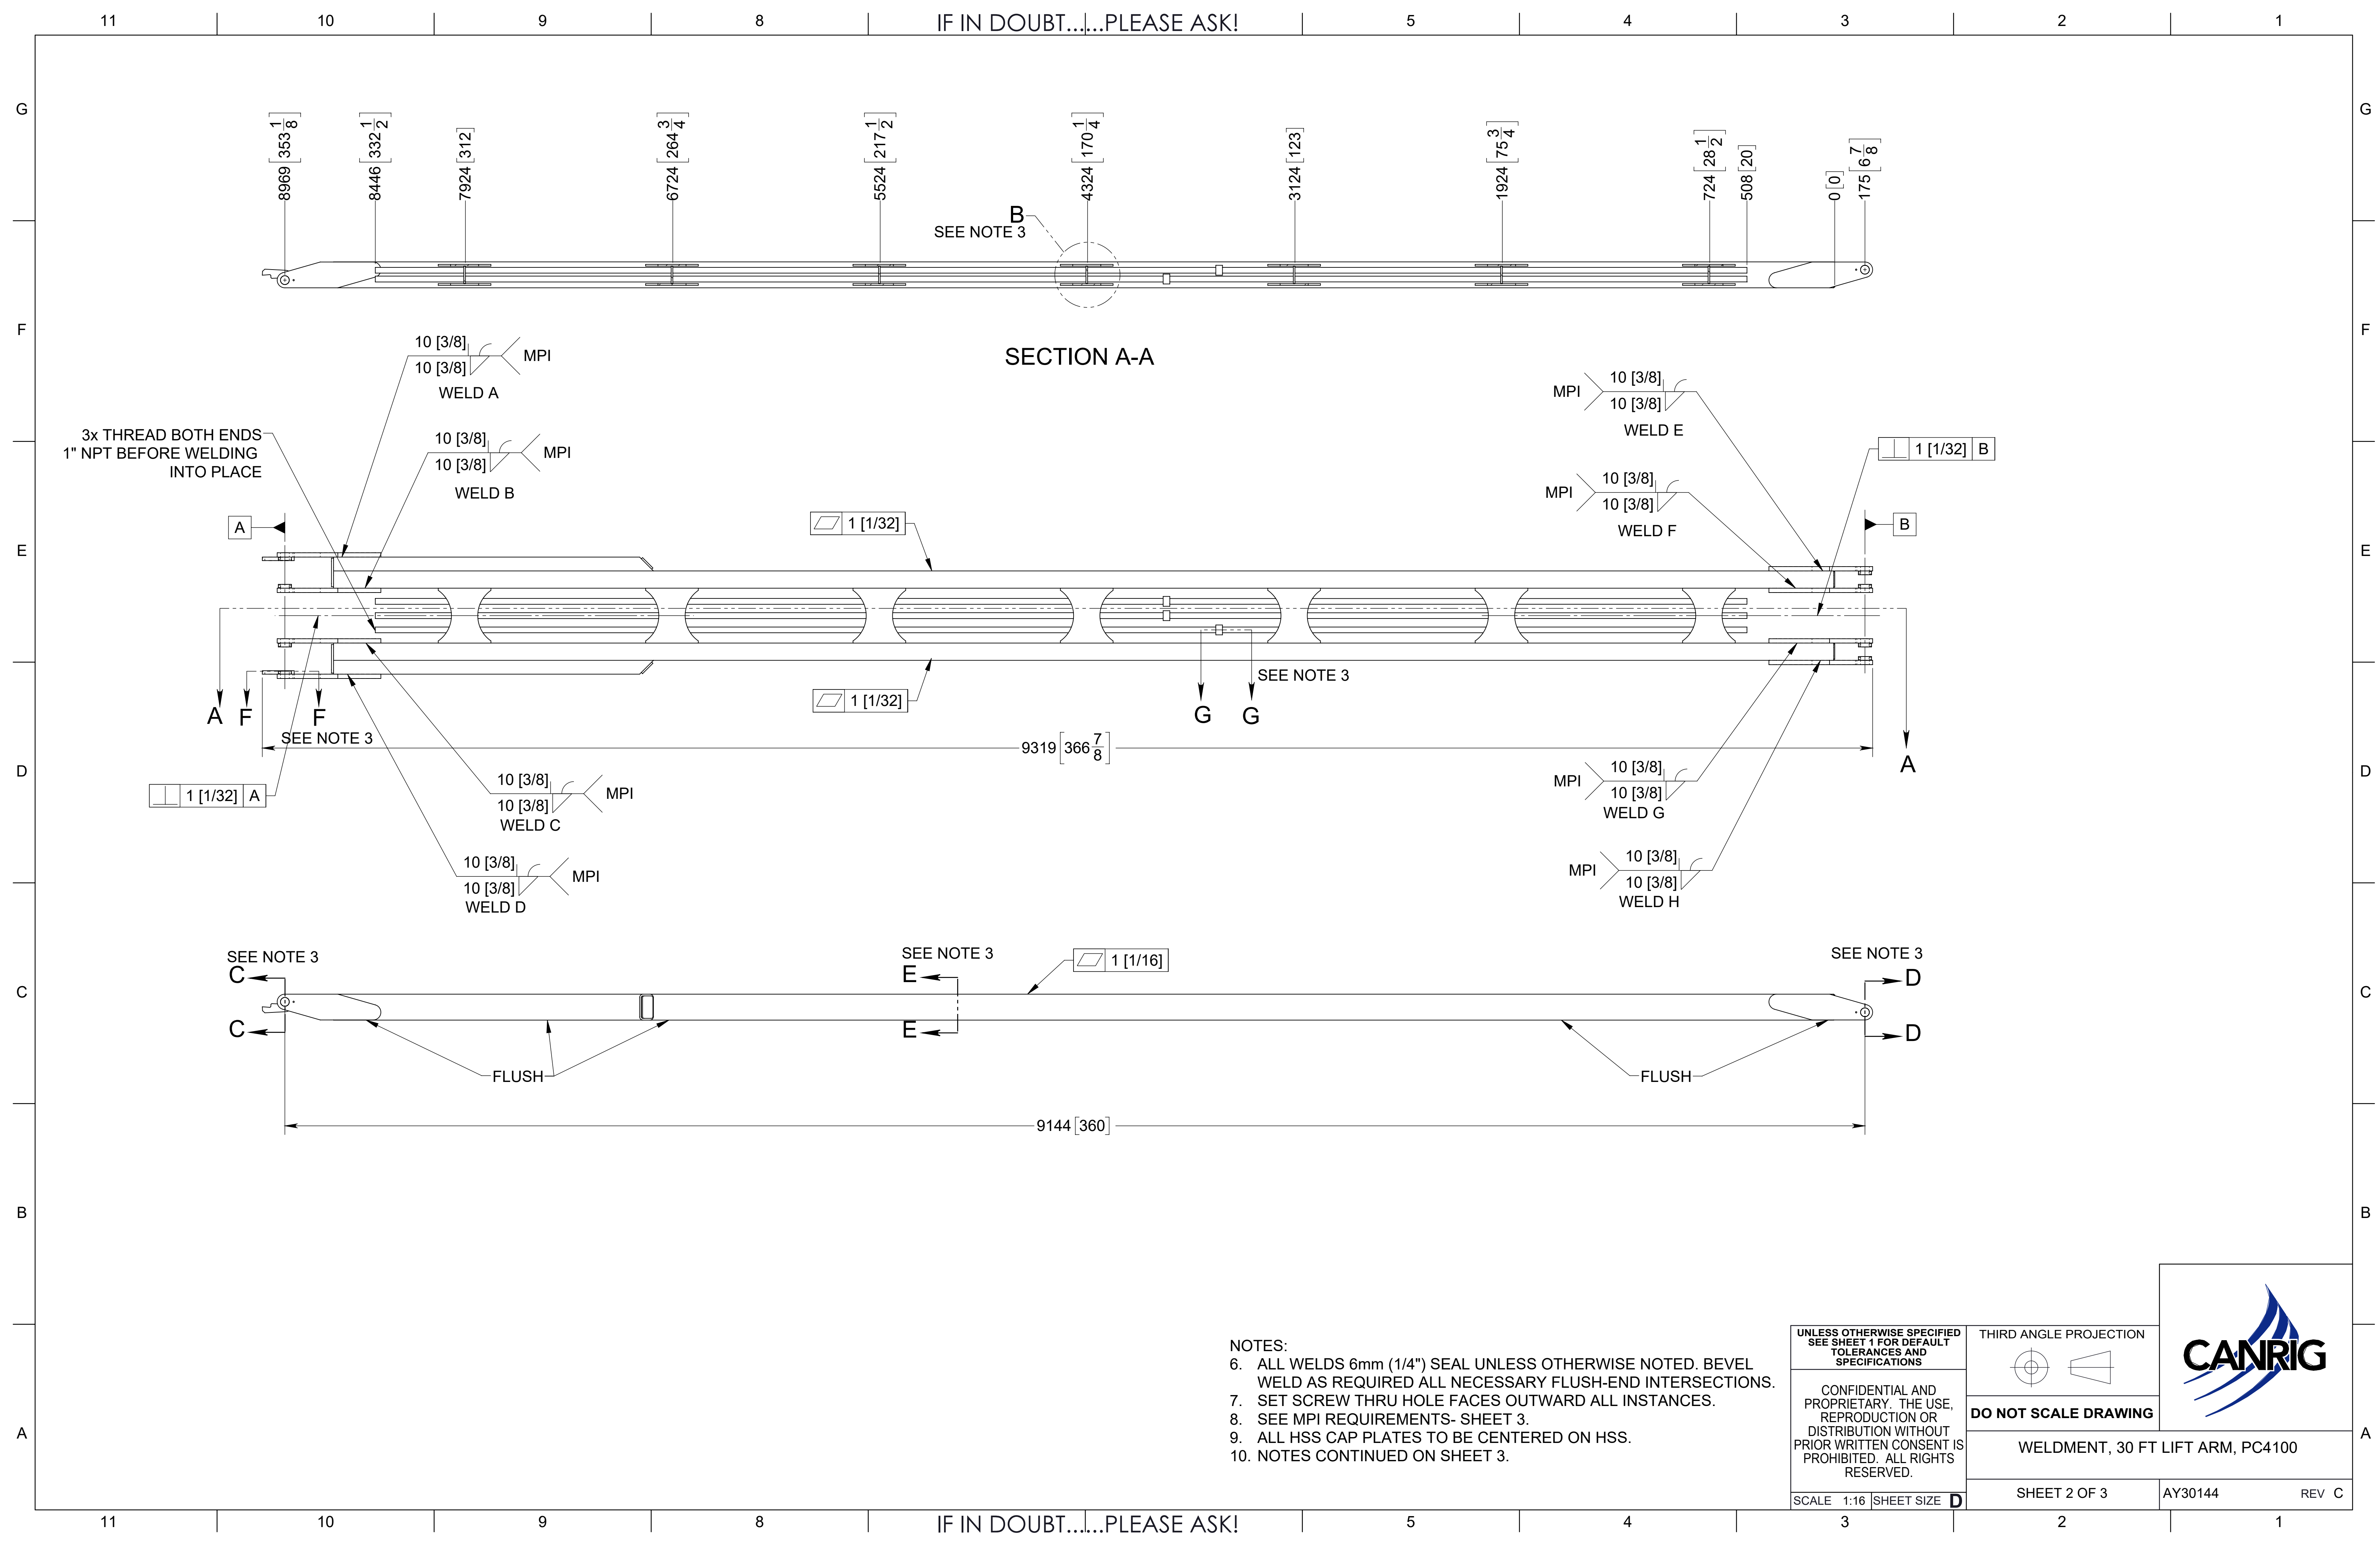

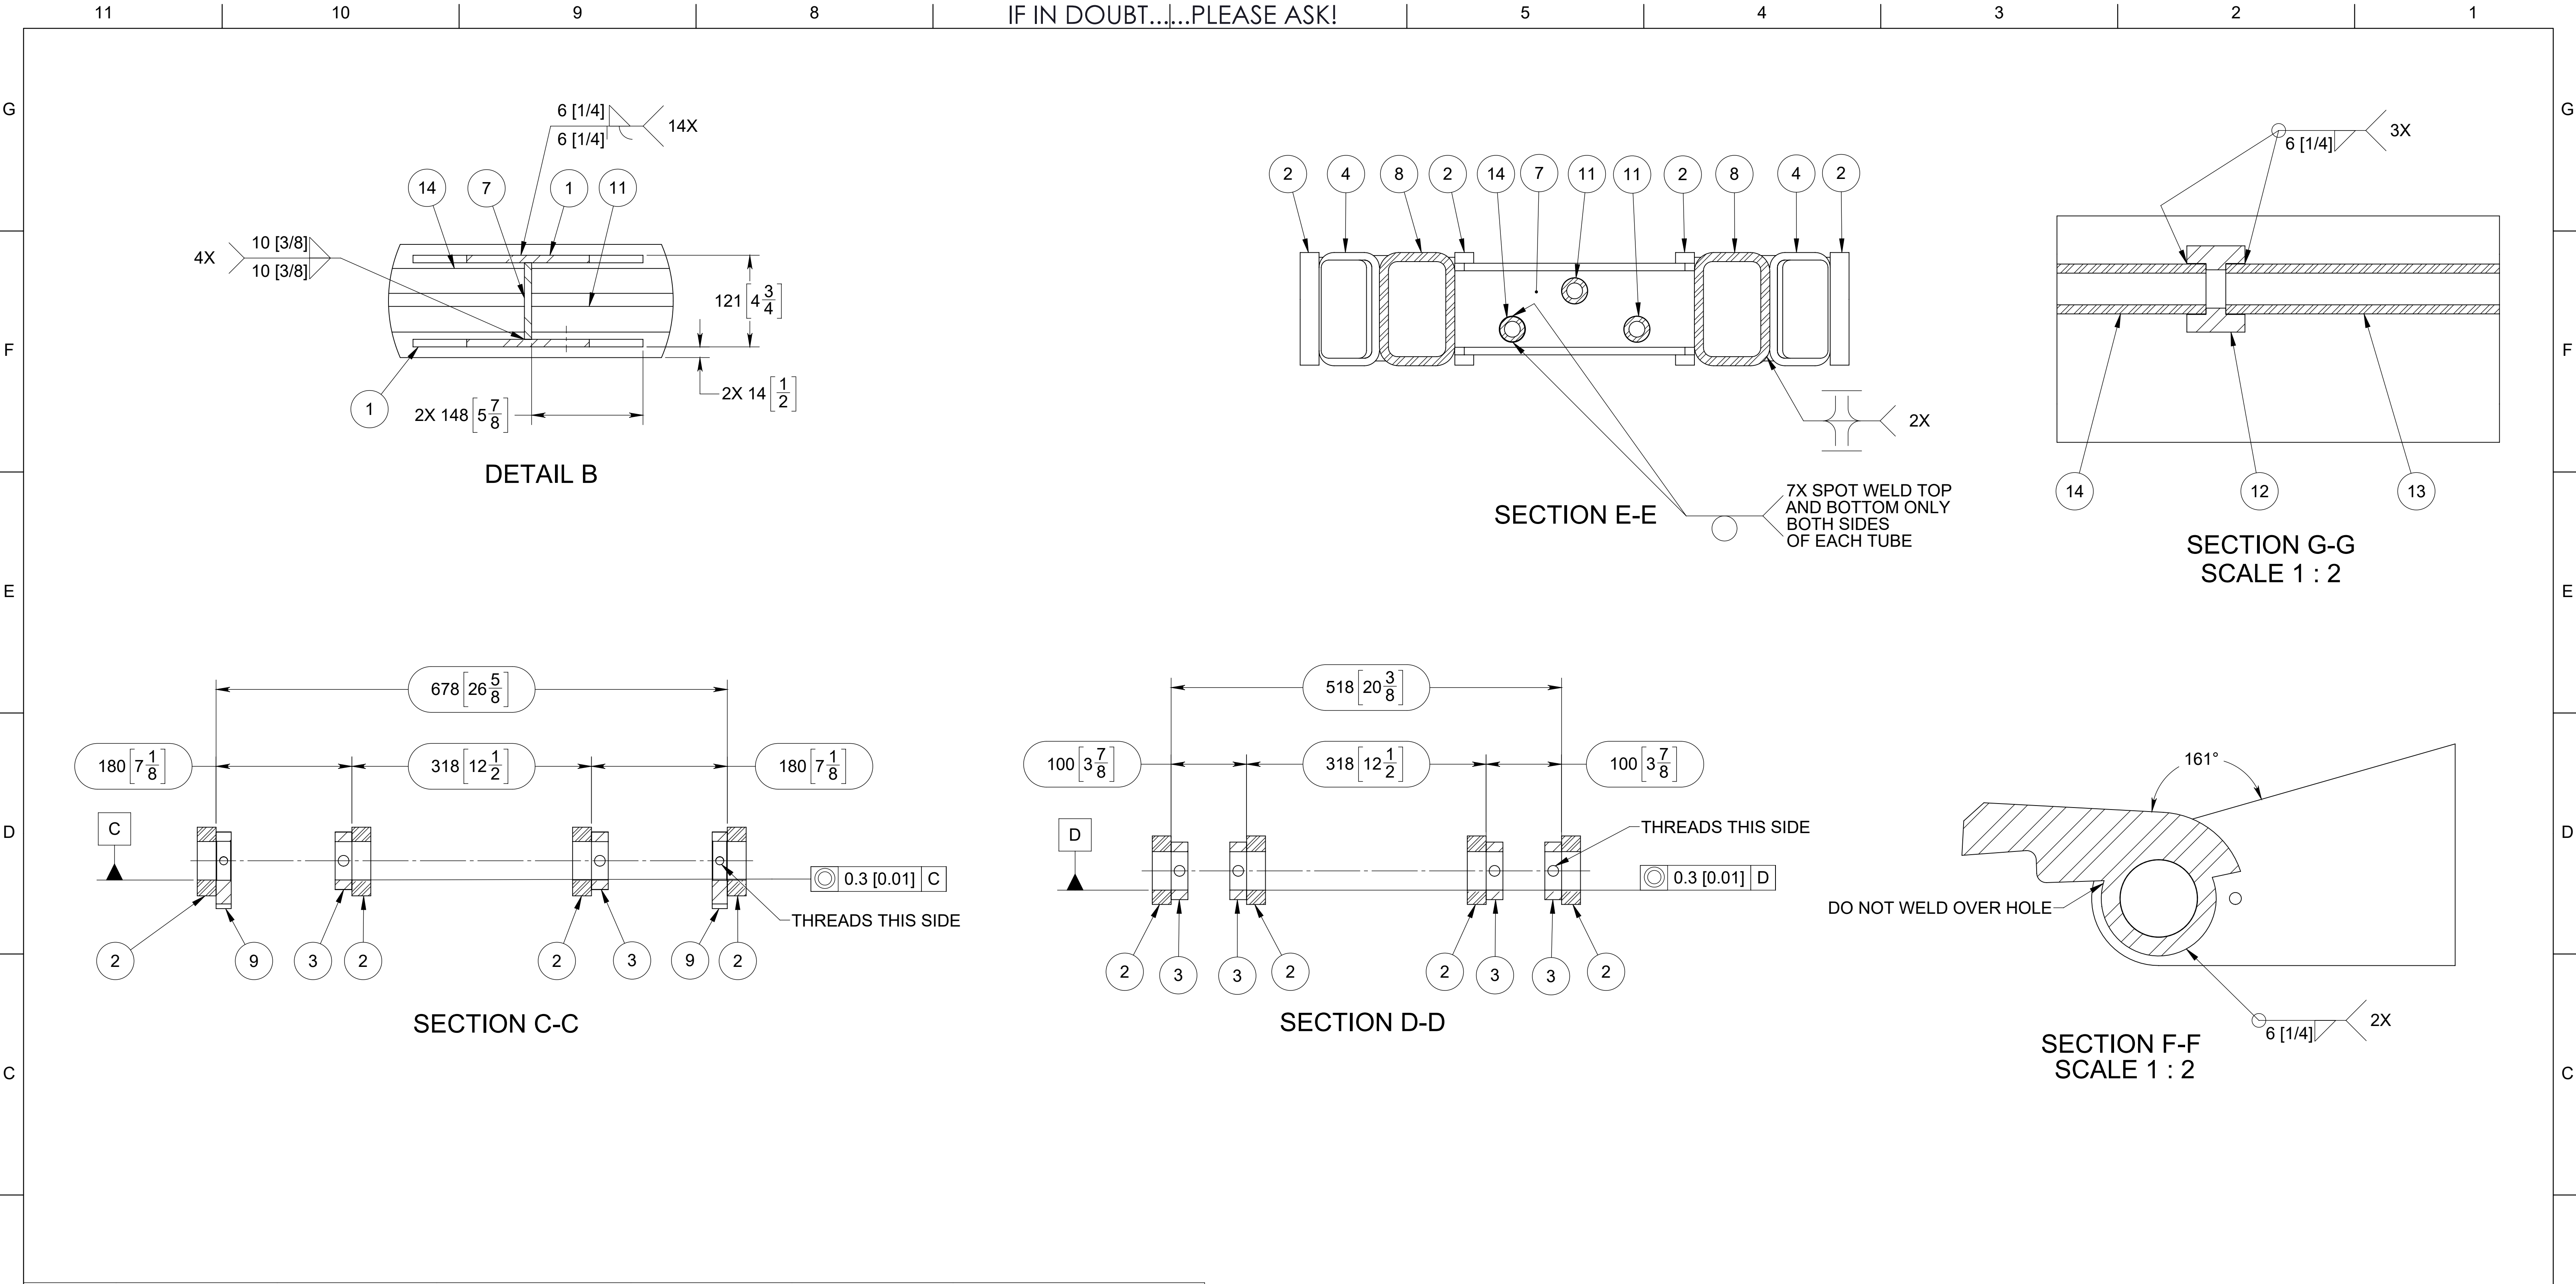

NOTES:
11. ALL WELDS 6mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.
12. SET SCREW THRU HOLE FACES OUTWARD ALL INSTANCES.

UNLESS OTHERWISE SPECIFIED SEE SHEET 1 FOR DEFAULT TOLERANCES AND SPECIFICATIONS

THIRD ANGLE PROJECTION

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

SCALE 1:4 SHEET SIZE D

DO NOT SCALE DRAWING

WELDMENT, 30 FT LIFT ARM, PC4100

SHEET 3 OF 3

AY30144

REV C