

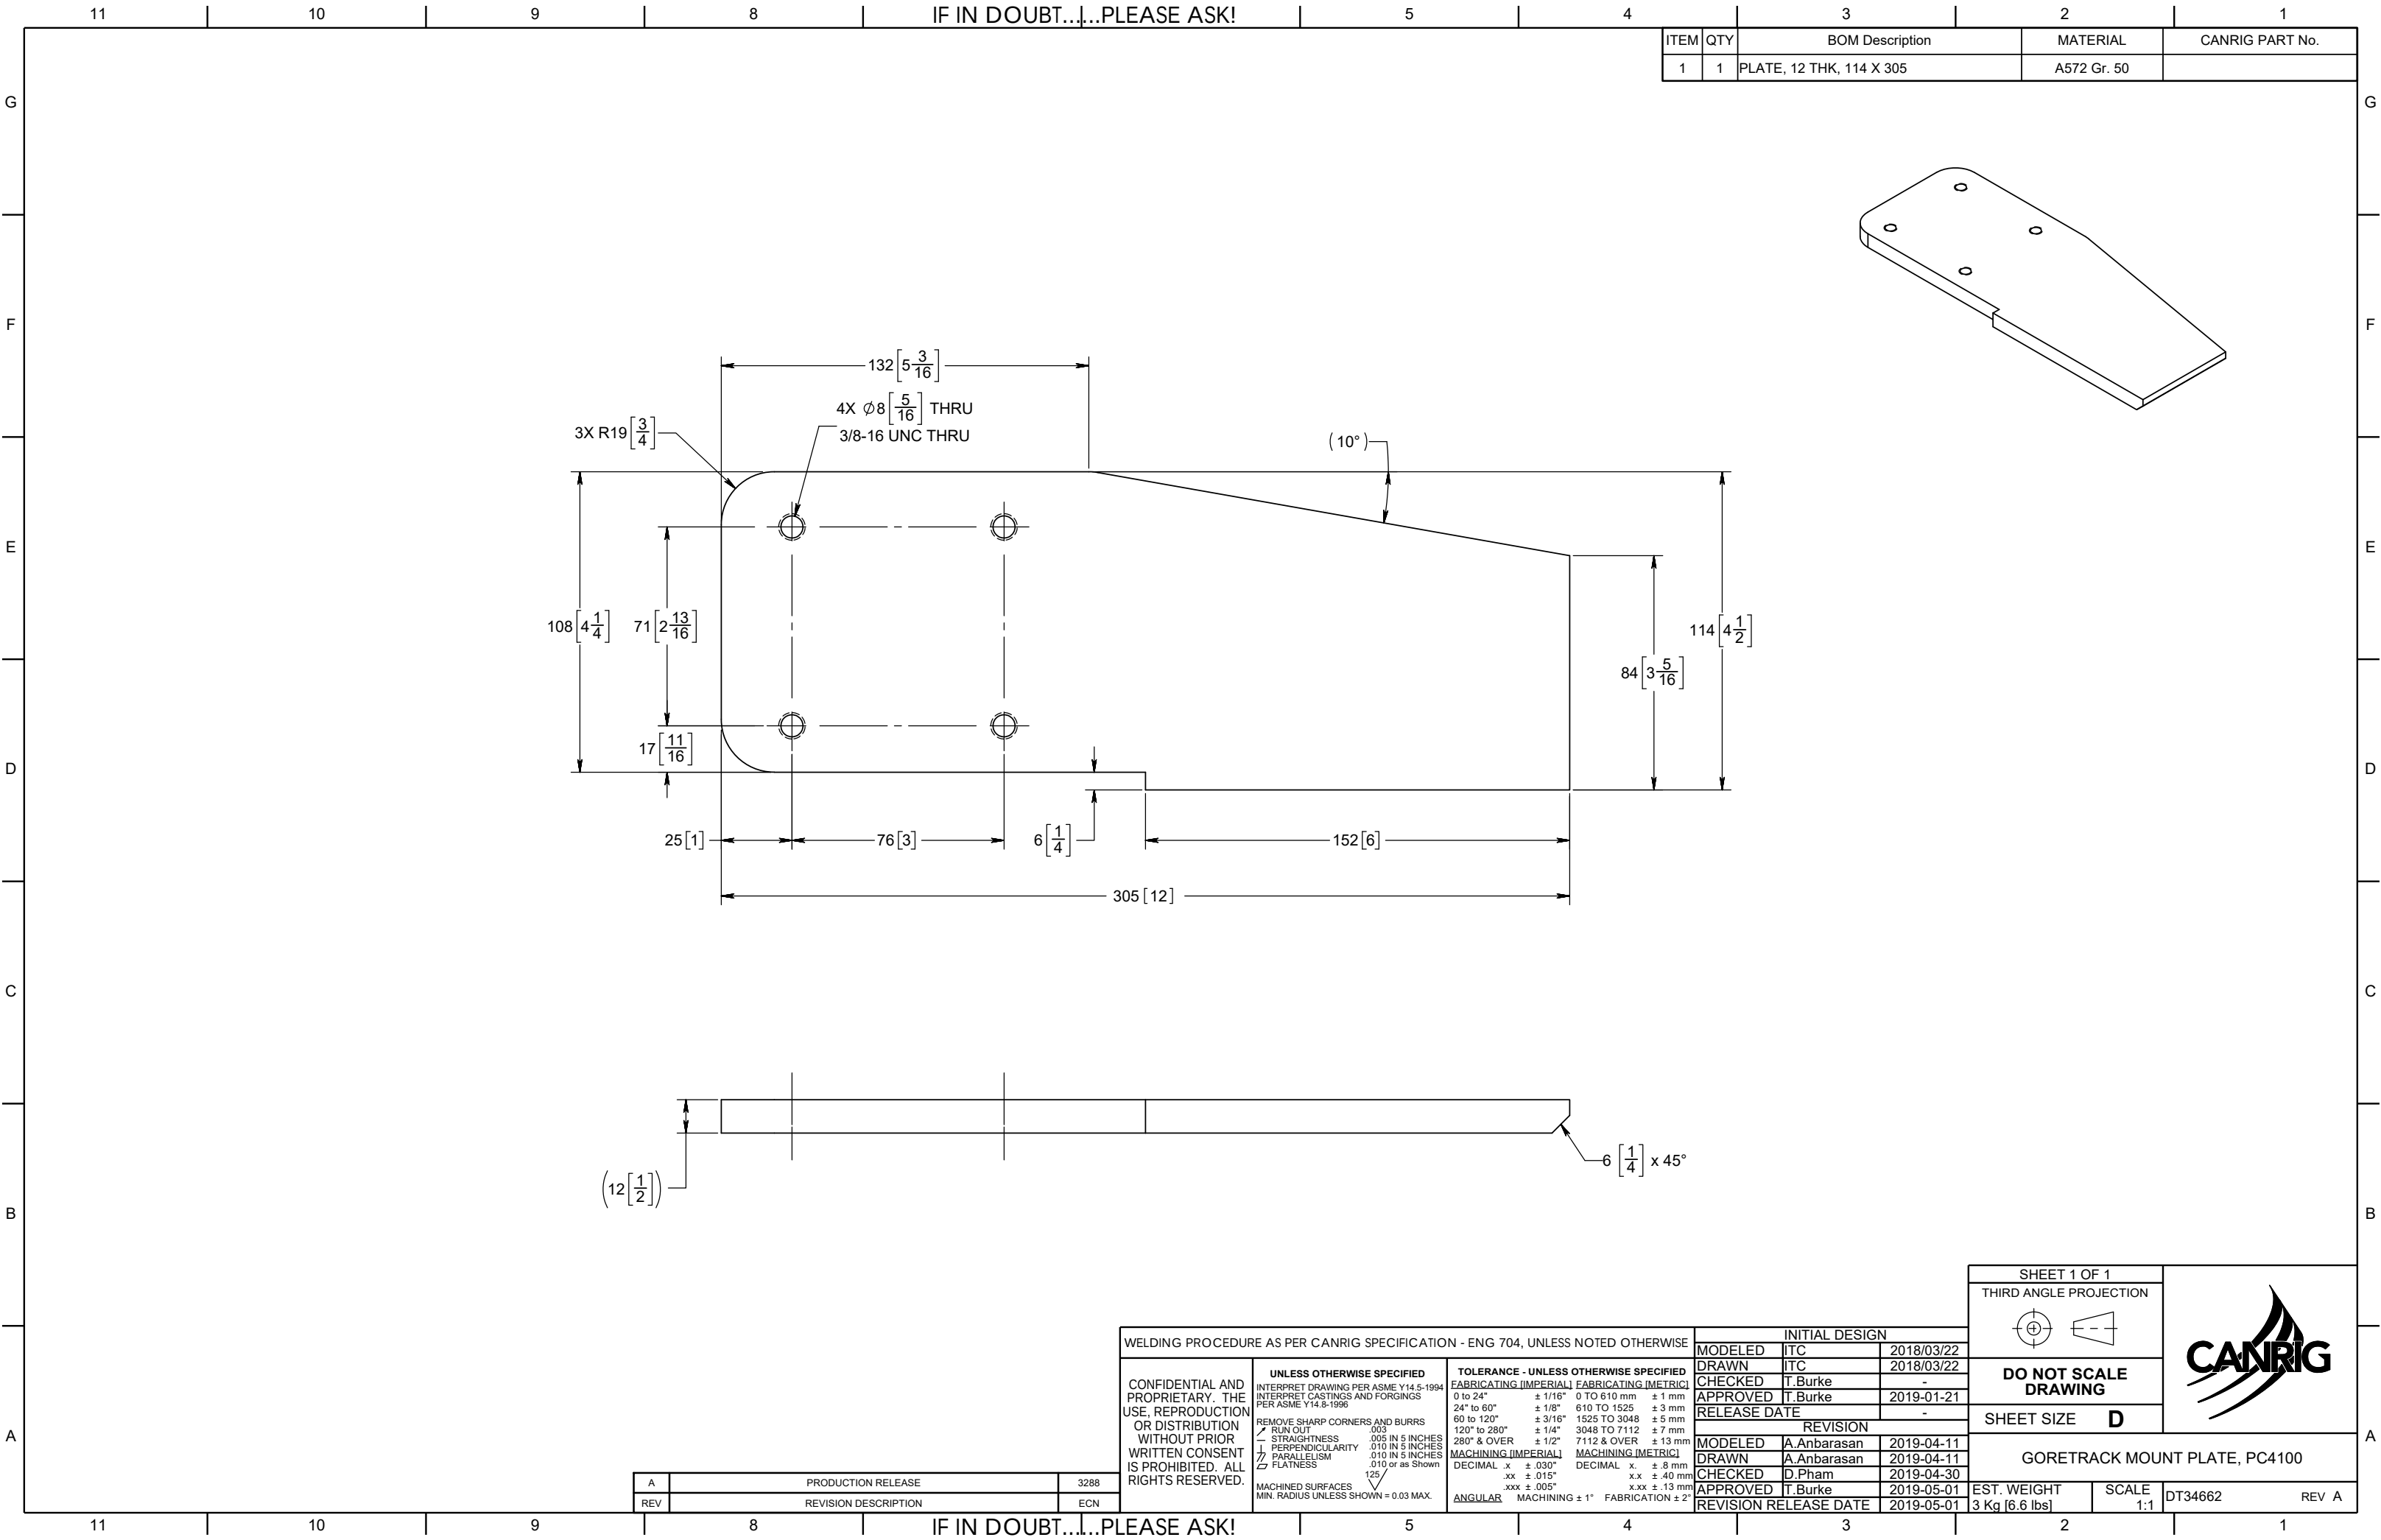


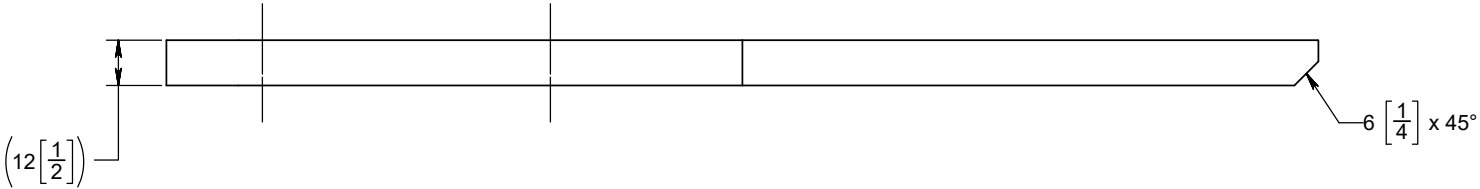

ITEM		QTY		BOM Description		MATERIAL		CANRIG PART No.	
1		1		PLATE, 12 THK, 114 X 305		A572 Gr. 50			

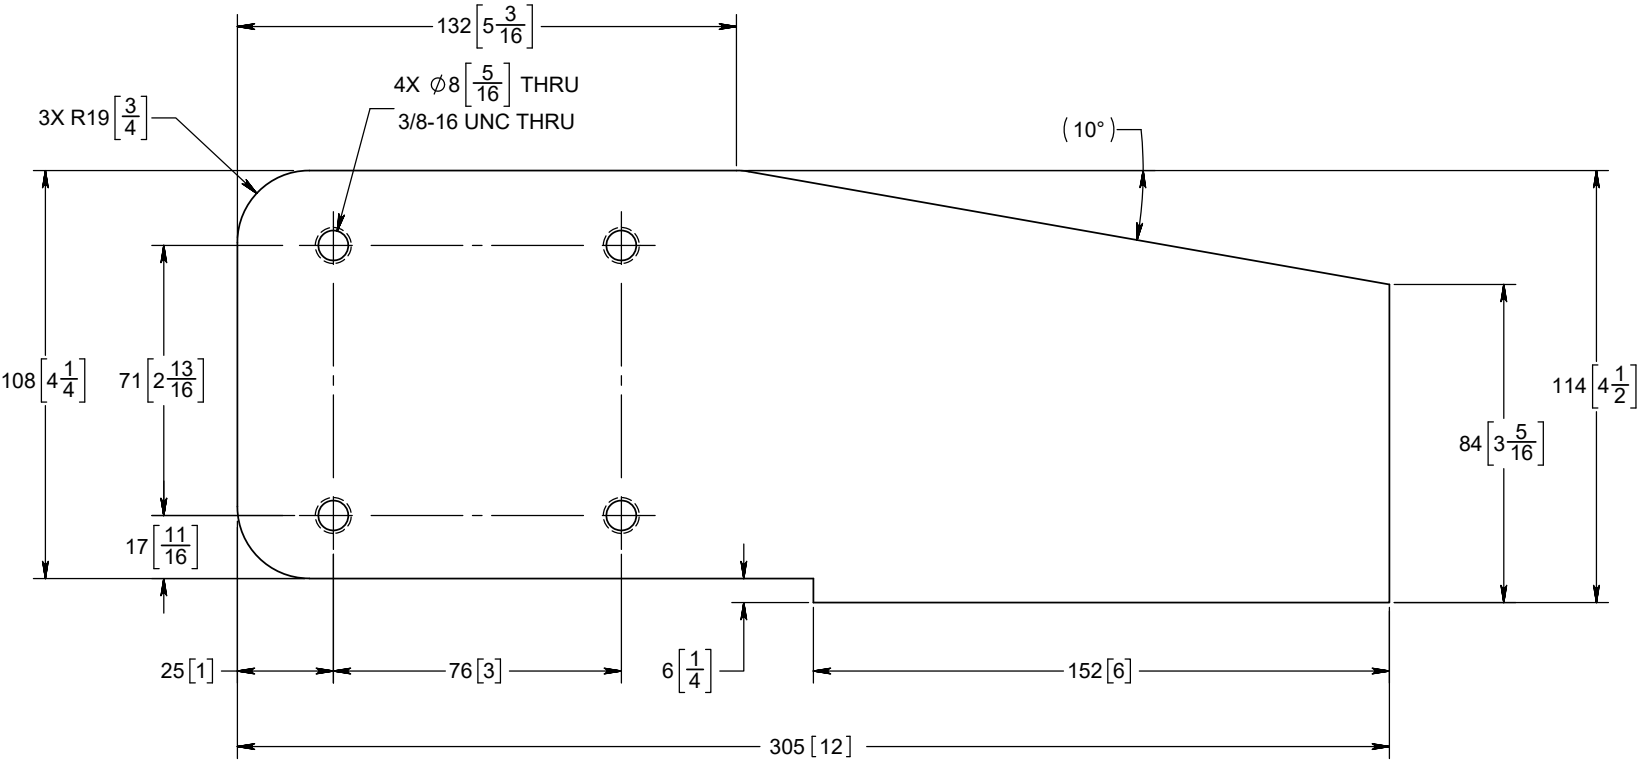

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN								
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.				MODELED	ITC	2018/03/22	DO NOT SCALE DRAWING					
				DRAWN	ITC	2018/03/22						
				CHECKED	T.Burke	-						
				APPROVED	T.Burke	2019-01-21						
				UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-1994 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996				RELEASE DATE			-	SHEET SIZE D
REVISION												
MODELED	A.Anbarasan	2019-04-11	GORETRACK MOUNT PLATE, PC4100									
DRAWN	A.Anbarasan	2019-04-11										
CHECKED	D.Pham	2019-04-30										
APPROVED	T.Burke	2019-05-01			EST. WEIGHT	SCALE	DT34662	REV A				
REMOVE SHARP CORNERS AND BURRS RUN OUT .003 STRAIGHTNESS .005 IN 5 INCHES PERPENDICULARITY .010 IN 5 INCHES PARALLELISM .010 IN 5 INCHES FLATNESS .010 or as Shown 125/V MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.				REVISION RELEASE DATE			2019-05-01	3 Kg [6.6 lbs]	1:1			
				TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING [IMPERIAL] FABRICATING [METRIC] 0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL .x ± .030" DECIMAL .x ± .8 mm .xx ± .015" .xx ± .40 mm .xxx ± .005" .xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°								