


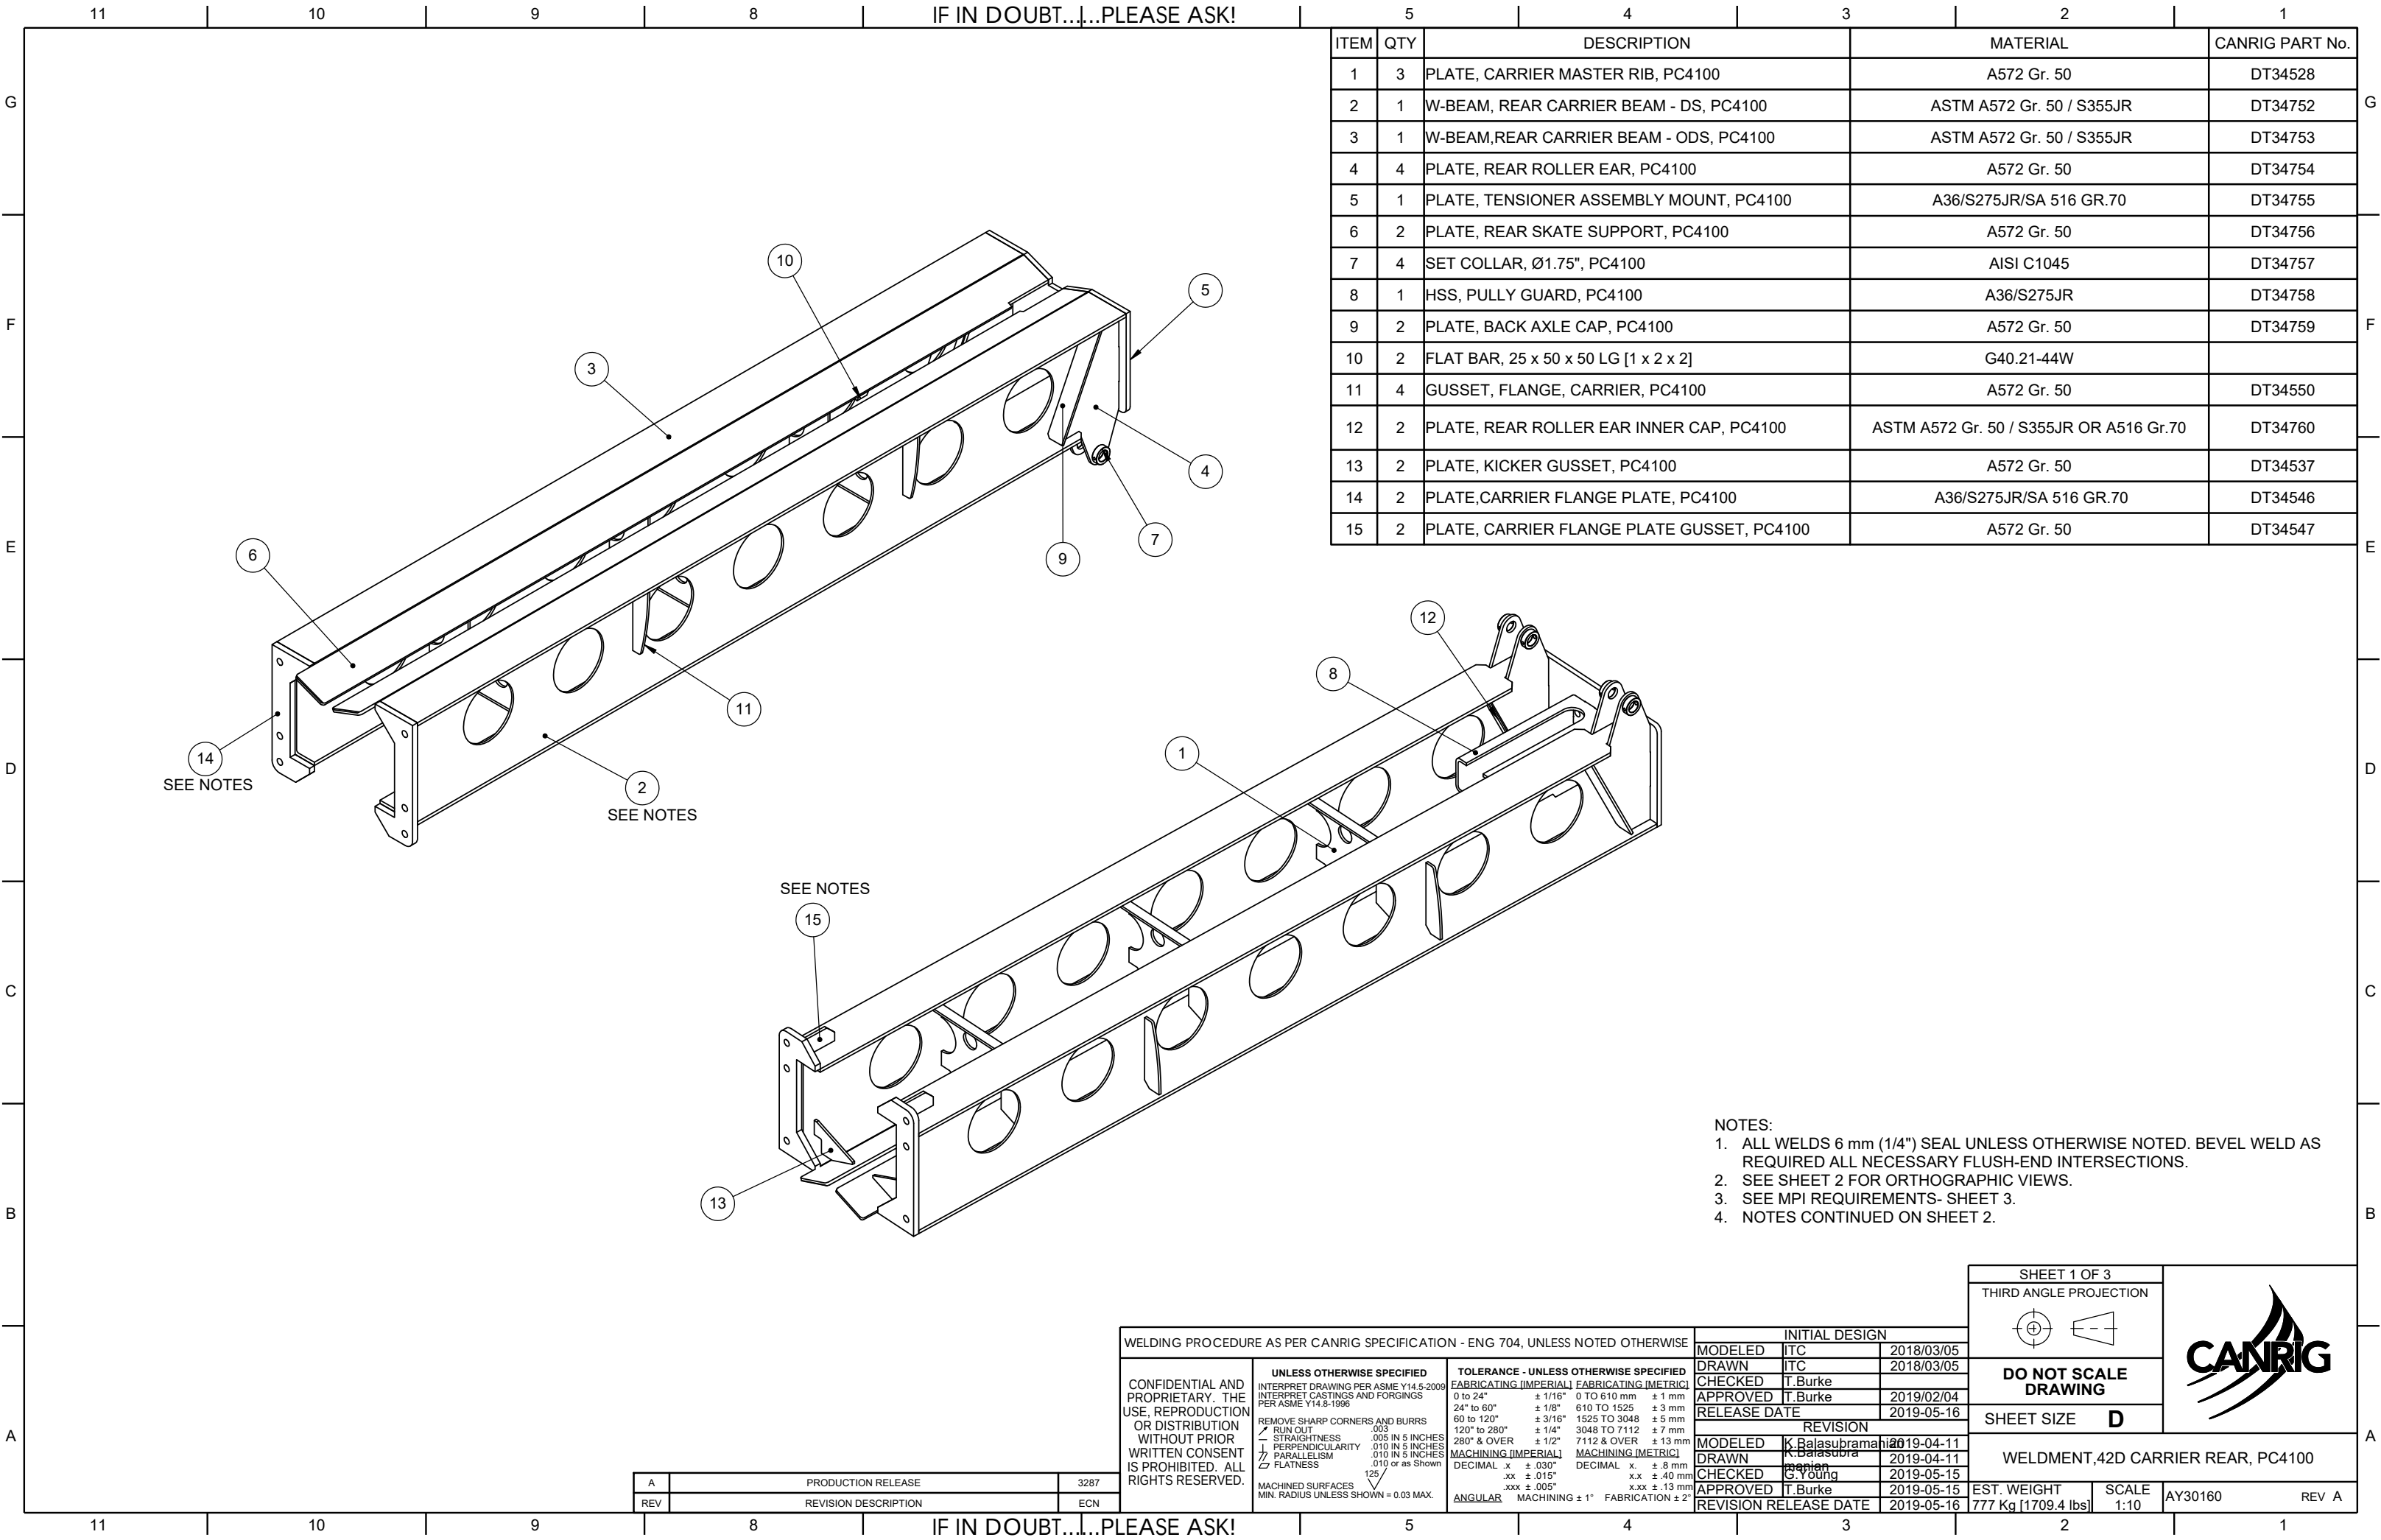

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	3	PLATE, CARRIER MASTER RIB, PC4100	A572 Gr. 50	DT34528
2	1	W-BEAM, REAR CARRIER BEAM - DS, PC4100	ASTM A572 Gr. 50 / S355JR	DT34752
3	1	W-BEAM,REAR CARRIER BEAM - ODS, PC4100	ASTM A572 Gr. 50 / S355JR	DT34753
4	4	PLATE, REAR ROLLER EAR, PC4100	A572 Gr. 50	DT34754
5	1	PLATE, TENSIONER ASSEMBLY MOUNT, PC4100	A36/S275JR/SA 516 GR.70	DT34755
6	2	PLATE, REAR SKATE SUPPORT, PC4100	A572 Gr. 50	DT34756
7	4	SET COLLAR, Ø1.75", PC4100	AISI C1045	DT34757
8	1	HSS, PULLY GUARD, PC4100	A36/S275JR	DT34758
9	2	PLATE, BACK AXLE CAP, PC4100	A572 Gr. 50	DT34759
10	2	FLAT BAR, 25 x 50 x 50 LG [1 x 2 x 2]	G40.21-44W	
11	4	GUSSET, FLANGE, CARRIER, PC4100	A572 Gr. 50	DT34550
12	2	PLATE, REAR ROLLER EAR INNER CAP, PC4100	ASTM A572 Gr. 50 / S355JR OR A516 Gr.70	DT34760
13	2	PLATE, KICKER GUSSET, PC4100	A572 Gr. 50	DT34537
14	2	PLATE,CARRIER FLANGE PLATE, PC4100	A36/S275JR/SA 516 GR.70	DT34546
15	2	PLATE, CARRIER FLANGE PLATE GUSSET, PC4100	A572 Gr. 50	DT34547

- NOTES:
1. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.
 2. SEE SHEET 2 FOR ORTHOGRAPHIC VIEWS.
 3. SEE MPI REQUIREMENTS- SHEET 3.
 4. NOTES CONTINUED ON SHEET 2.

A	PRODUCTION RELEASE	3287
REV	REVISION DESCRIPTION	ECN

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

UNLESS OTHERWISE SPECIFIED

INTERPRET DRAWING PER ASME Y14.5-2009
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996

REMOVE SHARP CORNERS AND BURRS
RUN OUT .003
STRAIGHTNESS .005 IN 5 INCHES
PERPENDICULARITY .010 IN 5 INCHES
PARALLELISM .010 IN 5 INCHES
FLATNESS .010 or as Shown
125

MACHINED SURFACES
MIN. RADIUS UNLESS SHOWN = 0.03 MAX.

TOLERANCE - UNLESS OTHERWISE SPECIFIED

FABRICATING [IMPERIAL]

FABRICATING [METRIC]

0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm

24" to 60" ± 1/8" 610 TO 1525 ± 3 mm

60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm

120 to 280" ± 1/4" 3048 TO 7112 ± 7 mm

280" & OVER ± 1/2" 7112 & OVER ± 13 mm

MACHINING [IMPERIAL]

MACHINING [METRIC]

DECIMAL .x ± .030" DECIMAL .x ± .8 mm

.xx ± .015" .xx ± .40 mm

.xxx ± .005" .xxx ± .13 mm

ANGULAR MACHINING ± 1° FABRICATION ± 2°

INITIAL DESIGN

MODELED	ITC	2018/03/05
DRAWN	ITC	2018/03/05
CHECKED	T.Burke	
APPROVED	T.Burke	2019/02/04
RELEASE DATE		2019-05-16

REVISION

MODELED	K.Balasubramanian	2019-04-11
DRAWN	K.Balasubramanian	2019-04-11
CHECKED	G.Young	2019-05-15
APPROVED	T.Burke	2019-05-15
REVISION RELEASE DATE		2019-05-16

SHEET 1 OF 3

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

SHEET SIZE D

WELDMENT,42D CARRIER REAR, PC4100

EST. WEIGHT


777 Kg [1709.4 lbs]

SCALE

1:10

AY30160

REV A

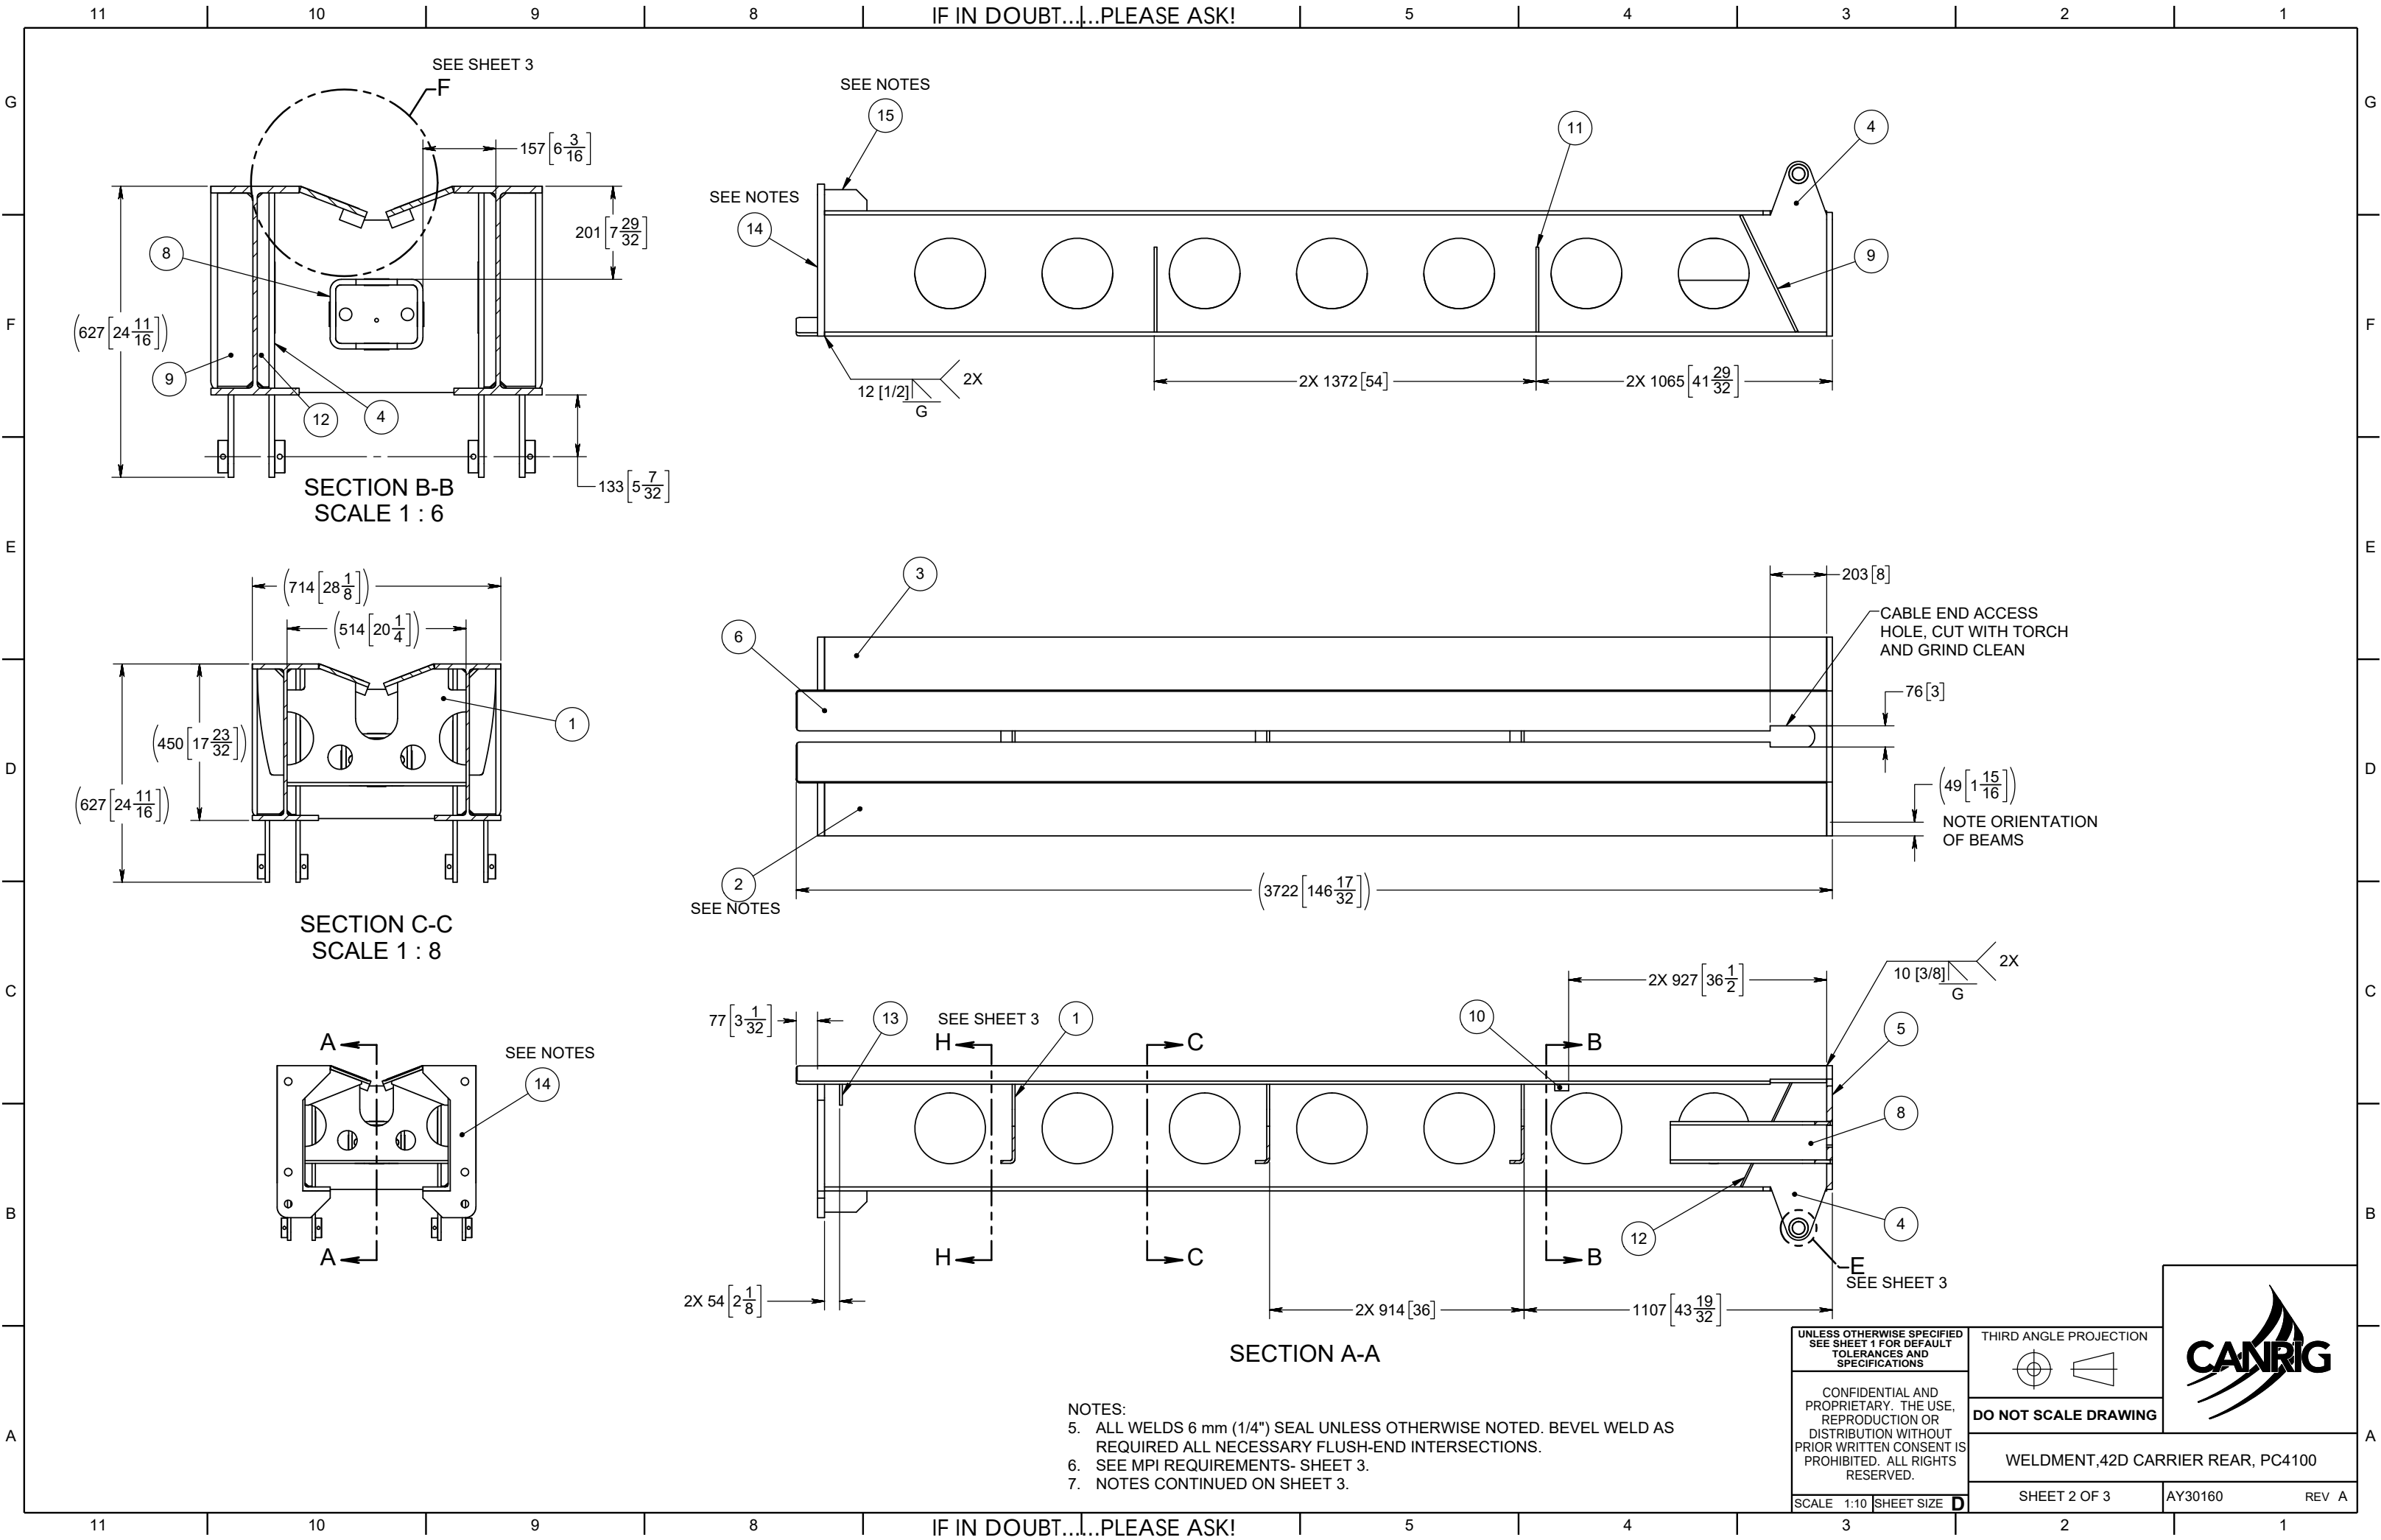

G

G

F

F

E

E

D

D

C


C

B


B

A


A

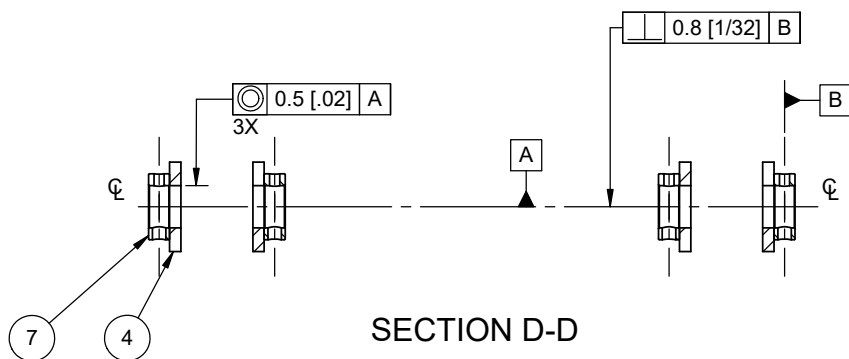



SECTION D-D

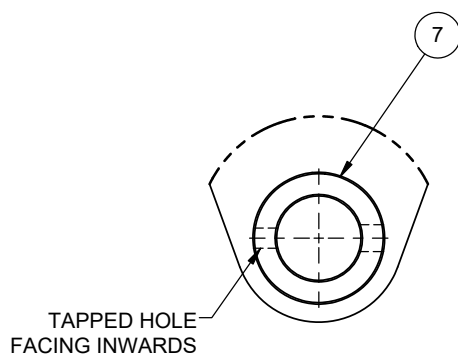


DETAIL E
SCALE 1 : 2

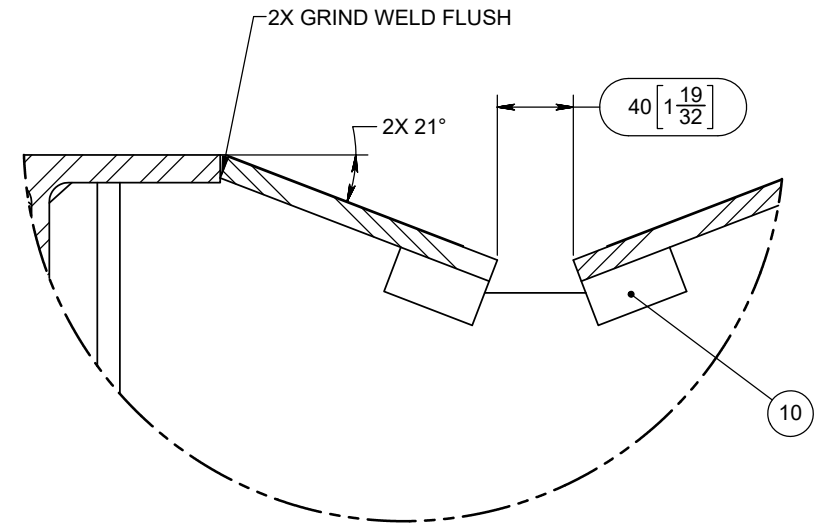

DETAIL F
SCALE 1 : 2

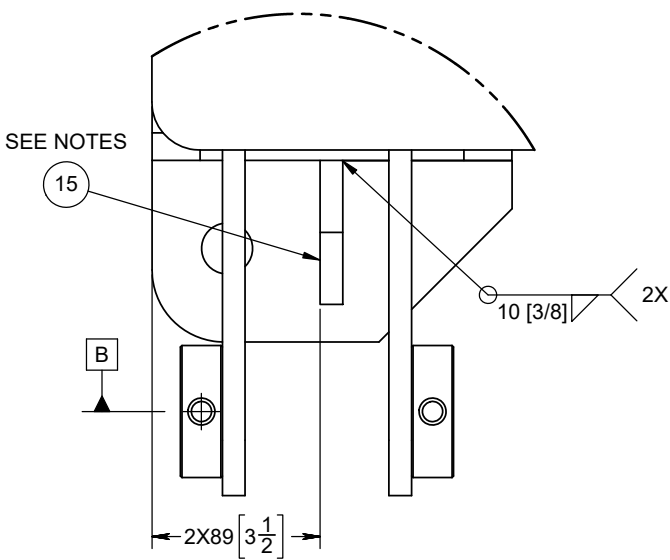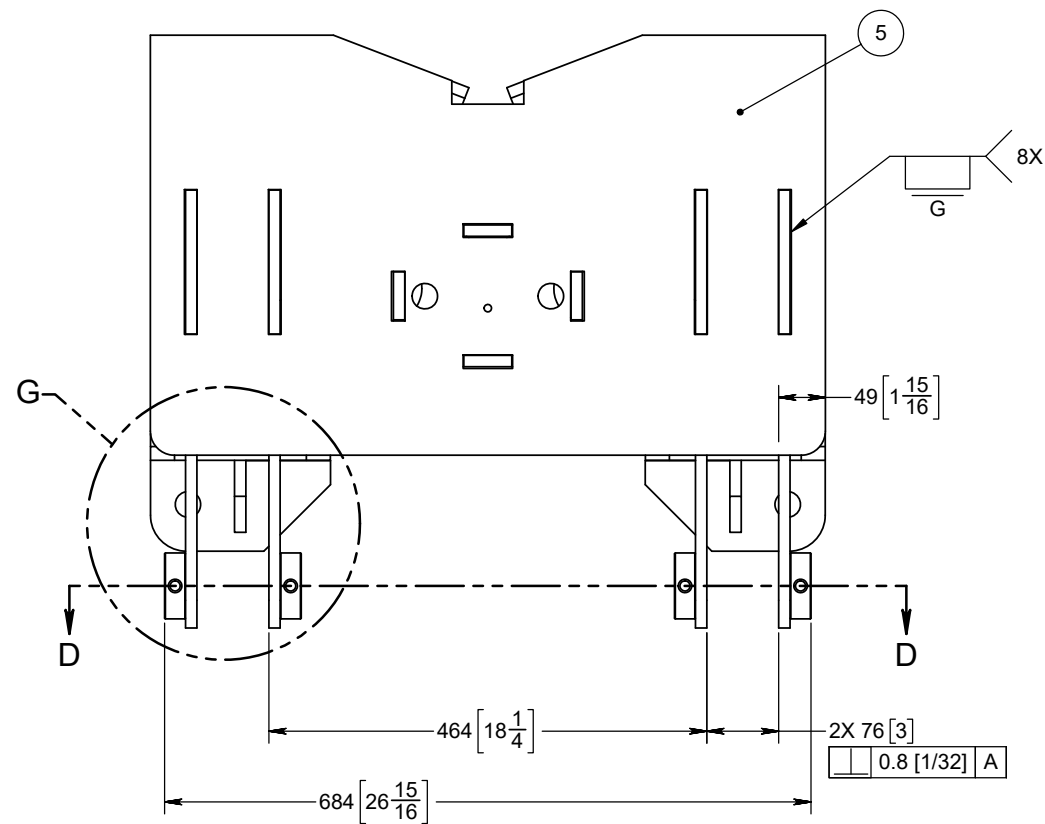

DETAIL G
SCALE 1 : 2

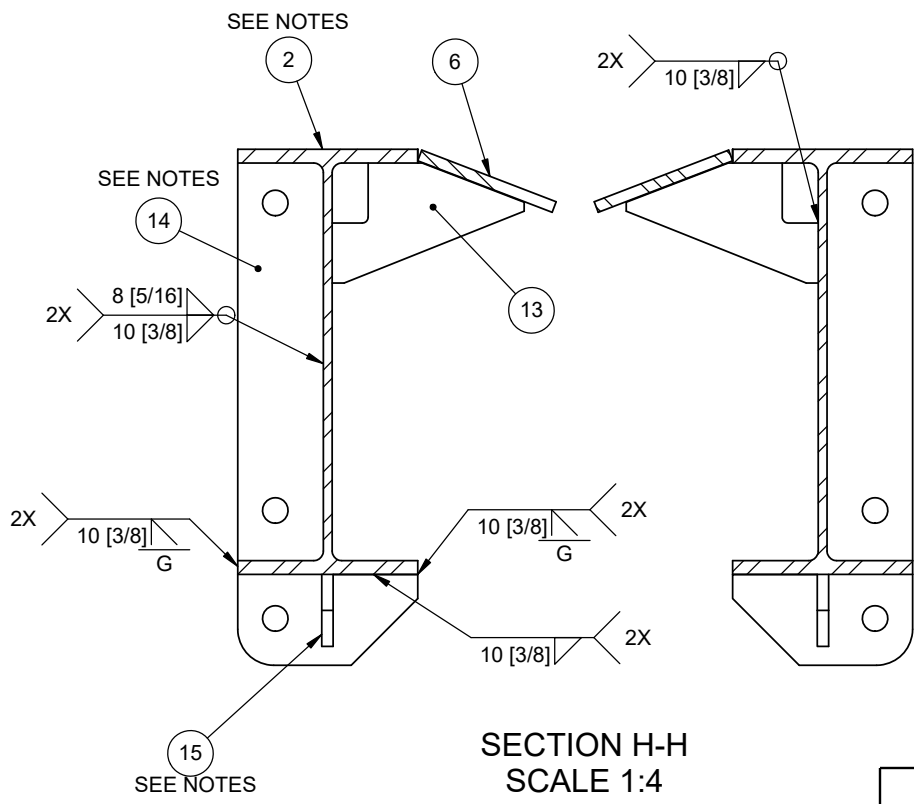

SECTION H-H
SCALE 1:4

MPI INSPECTION CHART				
LINE #	DESCRIPTION	INSPECTION TYPE	% OF WELD INSPECTED	APPROVAL MARK
1	ALL WELDS JOINING ITEMS 14 & 15	MPI	100	
2	ALL WELDS JOINING ITEMS 14 & 2	MPI	100	
3	ALL WELDS JOINING ITEMS 15 & 2	MPI	100	

NOTES:
8. ALL WELDS 6 mm (1/4") SEAL UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS.

UNLESS OTHERWISE SPECIFIED
SEE SHEET 1 FOR DEFAULT
TOLERANCES AND
SPECIFICATIONS

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

CONFIDENTIAL AND
PROPRIETARY. THE USE,
REPRODUCTION OR
DISTRIBUTION WITHOUT
PRIOR WRITTEN CONSENT IS
PROHIBITED. ALL RIGHTS
RESERVED.

SCALE 1:4 SHEET SIZE D

WELDMENT,42D CARRIER REAR, PC4100
SHEET 3 OF 3
AY30160
REV A