


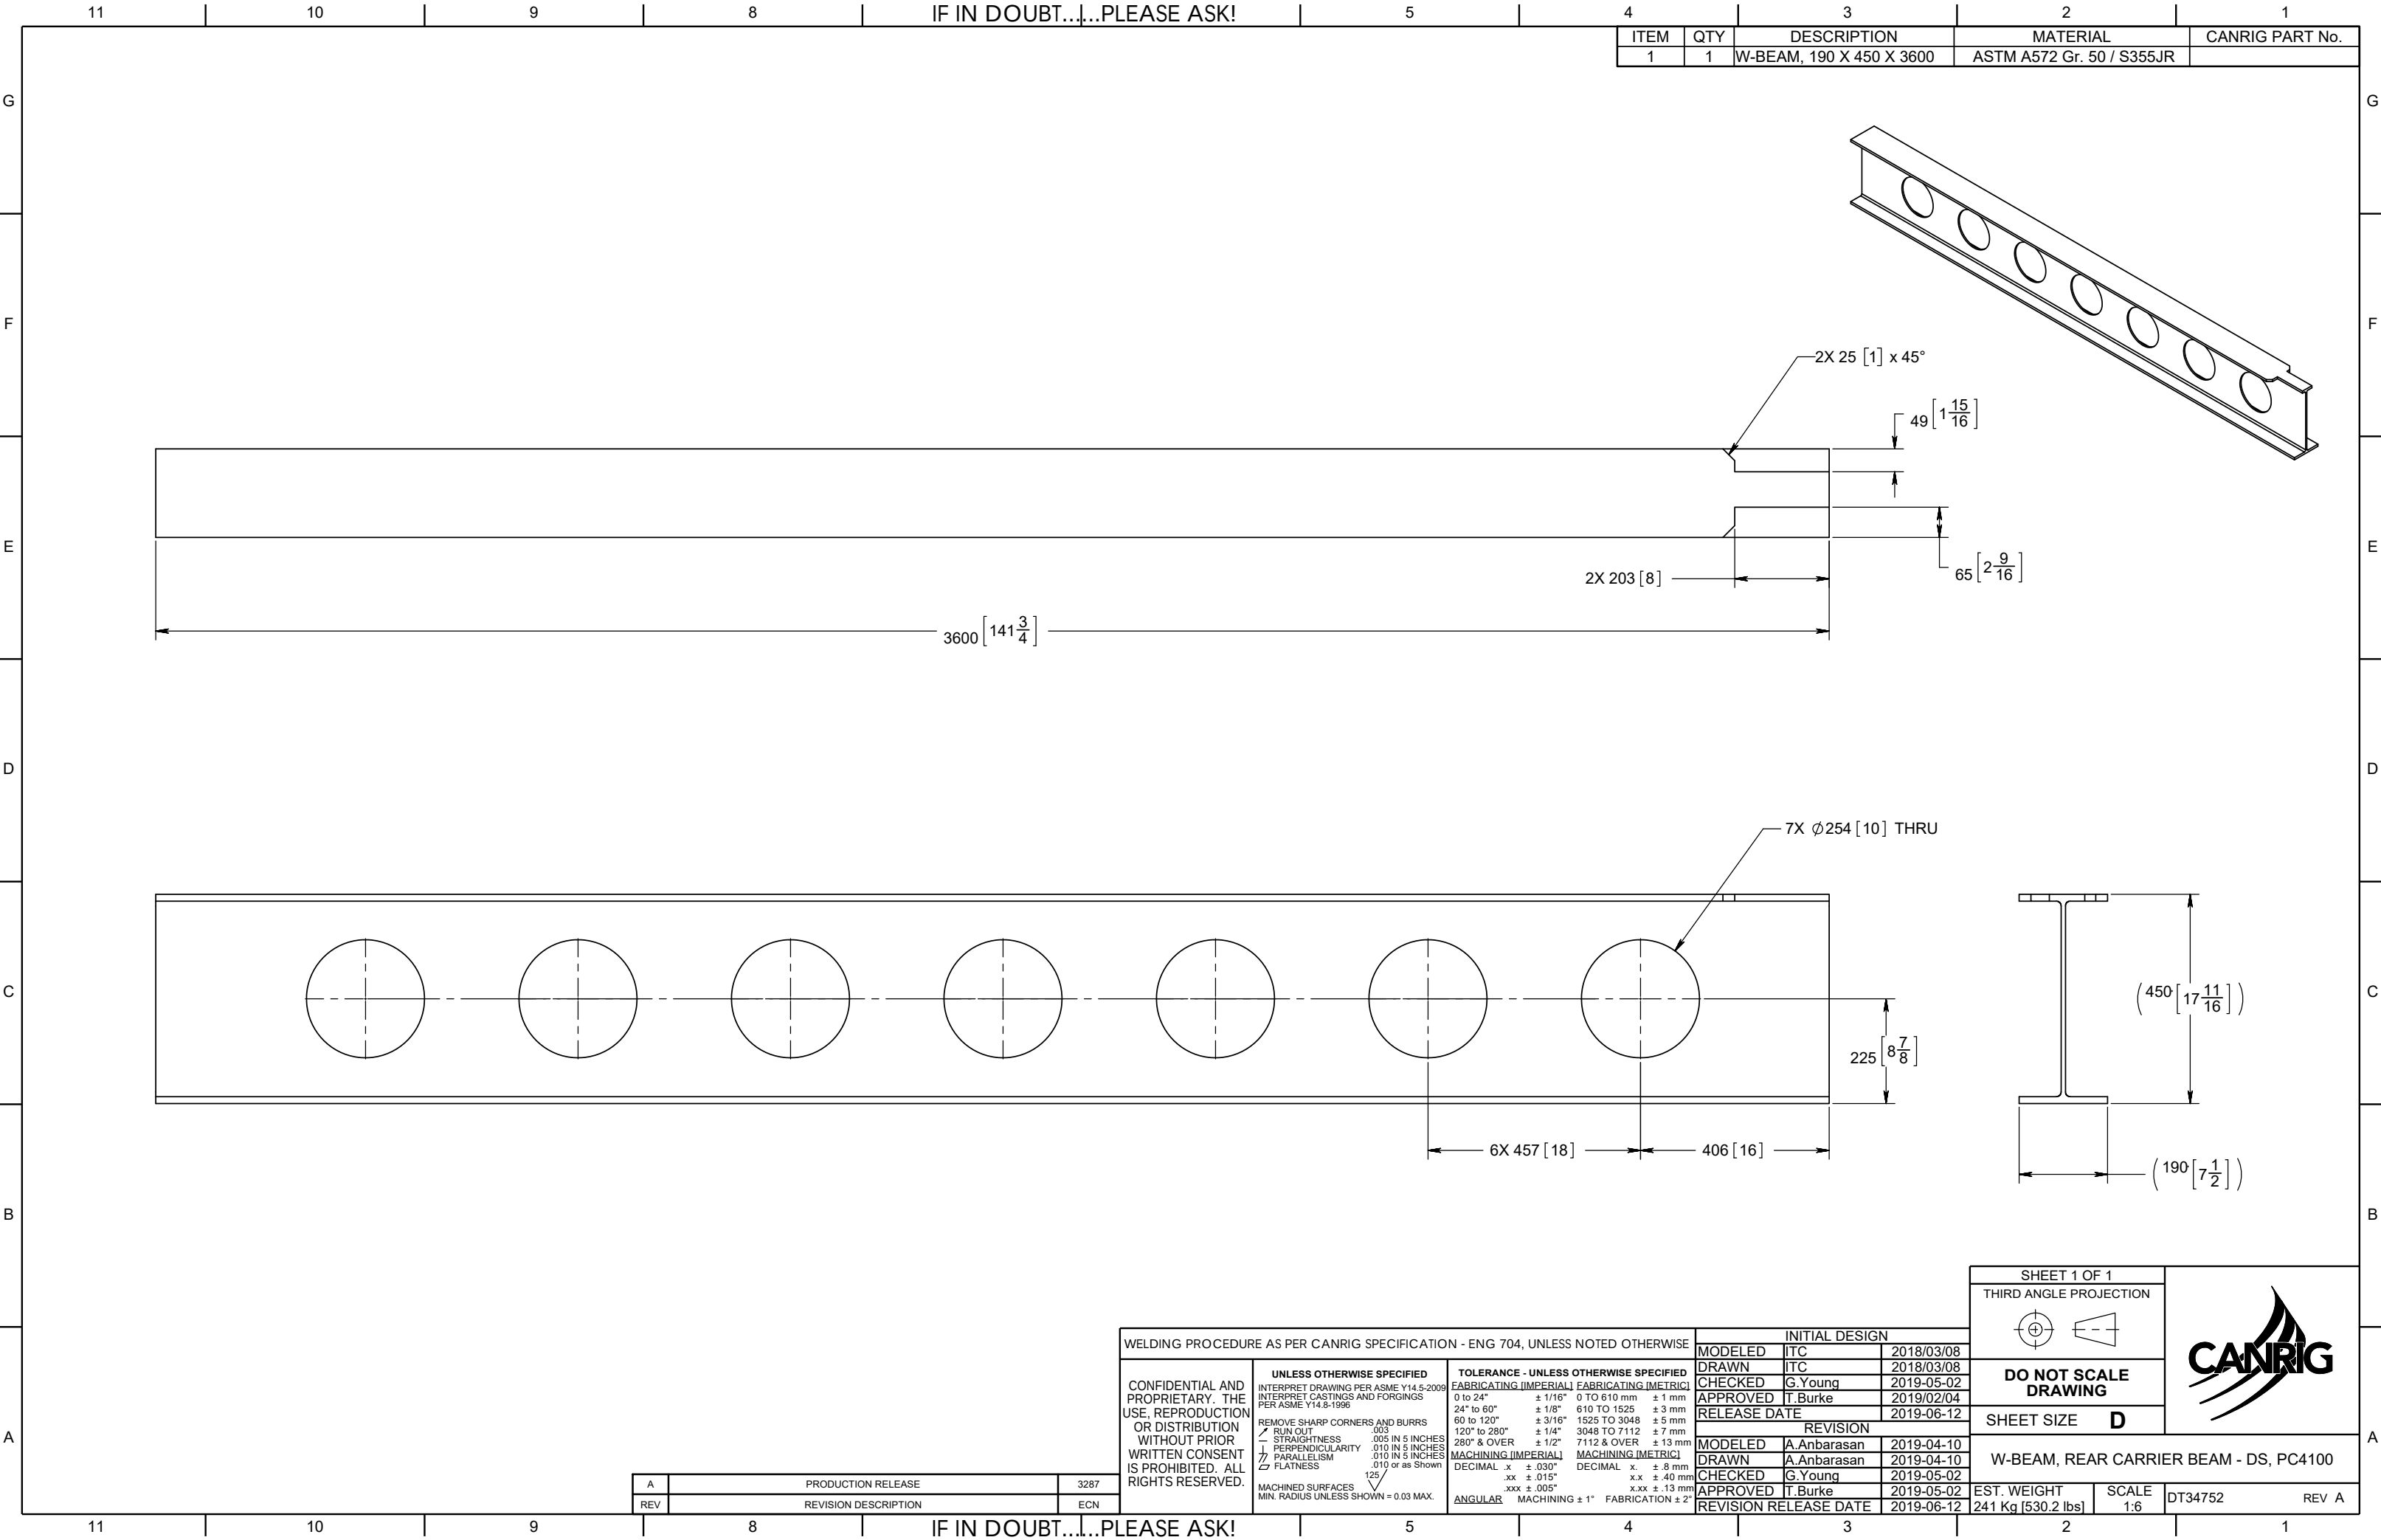

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	W-BEAM, 190 X 450 X 3600	ASTM A572 Gr. 50 / S355JR	

2X 203 [8]

3600 $\left[141\frac{3}{4}\right]$

2X 25 [1] x 45°

49 $\left[1\frac{15}{16}\right]$

65 $\left[2\frac{9}{16}\right]$

7X Ø254 [10] THRU


225 $\left[8\frac{7}{8}\right]$

6X 457 [18]

406 [16]

$\left(450\left[17\frac{11}{16}\right]\right)$

$\left(190\left[7\frac{1}{2}\right]\right)$

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE				INITIAL DESIGN					
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-2009 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996 REMOVE SHARP CORNERS AND BURRS / RUN OUT .003 — STRAIGHTNESS .005 IN 5 INCHES ⊥ PERPENDICULARITY .010 IN 5 INCHES // PARALLELISM .010 IN 5 INCHES ⌢ FLATNESS .010 or as Shown 125 MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.	TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING [IMPERIAL] FABRICATING [METRIC] 0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL .x ± .030" DECIMAL .x ± .8 mm .xx ± .015" .xx ± .40 mm .xxx ± .005" .xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°	MODELED	ITC	2018/03/08	DO NOT SCALE DRAWING			
			DRAWN	ITC	2018/03/08				
			CHECKED	G.Young	2019-05-02	SHEET SIZE D			
			APPROVED	T.Burke	2019/02/04				
			RELEASE DATE		2019-06-12				
REVISION						W-BEAM, REAR CARRIER BEAM - DS, PC4100			
MODELED	A.Anbarasan	2019-04-10							
DRAWN	A.Anbarasan	2019-04-10							
CHECKED	G.Young	2019-05-02							
APPROVED	T.Burke	2019-05-02							
REVISION RELEASE DATE			2019-06-12			EST. WEIGHT	SCALE	DT34752	REV A
						241 Kg [530.2 lbs]	1:6		

A	PRODUCTION RELEASE	3287
REV	REVISION DESCRIPTION	ECN