


IF IN DOUBT.....PLEASE ASK!

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	CHANNEL, UPN80 X 45 X 410 LG	A36/S275JR	

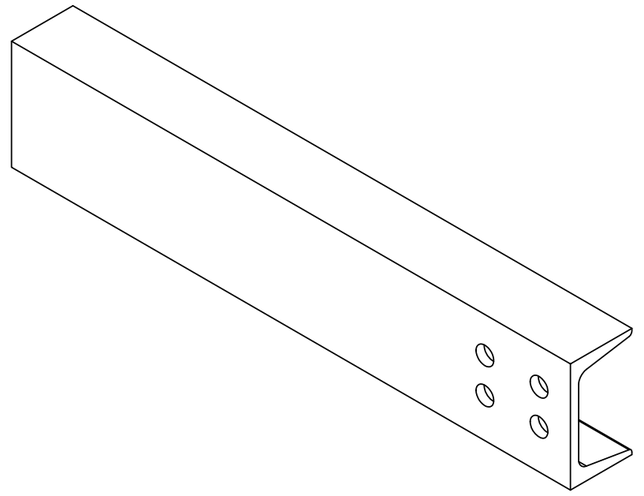

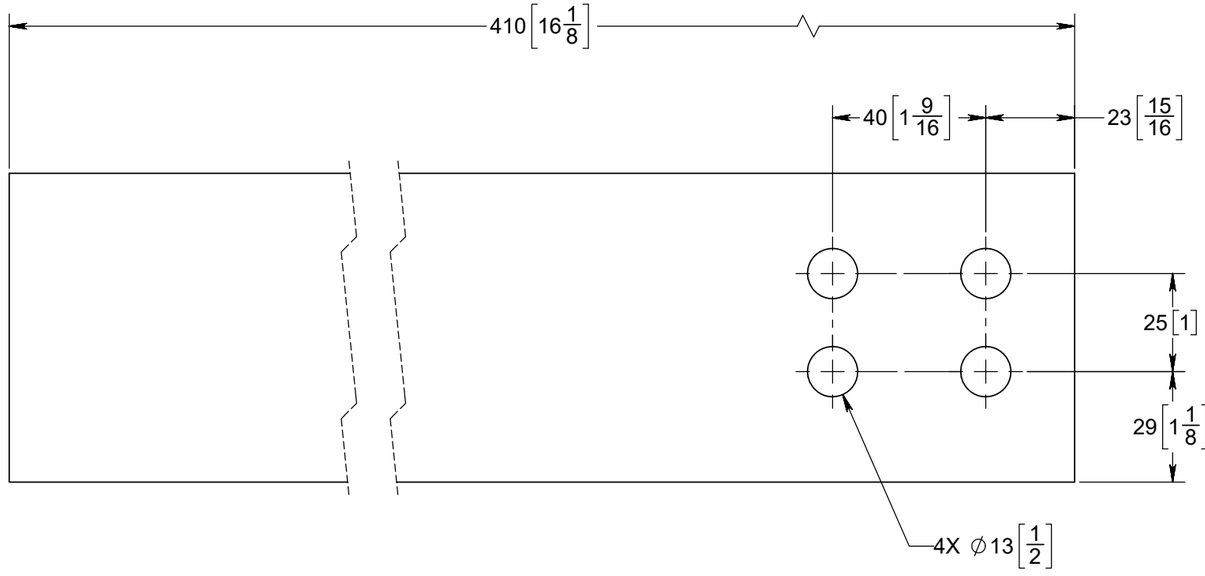

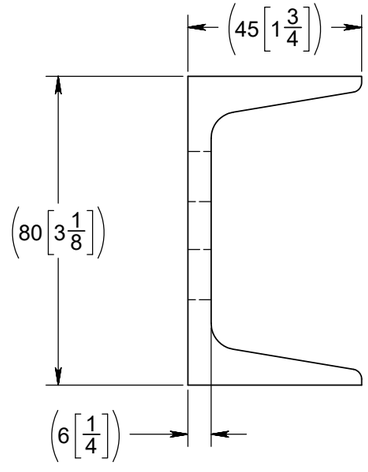

REV	REVISION DESCRIPTION	ECN
A	PRODUCTION RELEASE	

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE

UNLESS OTHERWISE SPECIFIED
INTERPRET DRAWING PER ASME Y14.5-1994
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996

REMOVE SHARP CORNERS AND BURRS

↗	RUN OUT	.003
—	STRAIGHTNESS	.005 IN 5 INCHES
⊥	PERPENDICULARITY	.010 IN 5 INCHES
//	PARALLELISM	.010 IN 5 INCHES
▱	FLATNESS	.010 or as Shown

MACHINED SURFACES 125
MIN. RADIUS UNLESS SHOWN = 0.03 MAX.

TOLERANCE - UNLESS OTHERWISE SPECIFIED

FABRICATING [IMPERIAL]		FABRICATING [METRIC]	
0 to 24"	± 1/16"	0 TO 610 mm	± 1 mm
24" to 60"	± 1/8"	610 TO 1525	± 3 mm
60 to 120"	± 3/16"	1525 TO 3048	± 5 mm
120" to 280"	± 1/4"	3048 TO 7112	± 7 mm
280" & OVER	± 1/2"	7112 & OVER	± 13 mm
MACHINING [IMPERIAL]		MACHINING [METRIC]	
DECIMAL .x	± .030"	DECIMAL x.	± .8 mm
.xx	± .015"	x.x	± .40 mm
.xxx	± .005"	x.xx	± .13 mm
ANGULAR	MACHINING ± 1°	FABRICATION ± 2°	

INITIAL DESIGN		
MODELED	ITC	2017/12/26
DRAWN	ITC	2017/12/26
CHECKED	T.Burke	
APPROVED		
RELEASE DATE		2019-09-04
REVISION		
MODELED	K.Bala	2019-08-28
DRAWN	K.Bala	2019-08-28
CHECKED	D.Pham	2019-09-03
APPROVED	T.Burke	2019-09-03
REVISION RELEASE DATE		2019-09-04

SHEET 1 OF 1
THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

SHEET SIZE **C**

CANRIG

CARRIER RAIL BOTTOM STIFFNER, DS, PC4100

EST. WEIGHT	SCALE	
3 Kg [6.6 lbs]	1:1	DT34405 REV A

IF IN DOUBT.....PLEASE ASK!