


| ITEM | QTY | BOM Description | MATERIAL | CANRIG PART No. |
|---|---|---|---|---|
| 1 | 1 | PLATE, 20 THK, 152 X 738 | A36/S275JR/SA 516 GR.70 | |

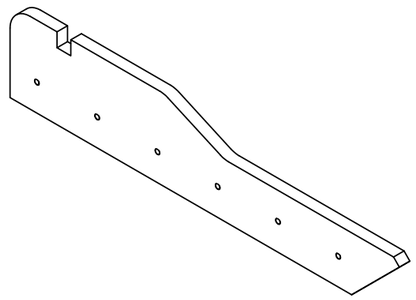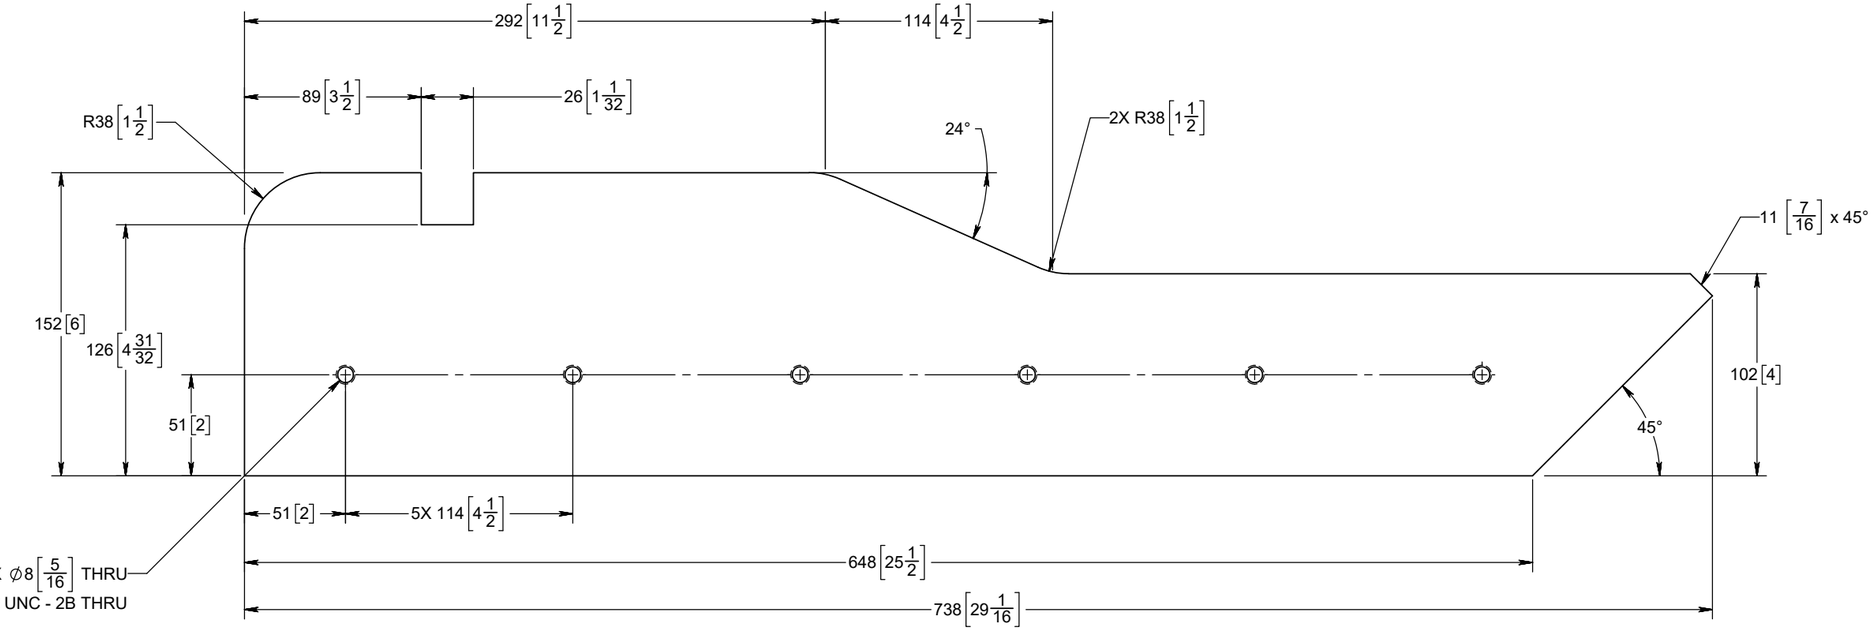

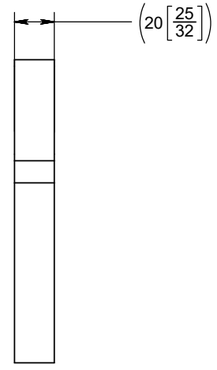


| REV | REVISION DESCRIPTION | ECN |
|---|---|---|
| A | PRODUCTION RELEASE | 3287 |

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE

**UNLESS OTHERWISE SPECIFIED**
INTERPRET DRAWING PER ASME Y14.5-2009
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996

REMOVE SHARP CORNERS AND BURRS

| | | |
|---|---|---|
| ↗ | RUN OUT | .003 |
| — | STRAIGHTNESS | .005 IN 5 INCHES |
| ⊥ | PERPENDICULARITY | .010 IN 5 INCHES |
| // | PARALLELISM | .010 IN 5 INCHES |
| ▱ | FLATNESS | .010 or as Shown |

125 MACHINED SURFACES
MIN. RADIUS UNLESS SHOWN = 0.03 MAX.

**TOLERANCE - UNLESS OTHERWISE SPECIFIED**

| FABRICATING [IMPERIAL] | | FABRICATING [METRIC] | |
|---|---|---|---|
| 0 to 24" | ± 1/16" | 0 TO 610 mm | ± 1 mm |
| 24" to 60" | ± 1/8" | 610 TO 1525 | ± 3 mm |
| 60 to 120" | ± 3/16" | 1525 TO 3048 | ± 5 mm |
| 120" to 280" | ± 1/4" | 3048 TO 7112 | ± 7 mm |
| 280" & OVER | ± 1/2" | 7112 & OVER | ± 13 mm |

| MACHINING [IMPERIAL] | | MACHINING [METRIC] | |
|---|---|---|---|
| DECIMAL .x | ± .030" | DECIMAL x. | ± .8 mm |
| .xx | ± .015" | x.x | ± .40 mm |
| .xxx | ± .005" | x.xx | ± .13 mm |
| ANGULAR | MACHINING ± 1° | FABRICATION ± 2° | |

| | | |
|---|---|---|
| INITIAL DESIGN | | |
| MODELED | ITC | 2018-03-07 |
| DRAWN | ITC | 2018-03-07 |
| CHECKED | G.Young | 2019-05-02 |
| APPROVED | T.Burke | 2019-02-01 |
| RELEASE DATE | | 2019-06-11 |
| REVISION | | |
| MODELED | A.Anbarasan | 2019-04-10 |
| DRAWN | A.Anbarasan | 2019-04-10 |
| CHECKED | G.Young | 2019-05-02 |
| APPROVED | T.Burke | 2019-05-02 |
| REVISION RELEASE DATE | | |

SHEET 1 OF 1
THIRD ANGLE PROJECTION

**DO NOT SCALE DRAWING**

SHEET SIZE **D**

CANRIG

SKID PAD MOUNT, PC4100

EST. WEIGHT 14 Kg [30.8 lbs] | SCALE 1:1.5 | DT34572 | REV A