

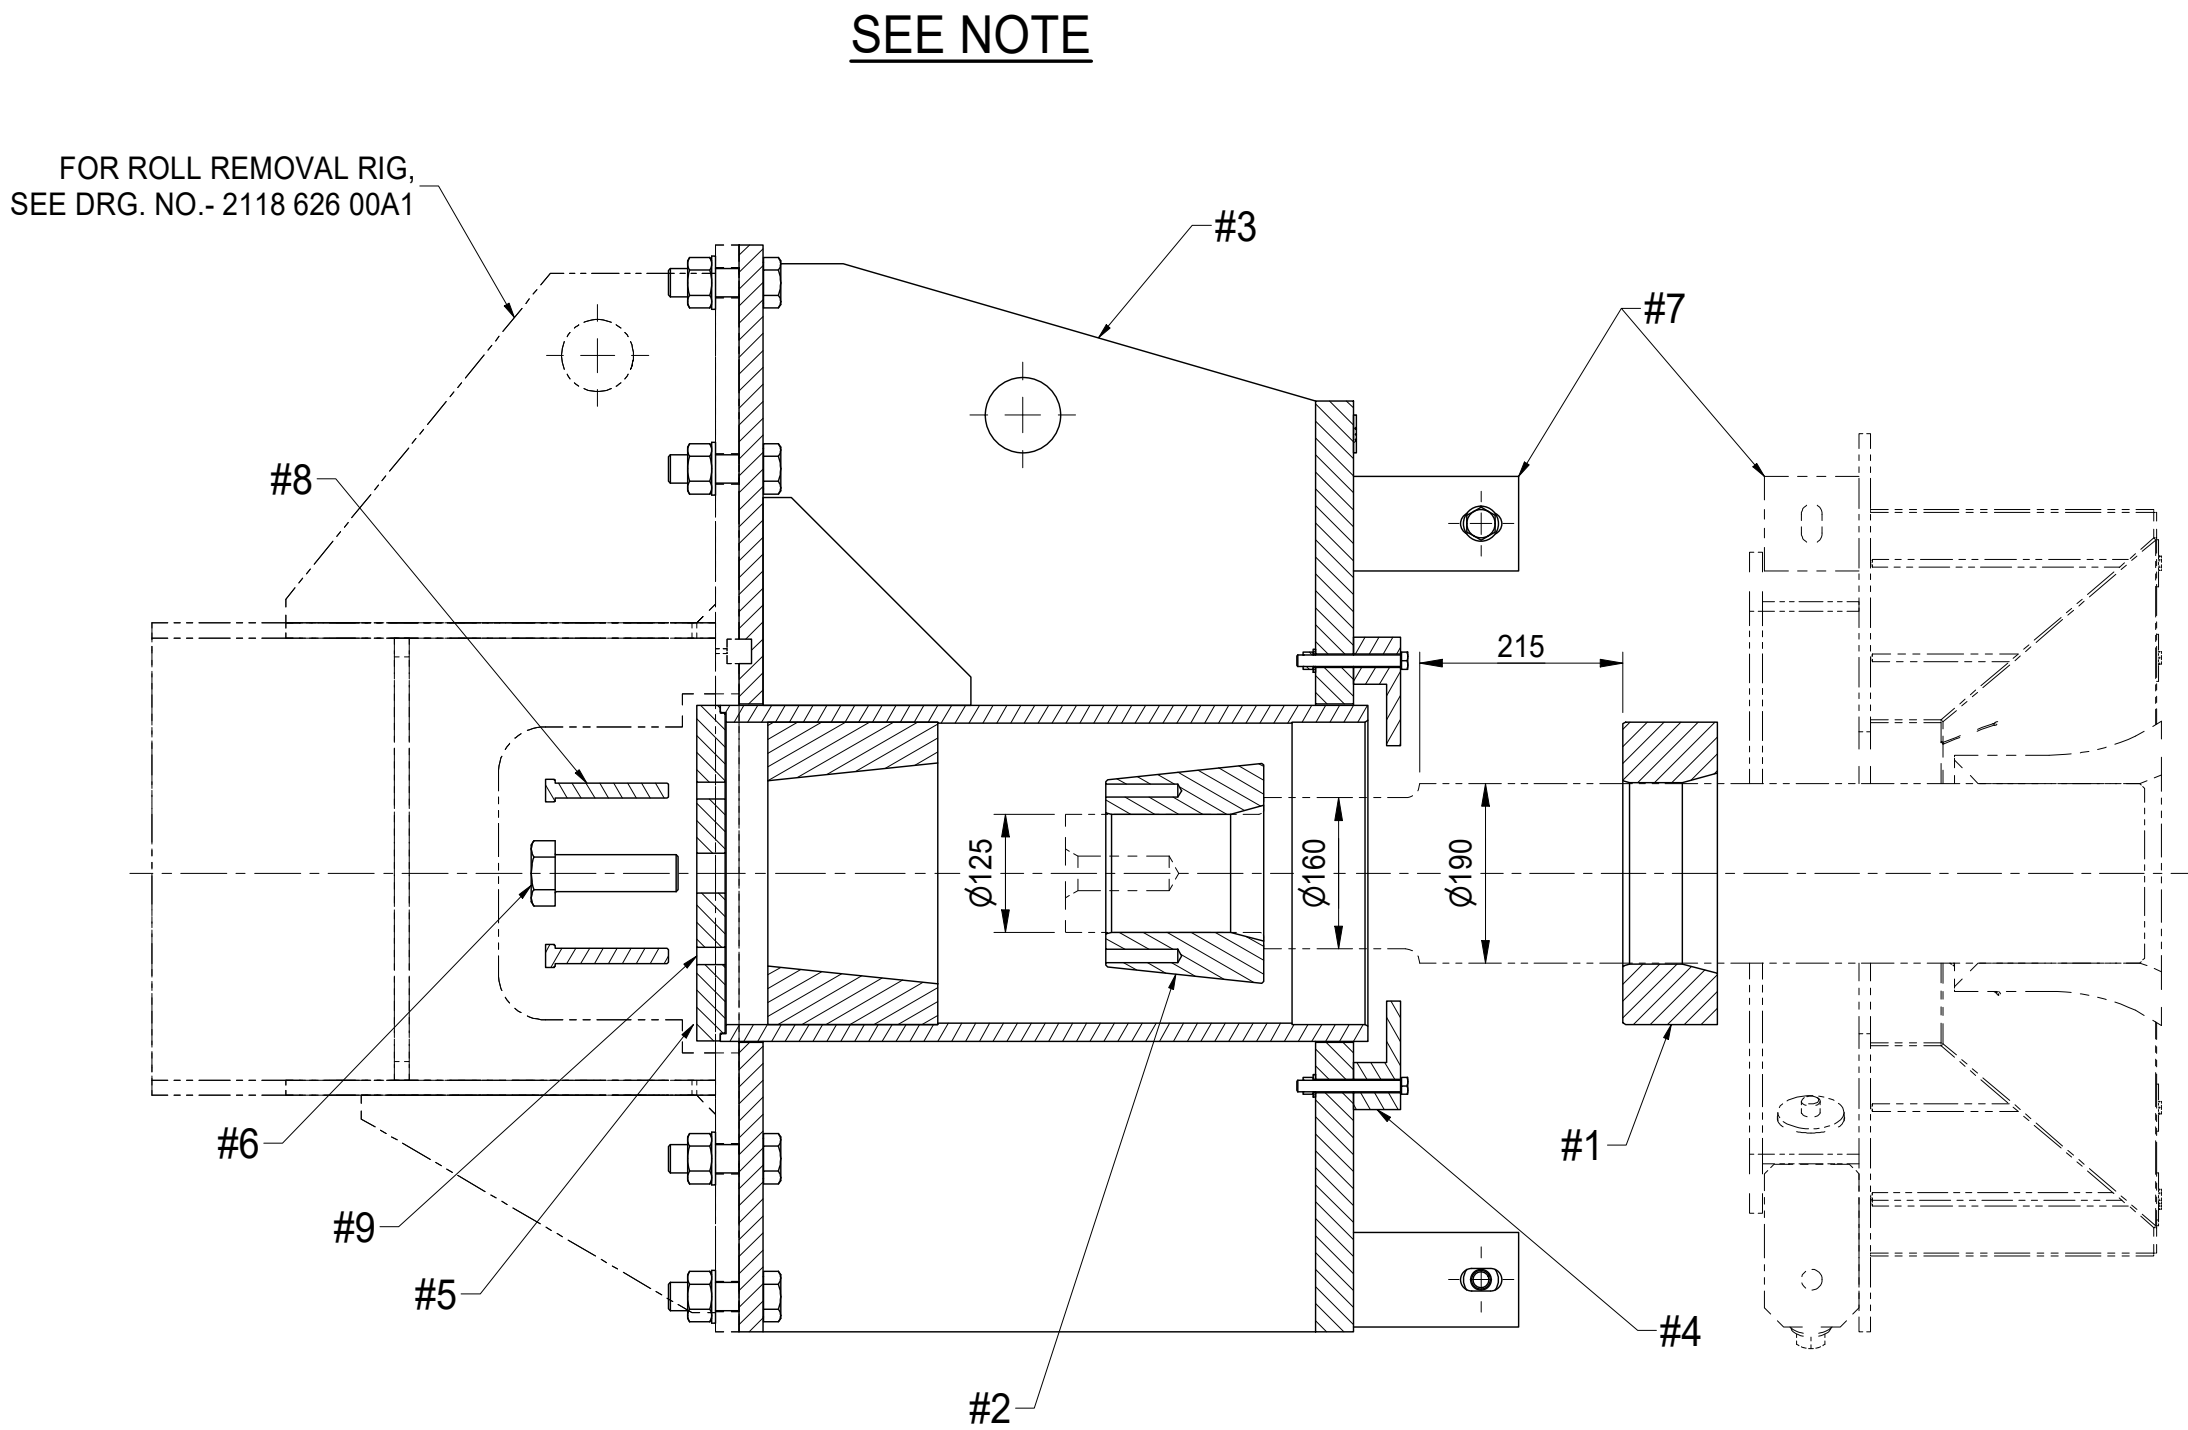
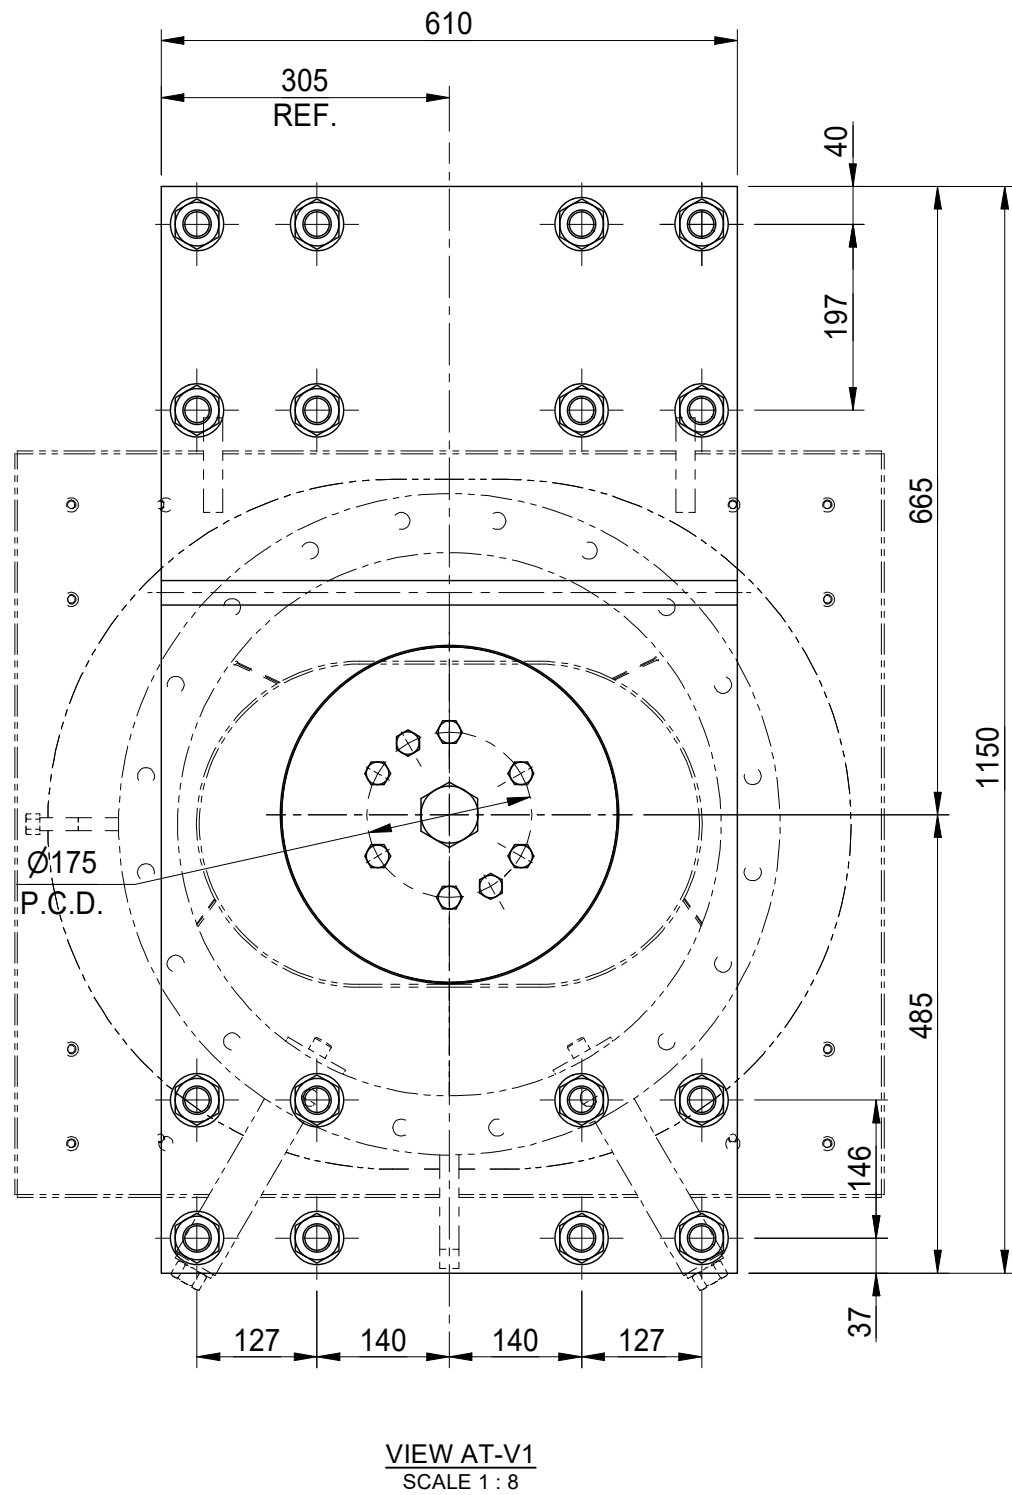
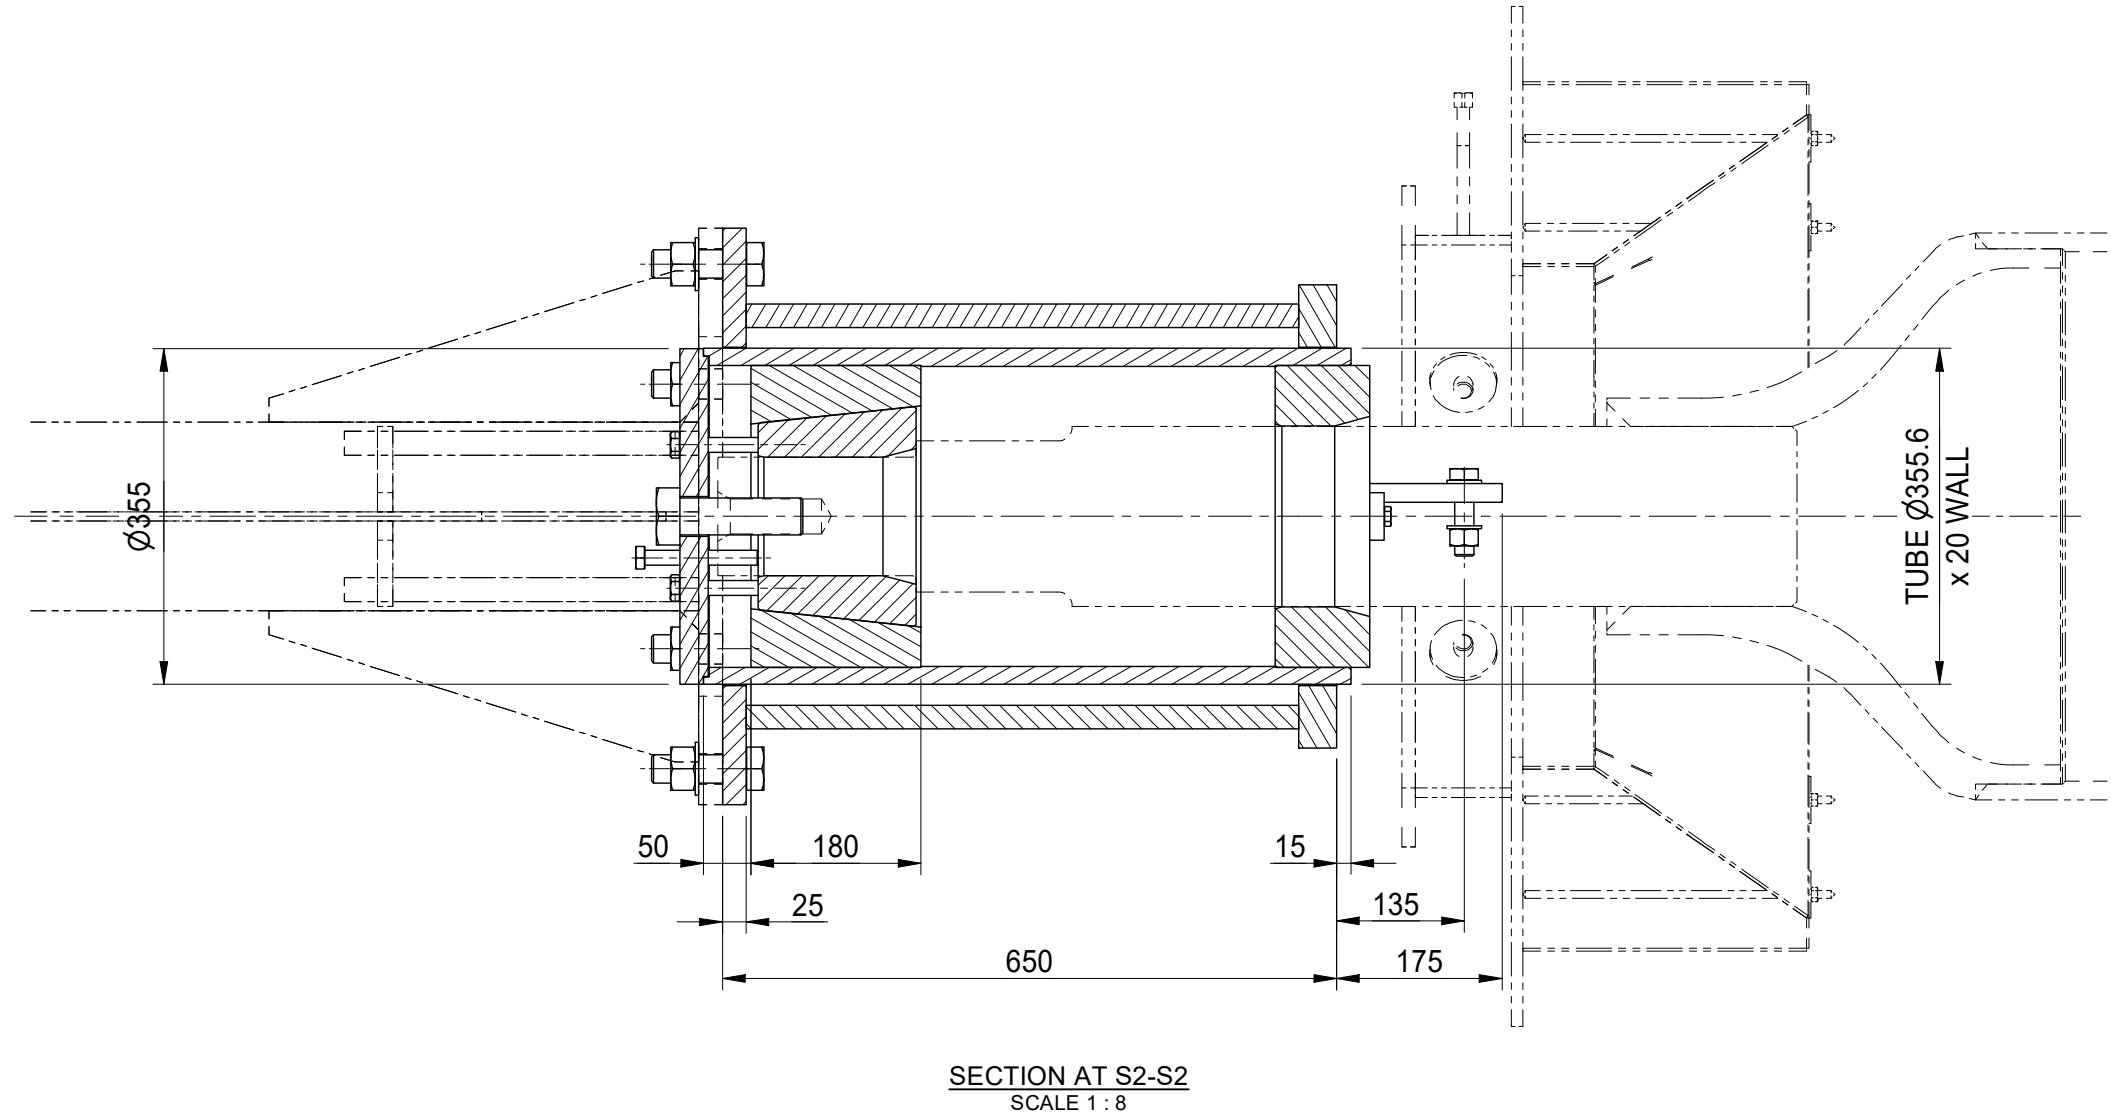


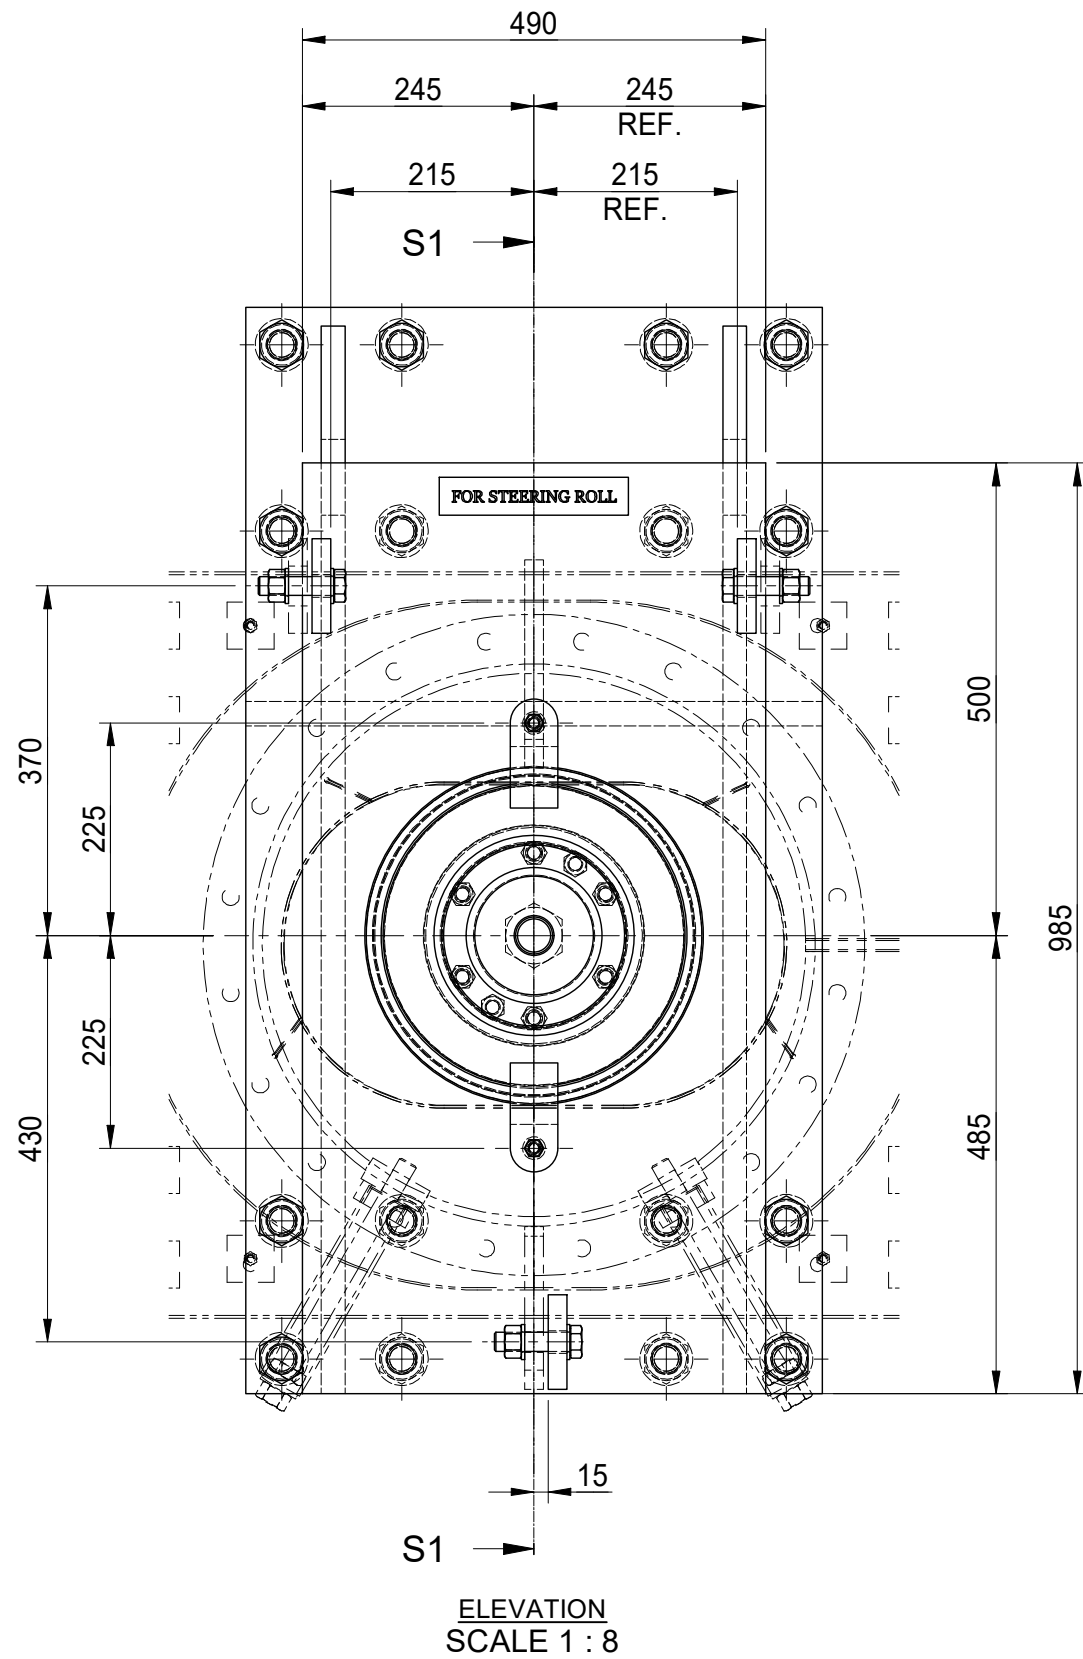

SEE NOTE

ROLL REMOVAL SEQUENCE

- #1. SLIDE ROLL CENTERING BUSHING ON ROLL STUB END. (190 DIA.)
- #2. SLIDE ROLL CONICAL BUSHING ON ROLL STUB END. (125 DIA.)
- #3. POSITION HANDLING RIG/ADAPTER IN-LINE WITH ROLL CENTER. MOVE RIG UNTIL THE CENTERING BUSHING IS SEATED INSIDE ROLL ADAPTER.
- #4. ATTACH CLAMPS TO HOLD CENTERING BUSHING. (M12 BOLTS)
- #5. INSERT CAP PLATE.
- #6. INSERT M40 BOLT INTO CAP PLATE. MOVE RIG UNTIL M40 BOLT ENGAGES STUB END.
- #7. TIGHTEN M40 BOLT UNTIL BRACKETS ON ADAPTER & ROLL BUNG ALIGN. CONNECT WITH M20 BOLTS.
- #8. ALIGN THRU HOLES IN CAP PLATE WITH THREADED HOLES IN CONICAL BUSHING, THEN TIGHTEN WITH (3) M16 BOLTS.
- #9. TO REMOVE REVERSE STEPS 1 THRU 8. INSERT M16 BOLTS INTO THREADED HOLES IN CAP PLATE TO JACK CONICAL BUSHING OUT OF RIG ADAPTER.

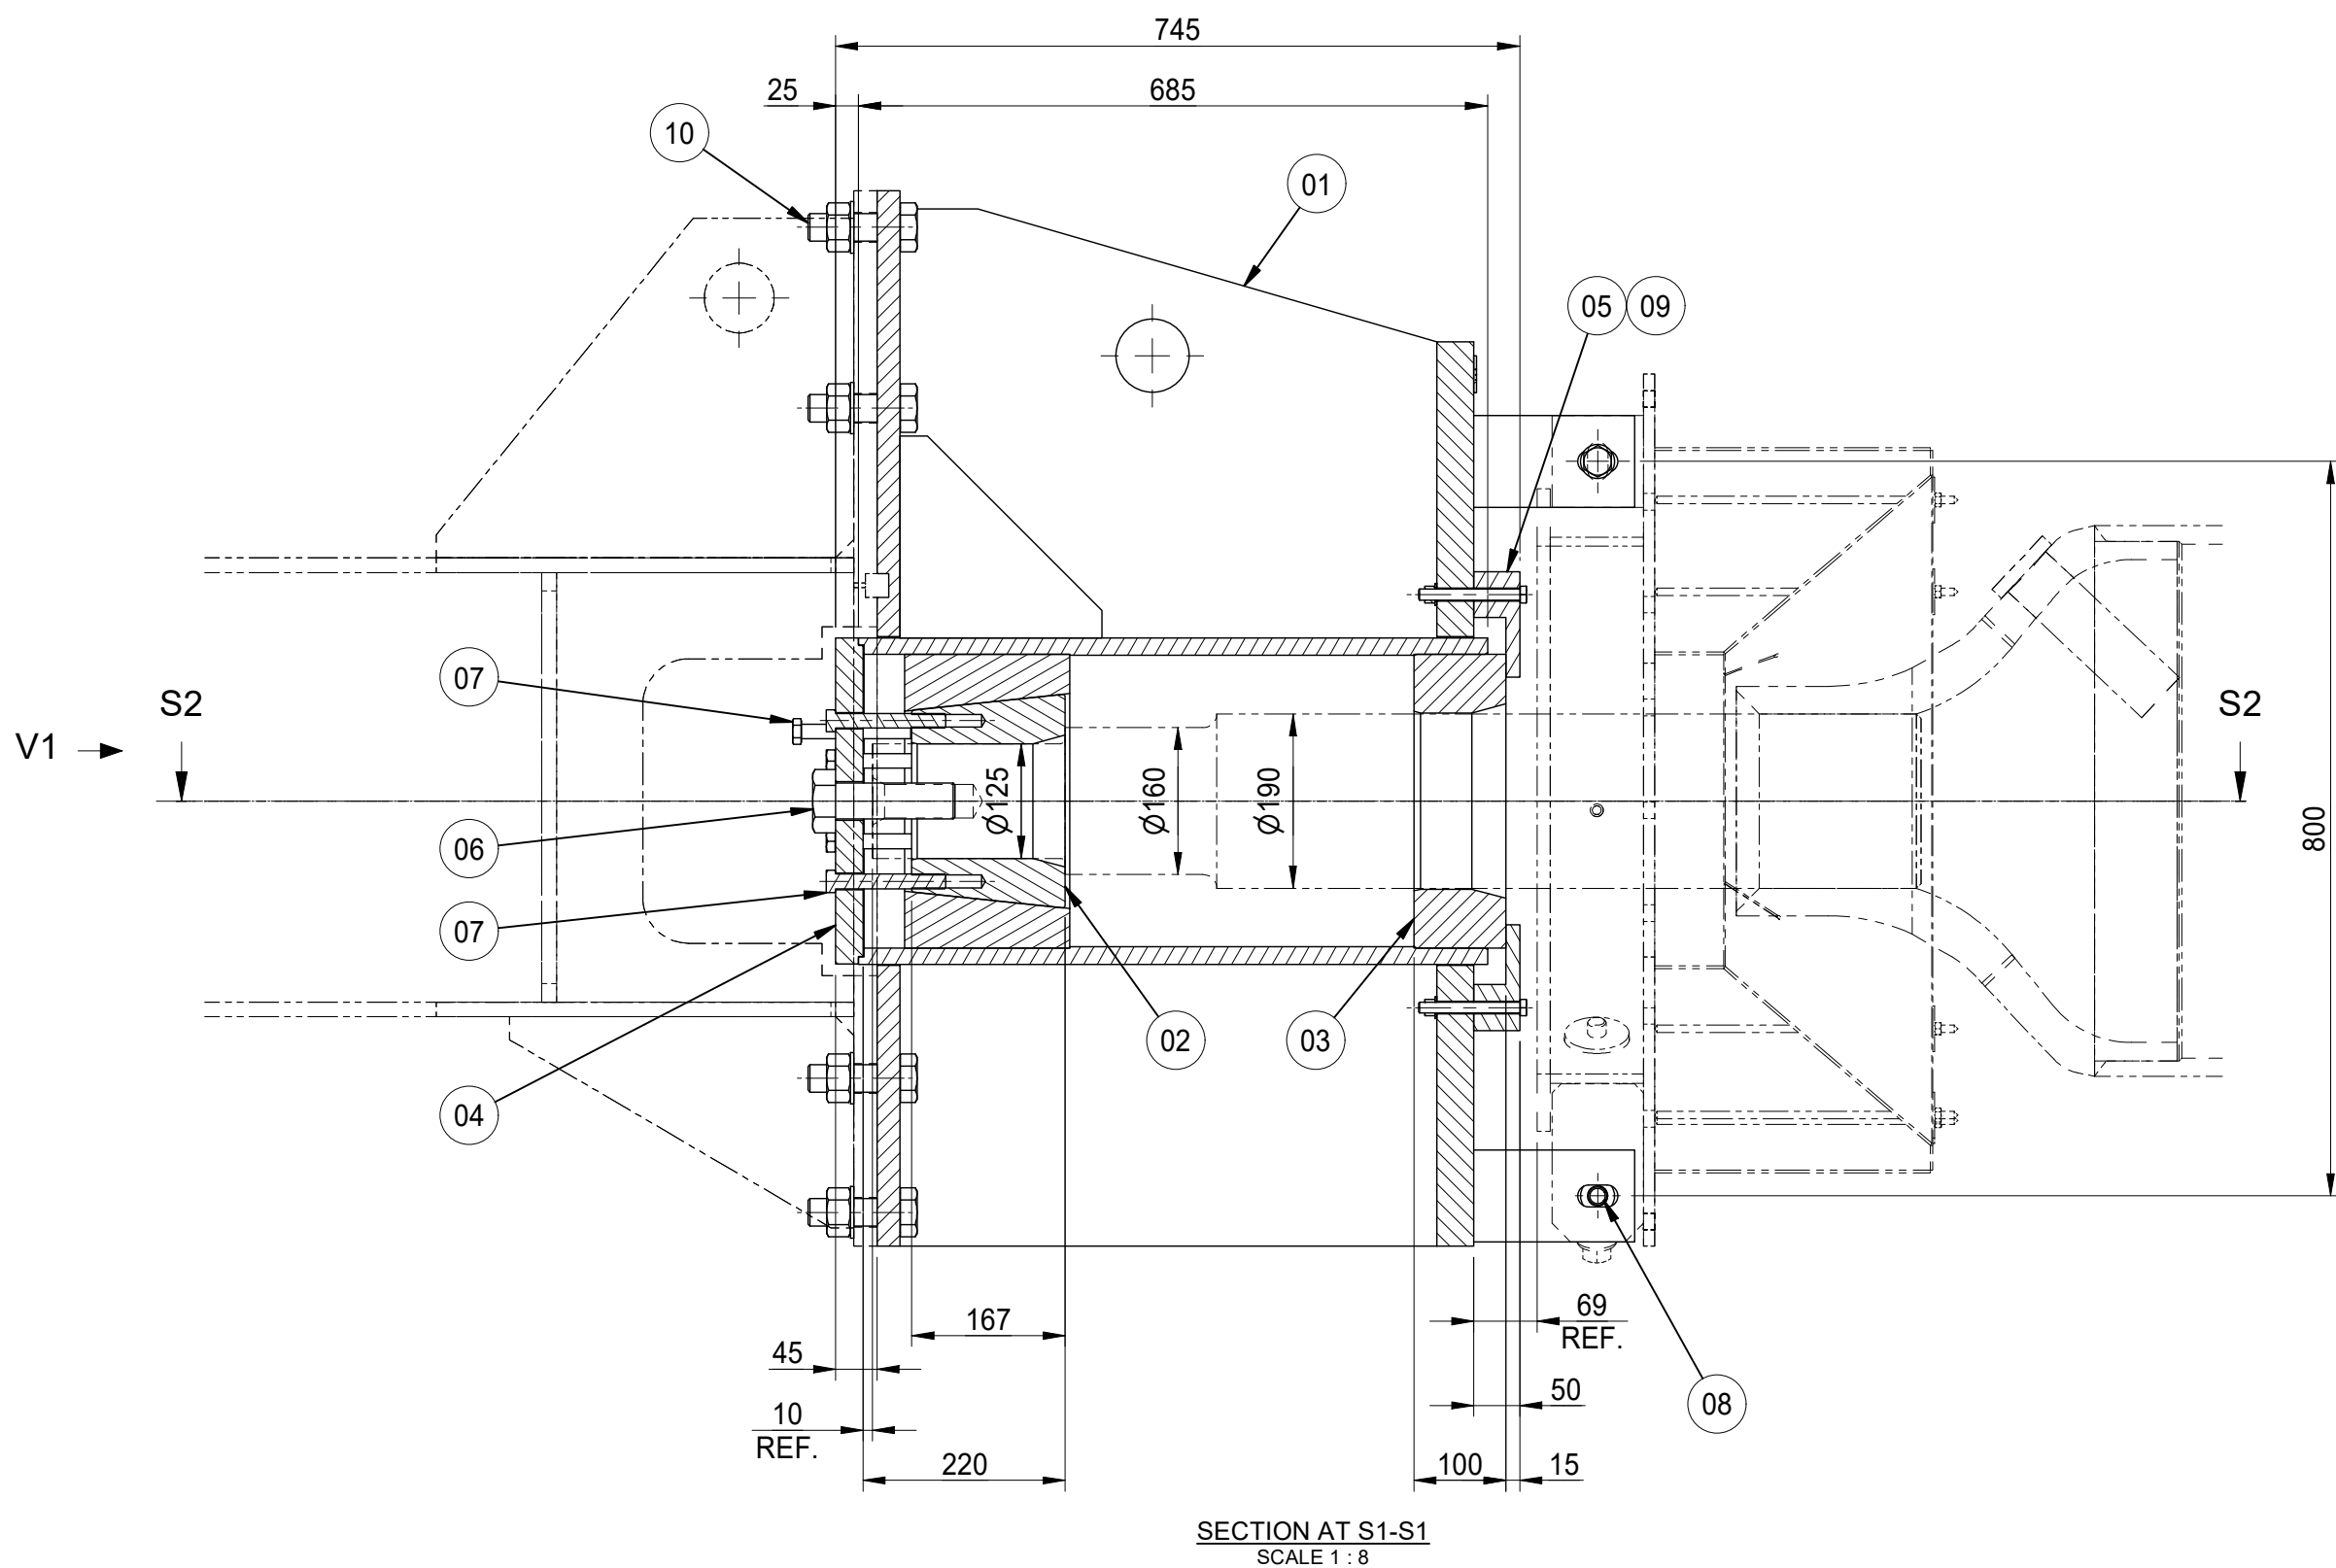

NOTE:- *CAUTION* - DO NOT REUSE M30 BOLTS, NUT, & WASHERS. DISCARD & REPLACE AT EACH ADAPTER CHANGEOVER.

A 8/26/2024			First Release						Darpan_B			
REV	DATE		DESCRIPTION						DRN		APD	
REVISION												
MACHINING TOLS. UNLESS SPECIFIED						SURFACE FINISH						
ANGULAR DIMS			LINEAR DIMS.			SYMBOL			Ra μ			
			OVER	UPTO	TOL.	25			25			
			-	6	± 0.1	12.5			12.5			
			6	30	± 0.2	6.3			6.3			
			30	120	± 0.3	3.2			3.2			
			120	315	± 0.5	1.6			1.6			
			315	1000	± 0.8	0.8			0.8			
			6	30	± 10'	1000			2000 ± 1.2			
			30	120	± 20'	2000			4000 ± 2.0			
			120	400	± 30'	4000			- ± 3.0			
						0.1			0.1			
DO NOT SCALE									NAME		DATE	
SCALE : 1 : 8						DRN			raju.mestry		8/26/2024	
						APPD			Darpan_B		8/26/2024	
						REVDD					8/26/2024	
TITLE :												
GENERAL NOTES						STEERING ROLL HANDLING RIG ADAPTOR ASSEMBLY						
ALL DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE. MANUFACTURING SHALL BE DONE AS PER RELEVANT CLAUSES OF JOHN COCKERILL'S GENERAL SPECIFICATION NO. JOL-GS-001. HOWEVER, INFORMATION ON DRAWING SHALL HAVE PRECEDENCE IN CASE OF CONFLICTS. SURFACE FINISH OF MACHINED FACES TO BE $\sqrt{32}$ OR BETTER, UNLESS SPECIFIED OTHERWISE. ALL SHARP EDGES TO BE CHAMFERED TO 0.6x45° (MAX). ALL SHARP CORNERS SHALL HAVE RADIUS 0.4 (MAX). REMOVE BURRS FROM ALL FEATURES. ALL GAS CUT EDGES SHALL HAVE SURFACE FINISH $\sqrt{63}$ OR BETTER.						DRG. No. 2118 626 01A1						
						SHEET No. 1 OF 1						
						REV. A						
						SIZE A1						
						THIS DRAWING IS PROPERTY OF JOHN COCKERILL INDIA LTD. THIS MUST NOT BE COPIED OR REPRODUCED IN ANY MANNER OR DESIGN DISCLOSED OR PARTS MANUFACTURED THERE OF WITHOUT WRITTEN PERMISSION OF JOHN COCKERILL INDIA LTD.						