

CS23532-COMPUTER NETWORKS-LAB MANUAL




Practical-2

Aim: Study of different types of Network cables.

a) Understand different types of network cable.

Different type of cables used in networking are:

1. Unshielded Twisted Pair (UTP) Cable
2. Shielded Twisted Pair (STP) Cable
3. Coaxial Cable
4. Fibre Optic Cable

Cable type	Category	Maximum Data Transmission	Advantages/ Disadvantages	Application/Use	Image
UTP	Category 3	10 bps	<u>Advantages</u> - Cheaper in cost - Easy to install as they have a smaller overall diameter. <u>Disadvantages</u> - More prone to (EMI) Electromagnetic interference and noise	10Base-T Ethernet	
	Category 5	Up to 100 Mbps		Fast Ethernet, Gigabit Ethernet	
	Category 5e	1Gbps		Fast Ethernet, Gigabit Ethernet	
STP	Category 6, 6a	10Gbps	<u>Advantages</u> - Shielded. - Faster than UTP. - Less susceptible to noise and interference <u>Disadvantages</u> - Expensive - Greater installation effort	Gigabit Ethernet, 10G Ethernet (55m) Widely used in data centres	
SSTP	Category 7	10Gbps		Gigabit Ethernet, 10G Ethernet (100m)	 

CS23532-COMPUTER NETWORKS-LAB MANUAL


Coaxial cable	RG-6 RG-59 RG-11	10-100Mbps	• High bandwidth • Immune to interference • Low loss bandwidth • Versatile • Disadvantages • Limited distance • Cost • Size is bulky	Speed of signal is 500m Television network High speed internet connections	
fibre optics cable	Single mode Multi mode	100Gbps	Advantages • High speed • High bandwidth • High security • Long distance Disadvantages • Expensive • Requires skilled installers	• Maximum distance of fibre optics cable is around 100meters	
Twin axial Cable	Twinax	Up to 10-40 Gbps	• High-speed transmission • Low latency • Less expensive than fiber for short distances Disadvantage • Limited distance • Less flexible	Data centers Server connections High-speed networking	
Direct Attach Copper (DAC)	Passive / Active DAC	Up to 400 Gbp	• Very low latency • Low power consumption • Cost-effective Disadvantage • Short transmission distance • Heavier than fiber	Data centers Switch-to-server connections	
Ribbon Fiber Cable	Multi-fiber	Up to 400 Gbps+	• Many fibers in a compact cable • High fiber density • Easy mass splicing Disadvantages • More difficult to handle • Higher installation complexity	Data centers Telecommunication networks	

CS23532-COMPUTER NETWORKS-LAB MANUAL

b) Make Your Own Ethernet Cross-Over Cable/ Straight cable


Tools and parts needed:

- Ethernet cabling. CAT5e is certified for gigabit support, but CAT5 cabling works as well, just over shorter distances.
- A crimping tool. This is an all-in-one networking tool shaped to push down the pins in the plug and strip and cut the shielding off the cables.
- Two RJ45 plugs.
- Optional two plug shields.

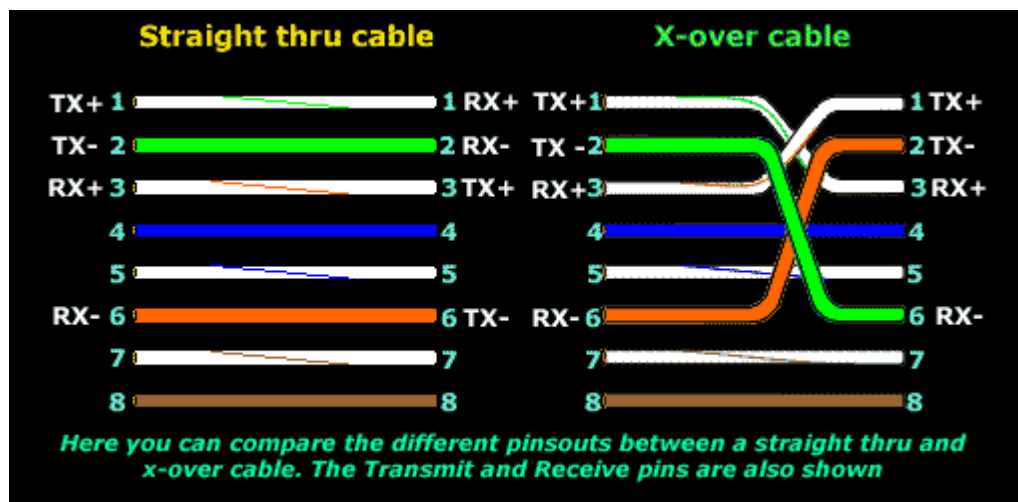


Difference between crossover cable and straight cable

Take a print out the diagram below or have it handy as a reference

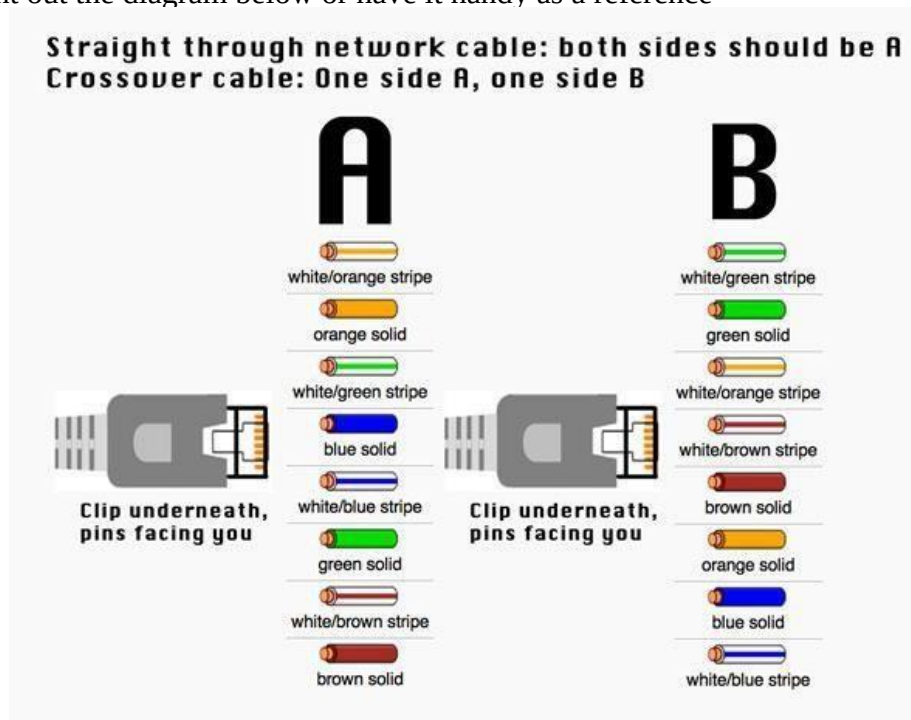


CS23532-COMPUTER NETWORKS-LAB MANUAL

Step 1: To start construction of the device, begin by threading shields onto the cable.

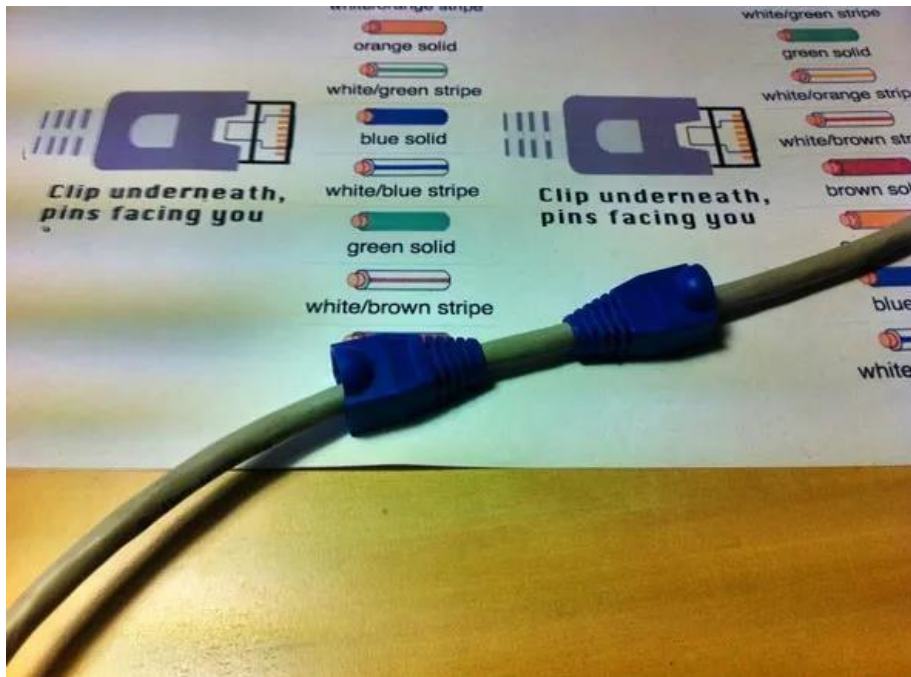


Step 2: Next, strip approximately 1.5 cm of cable shielding from both ends. The crimping tool has a round area to complete this task.

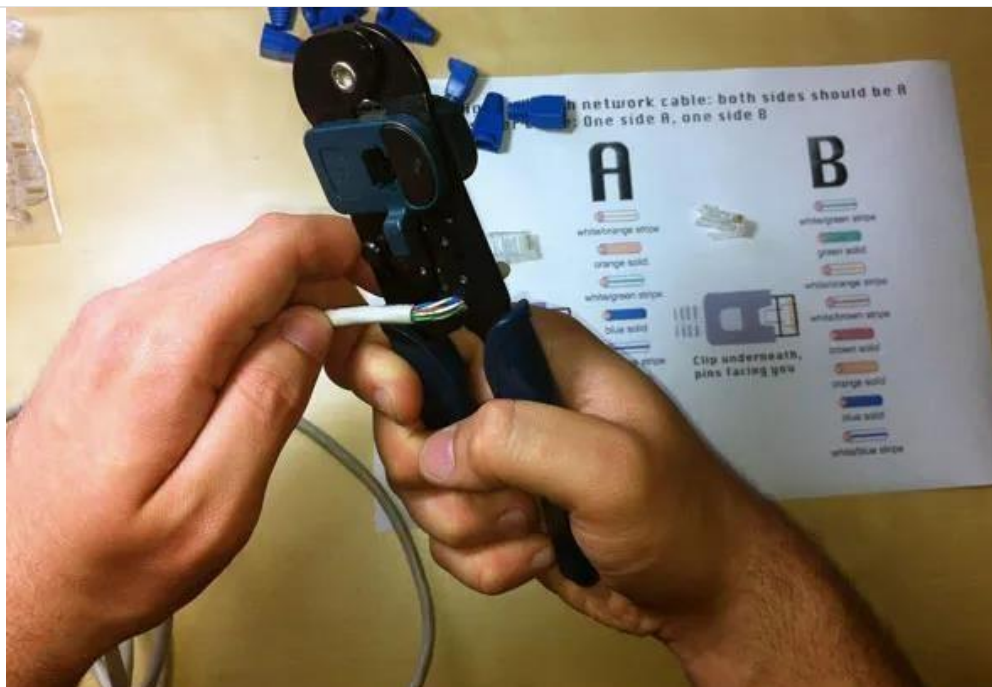


CS23532-COMPUTER NETWORKS-LAB MANUAL

Step 3: After, you will need to untangle the wires; there should be four “twisted pairs.” Referencing back to the sheet, arrange them from top to bottom. One end should be in arrangement A and the other in B.

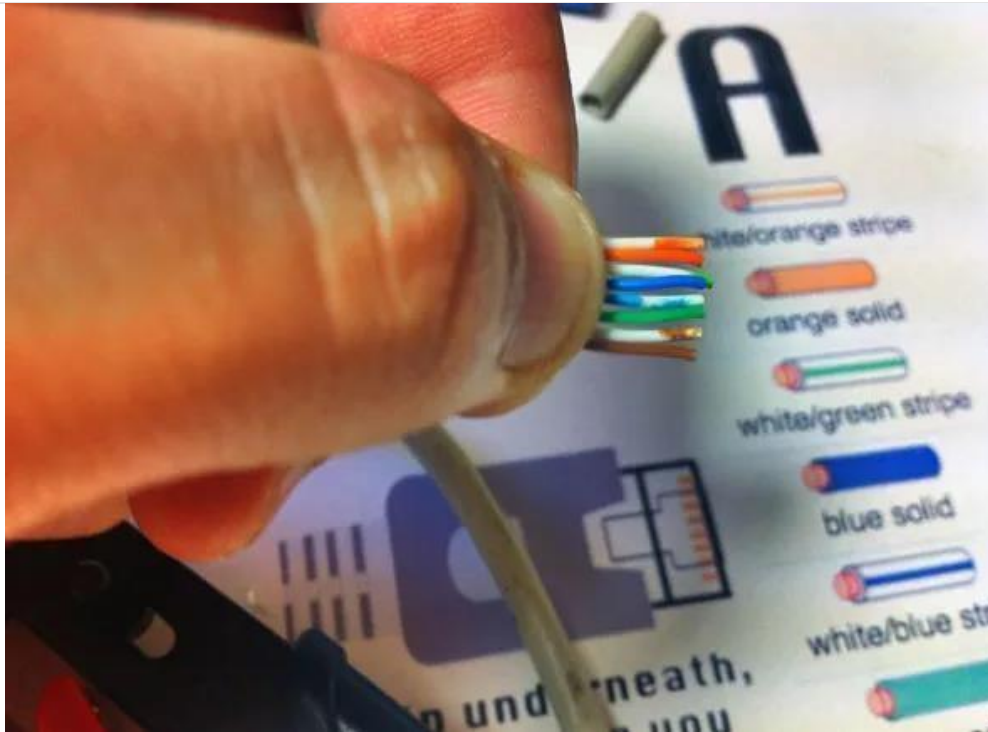


Step 4: Once the order is correct, bunch them together in a line, and if there are any that stick out farther than others, snip them back to create an even level. The difficult aspect is placing these into the RJ45 plug without messing up the order. To do so, hold the plug with the clip side facing away from you and have the gold pins facing toward you, as shown.

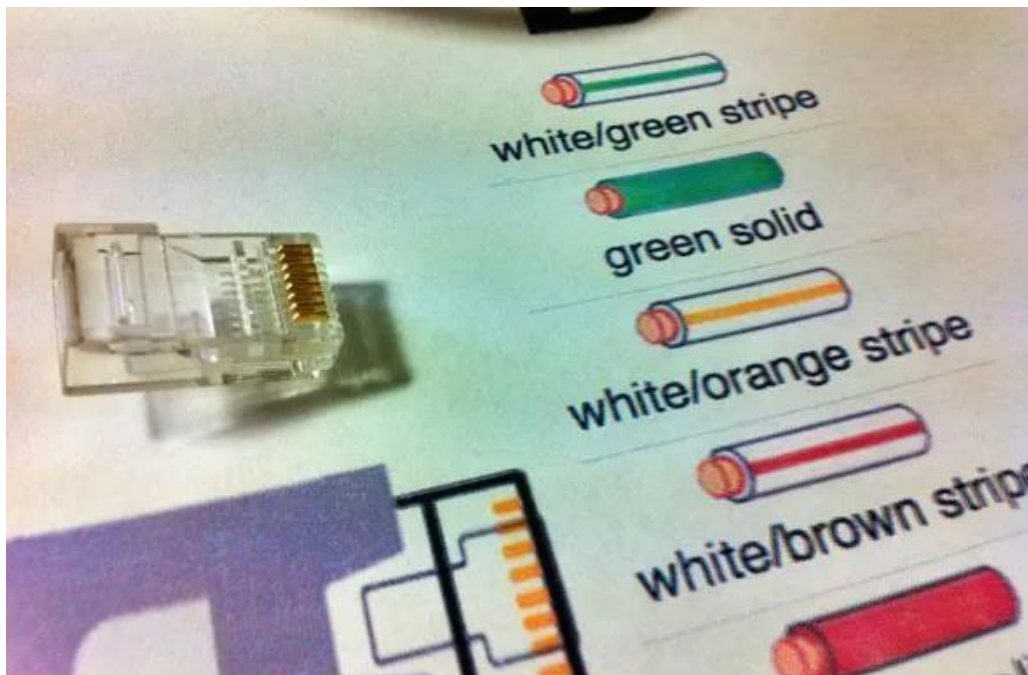

CS23532-COMPUTER NETWORKS-LAB MANUAL

Step 5: Next, push the cable right in. The notch at the end of the plug needs to be just over the cable shielding, and if it isn't, that means that you stripped off too much shielding. Simply snip the cables back a little more.

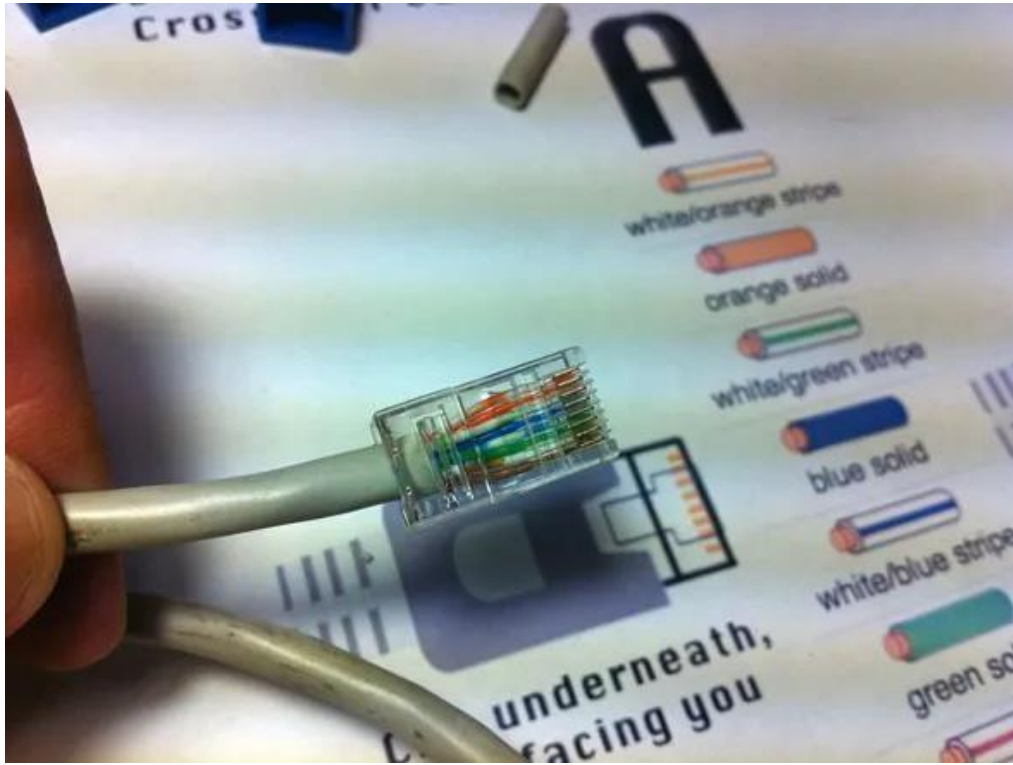

Step 6: After the wires are securely sitting inside the plug, insert it into the crimping tool and push down.

It should be shaped correctly, but pushing too hard can crack the fragile plastic plug.

Step 7: Lastly, repeat for the other end using diagram B (to make a crossover cables)/ using diagram A (to make a straight through cable)

To test it, plug it in and attempt to connect two devices directly.

Student observation:-

1. What is the difference between cross cable and straight cable?

A **straight-through cable** has the **same wiring standard (T568A or T568B) at both ends**. It is generally used to connect **different types of devices**, such as a PC to a switch.

A **crossover cable** has **different wiring standards at each end** (T568A at one end and T568B at the other). It is traditionally used to connect **similar devices**, such as PC-to-PC.

CS23532-COMPUTER NETWORKS-LAB MANUAL

2. Which type of cable is used to connect two PCs?

Answer: Cross cable

3. Which type of cable is used to connect a router/switch to your PC?

Answer: Straight cable

4. Find out the category of twisted pair cable used in your lab to connect the PC to the network socket.

Answer: Category 5e (Cat 5e) UTP cable

It supports data transmission speeds of up to **1 Gbps** and is commonly used for LAN connections.

5. Write down your understanding, challenges faced and output received while making a twisted pair cross/straight cable.

Understanding:

I understood the different wiring standards, **T568A and T568B**, and learned how to arrange the colored wires correctly before inserting them into the RJ-45 connector.

Challenges Faced:

The main challenges were arranging the wires in the correct sequence, keeping them straight, cutting them to the same length, and properly crimping the RJ-45 connector.

Output Received:

The twisted-pair cable was successfully made and tested using a cable tester. The cable tester showed the correct sequence, confirming that the cable was working properly.
