




Light Loving Robot / Shade Loving Robot



STEM
Build
Learn
Create

ASSEMBLY & OPERATION GUIDE

Plug each module into the correct JST port

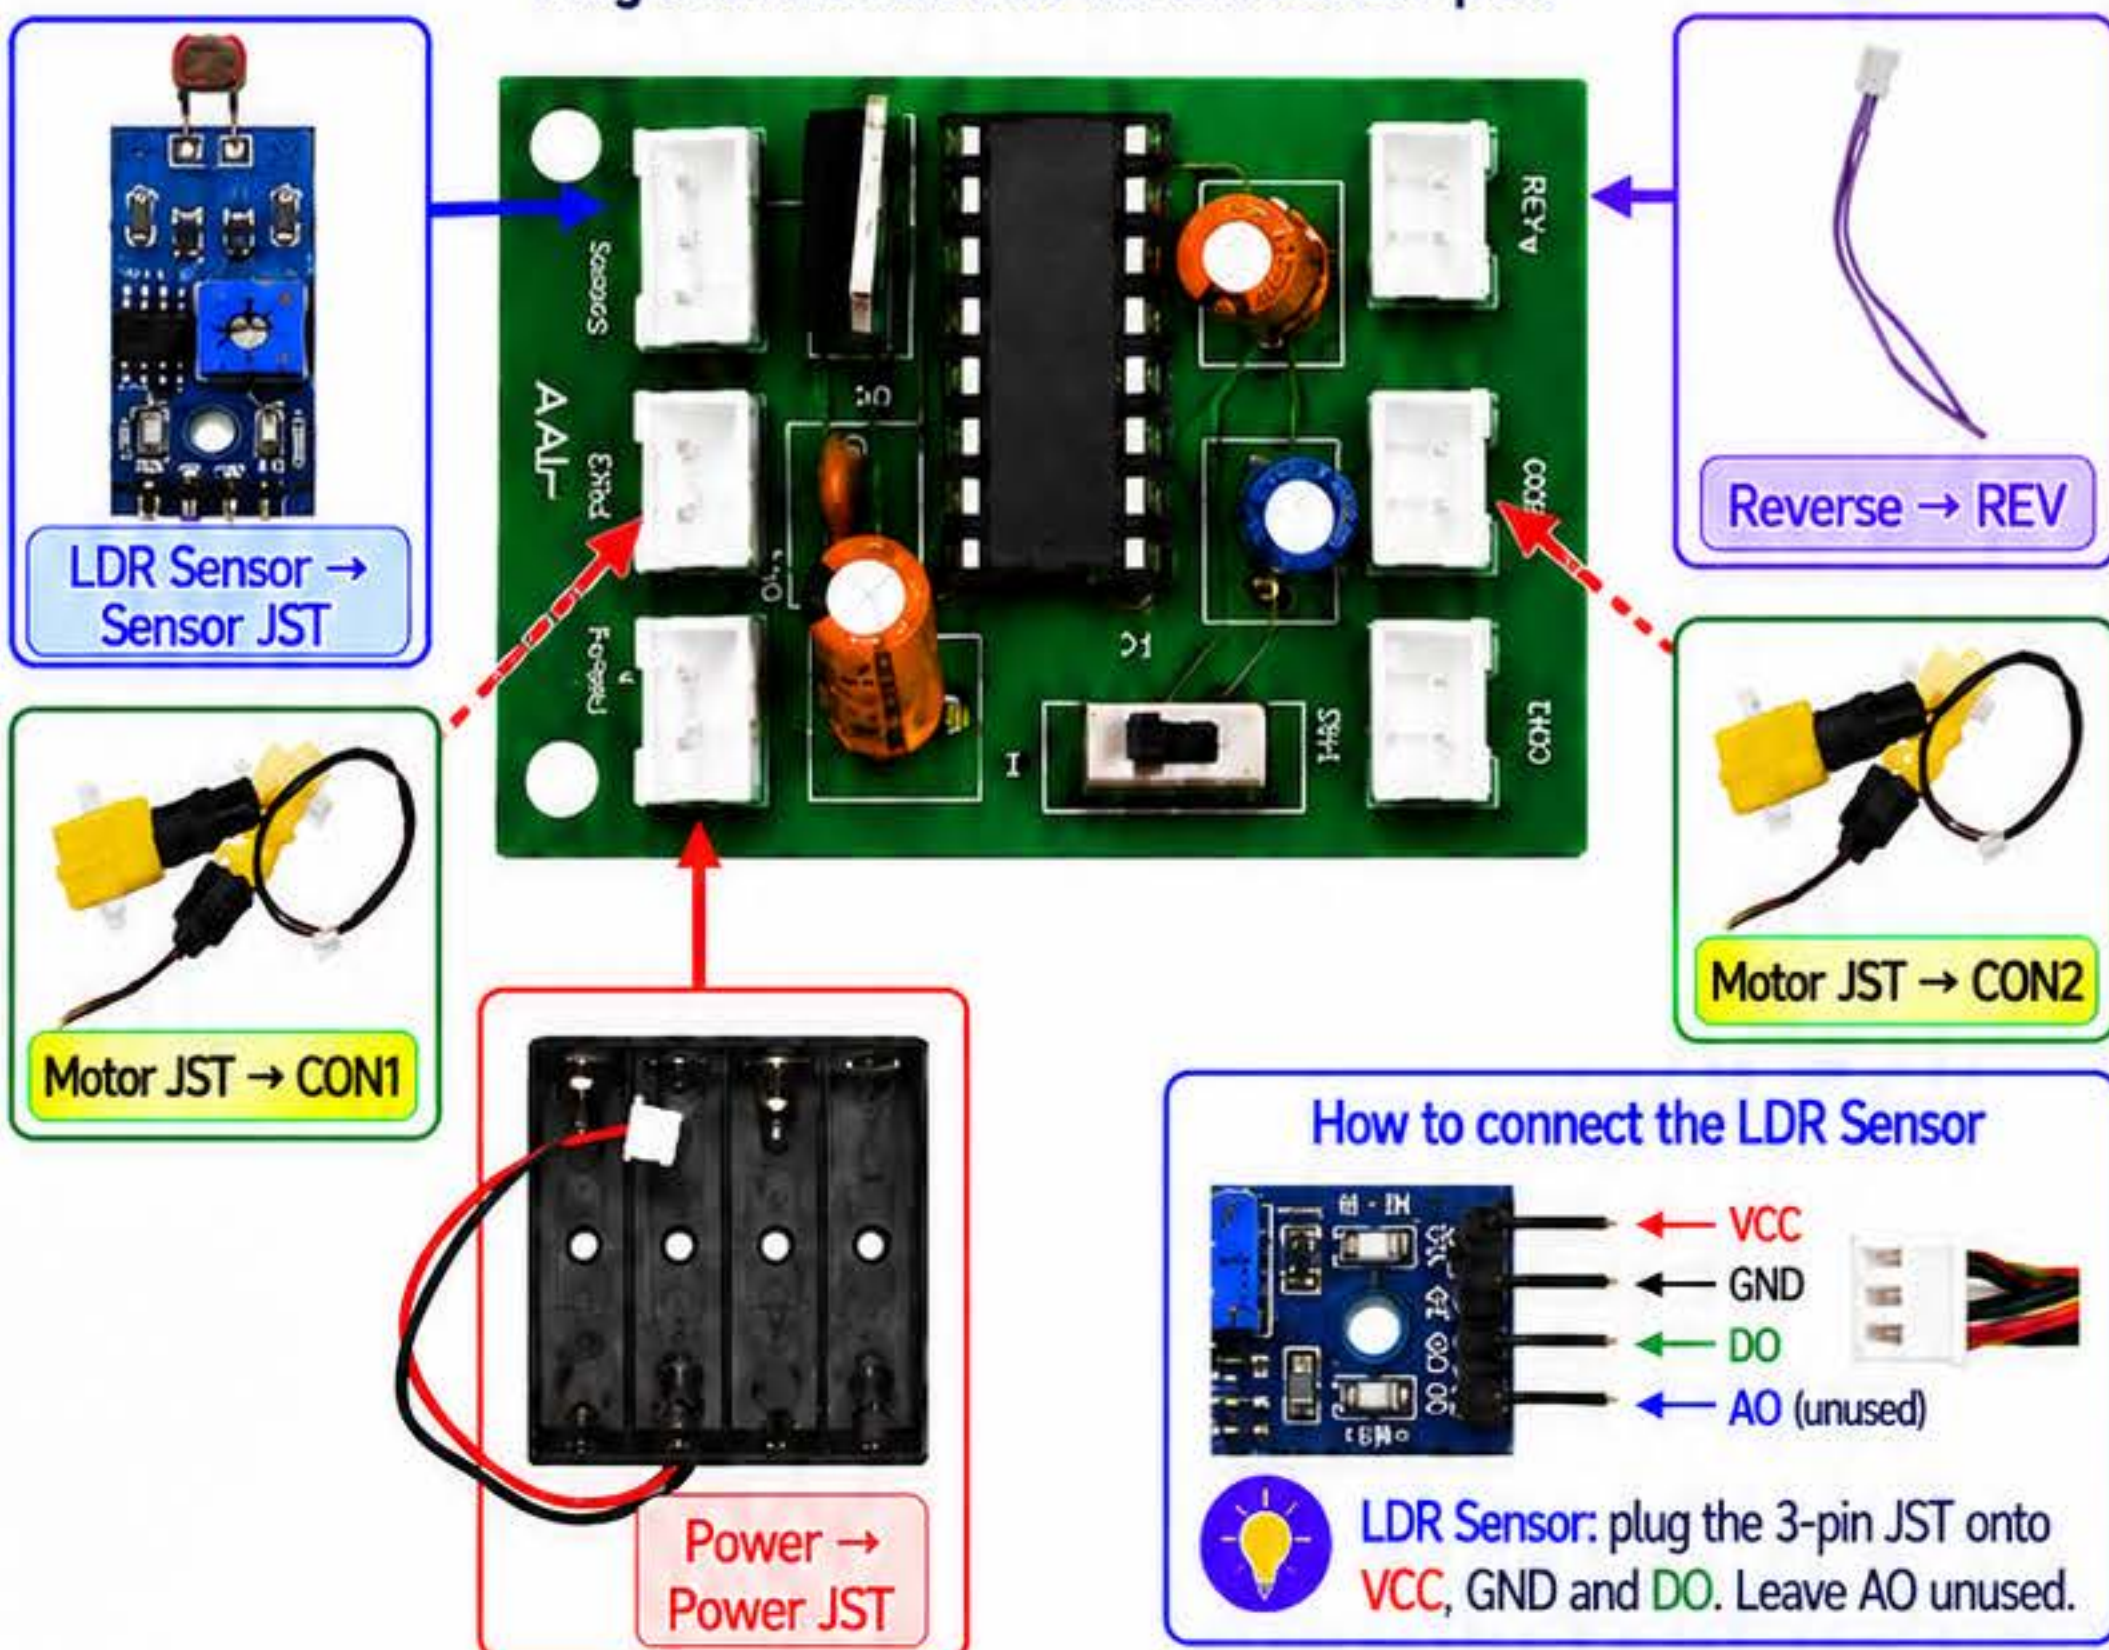

Setup Steps

- 1 Prepare the Chassis by following the "Steps to Assemble Chassis" on Page 3
- 2 Mount the battery holder on chassis at Position 1 using Velcro
- 3 Mount the PCB Board on the Chassis at Position 2 using Velcro
- 4 Mount the LDR Sensor on the Chassis at Position 3 using Velcro
- 5 Connect the LDR Sensor to the Sensor JST connector on the PCB board using the 3-pin to 3-pin JST cable
- 6 Connect the Motor JST connector to CON1 or CON2 on the PCB board
- 7 Connect the Reverse JST cable to REV JST connector on the PCB board
- 8 Connect the Battery Holder to the Power JST connector on the PCB board
- 9 Check that all connections are secure before switching on the power



How to Try It

- 1 Switch ON the circuit.
- 2 When light falls on the sensor, the robot moves towards the light (Light Loving Robot).
- 3 When light falls on the sensor, the robot moves backwards (Shade Loving Robot).
- 4 Observe its movement.



Challenge yourself!

Find where to connect the motors yourself.

1 Light Loving Robot

Robot moves forward in **bright light**



2 Shade Loving Robot

Robot moves backward when there is light



Tip:

To change from Light Loving Robot to Shade Loving Robot - Change the Motor JST from CON1 to CON2 or from CON2 to CON1.



Small Projects. Big Possibilities!

EXPLORE • LEARN • INNOVATE