Proteus Automation System
Network Proteus User Manual

Date

Original Date:	020122	Document Version	0.1
Last Revision Date:	020122		

Author Information

Product Name:	Proteus Automation	Author:	Kavitha Patchamalai
		Title:	Product Management
		E-mail:	experis.automation@dell.com

SECURITY WARNING

The information contained herein is proprietary to Dell Inc. and must not be disclosed to non-Dell personnel. The recipient of this document, by its retention and use, agrees to protect the information contained herein.

Readers are advised that this project may be subject to the terms of a non-disclosure agreement.

Document Revision History

The revision history shows the history for this Product Design Document and provides descriptions of changes made.

Date	Version	Section/Page	Update Description	Contact Name
020122	1.0	All	Initial Draft	April Jewell

Contributors

The content of this document has been authored with the combined input of the following group of key individuals.

Name	Role	Area
Ashwini Kalyanpur	UI Front End Developer	India

Document Approval History

The section tracks the review and approval of this Product Design Document.

Name	Email	Role	Responsibility
April Jewell	April_Jewell@Dellteam.com	Project Manager	Approver

Internal Use - Confidential

Contents

Document Revision History I
Contributors I
Document Approval History I
Network Proteus 3
Log In 3
NMES001 UI 4
Create Baseline 4
Compare Baseline 5
Device Compliance 6
Push Baseline 7
Log Out 10

Internal Use - Confidential

Network Proteus

The Network Proteus application automates various tasks in Load balancing, Networking, and DNS administration that are manually handled by system engineers/administrators with minimal levels of automation.

You can perform the following tasks in the NMES001 modules:

Feature Name	Tasks
Create Baseline	Create baseline entering new SNMP configuration details
Compare Baseline	Compare a current configuration version with a previous/any version
Device Compliance	Identify non-compliant devices
Push Baseline	Push baseline configuration

Log In

Use your Dell email ID and password to log into Network Proteus. To separate the duties of individuals and to reduce the risk of malevolent activity without collusion, each module access is based on user roles assigned by the Dell System Administrator.

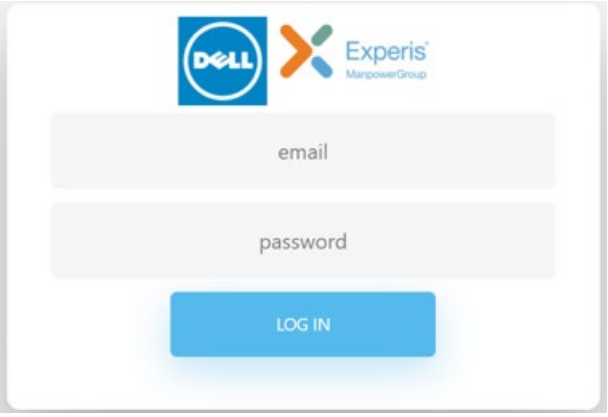

NMES001 UI

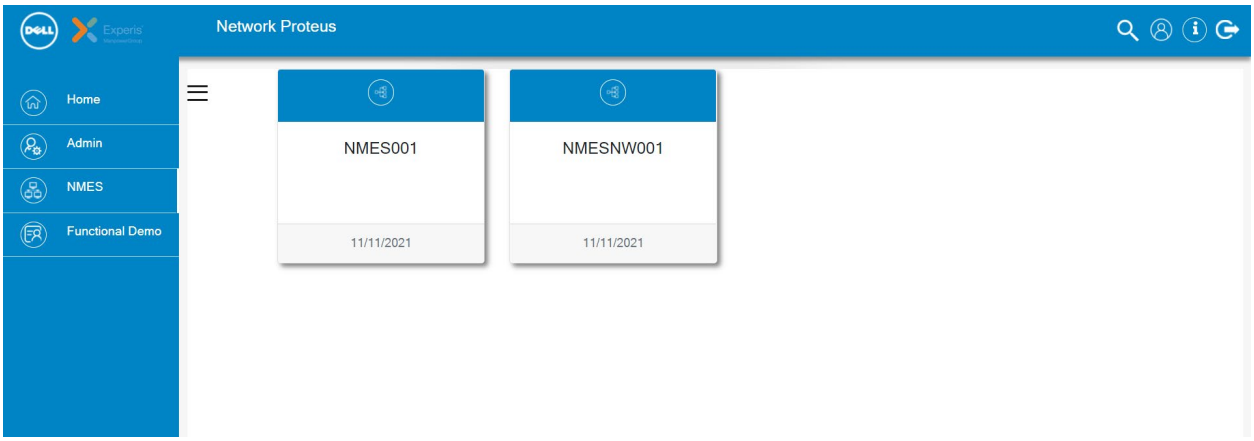

There are three modules in NMES001:

- Create Baseline
- Compare Baseline
- Device Compliance
- Push Baseline

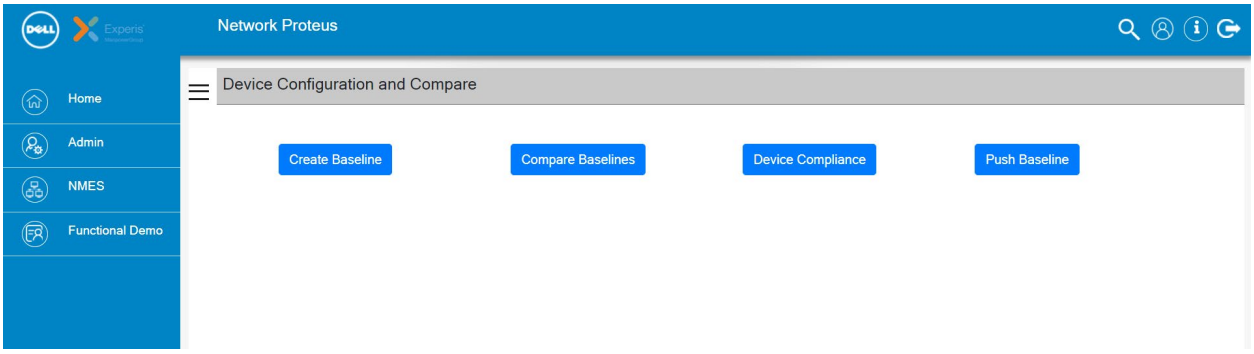

Create Baseline

You can create baseline entering new SNMP configuration details:

1. Select the name of the group, IP Address and then select subset mask and read write (RW):

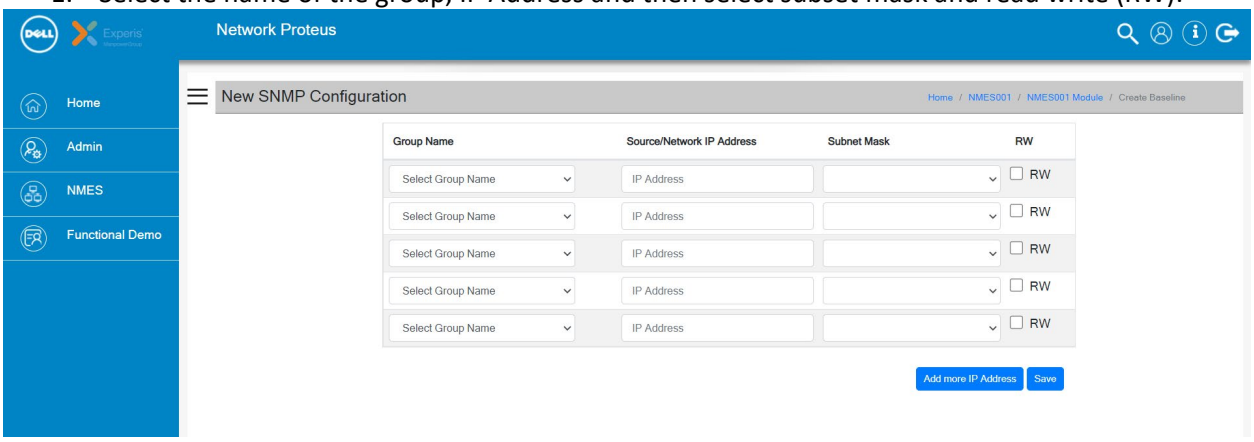

Internal Use - Confidential

2. Click Save or Add more IP address to include 5 more rows.

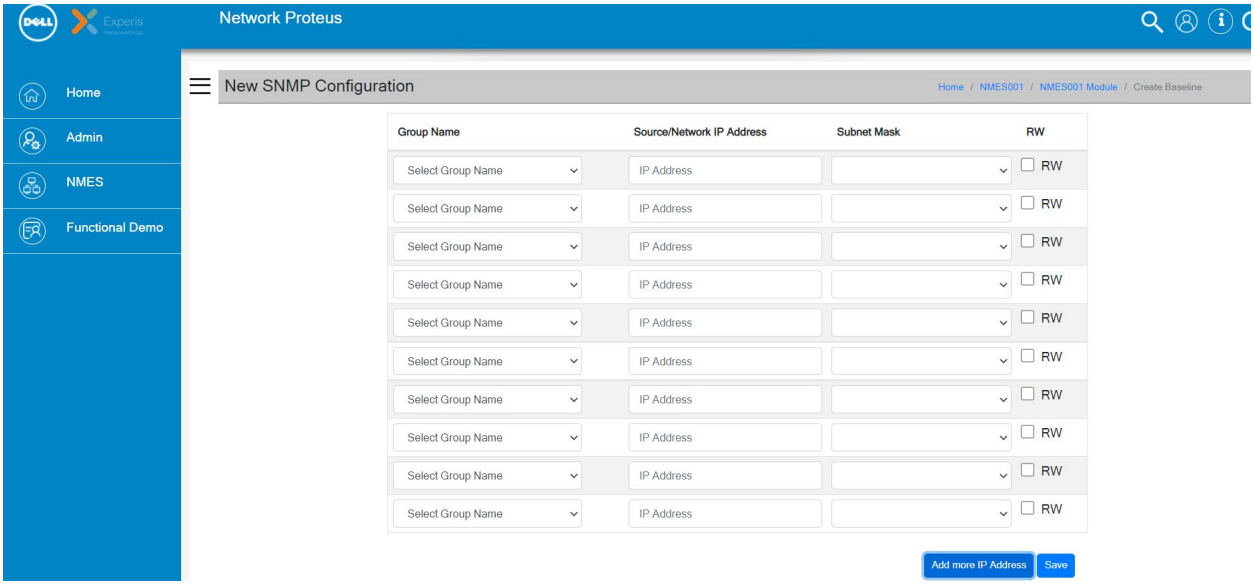

3. Click Save

Compare Baseline

You can compare a current configuration version with a previous/any version:

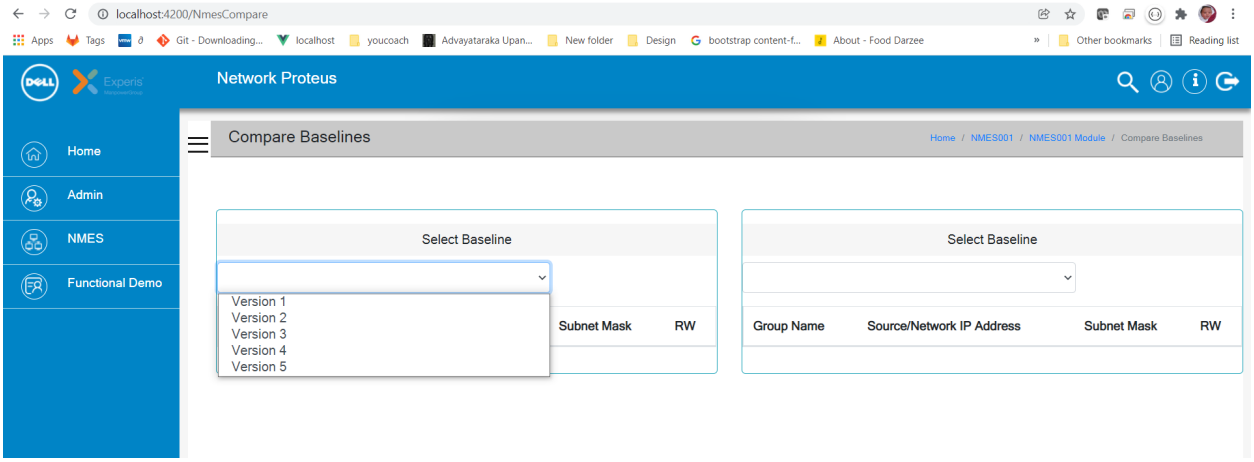

4. Select the baseline versions to compare. Network Proteus displays the baseline version comparison screen.

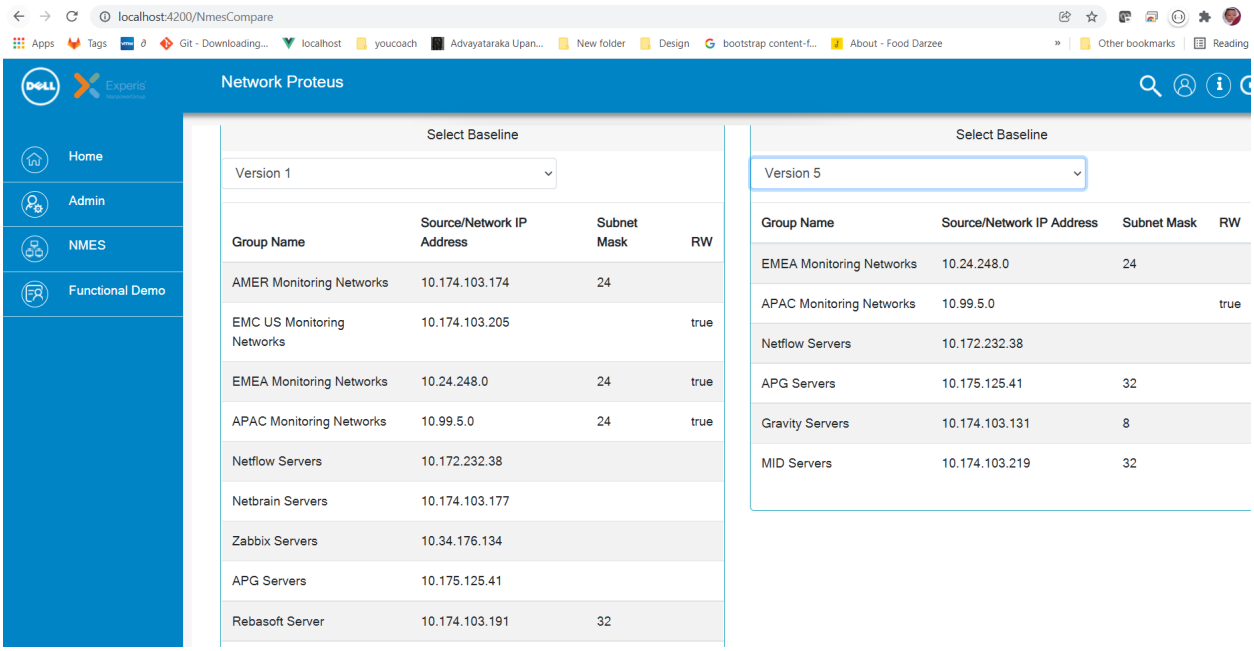

Device Compliance

You can identify non-compliant devices:

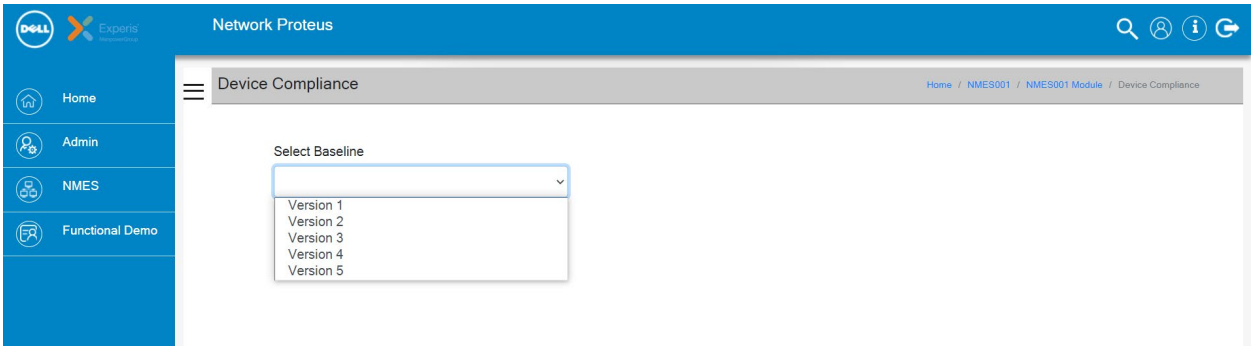

1. Select Baseline.

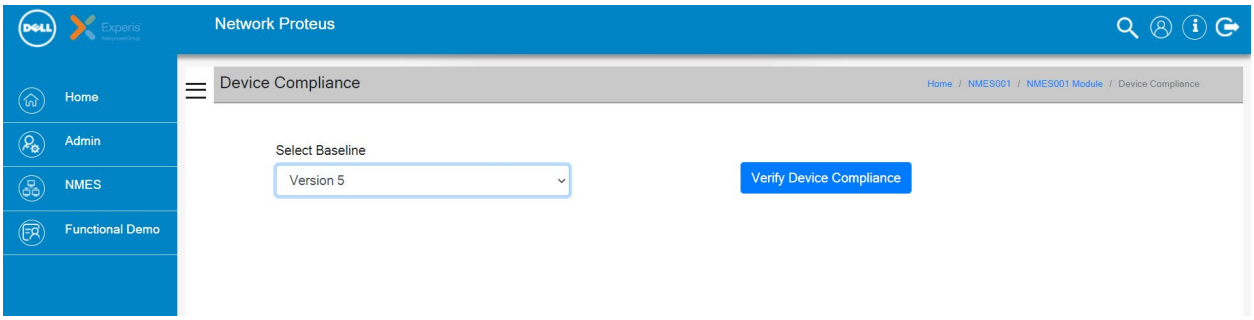

2. Click Verify Device Compliance to verify the device compliance based on the selected base line. Network Proteus displays the Device Compliance screen:

Internal Use - Confidential

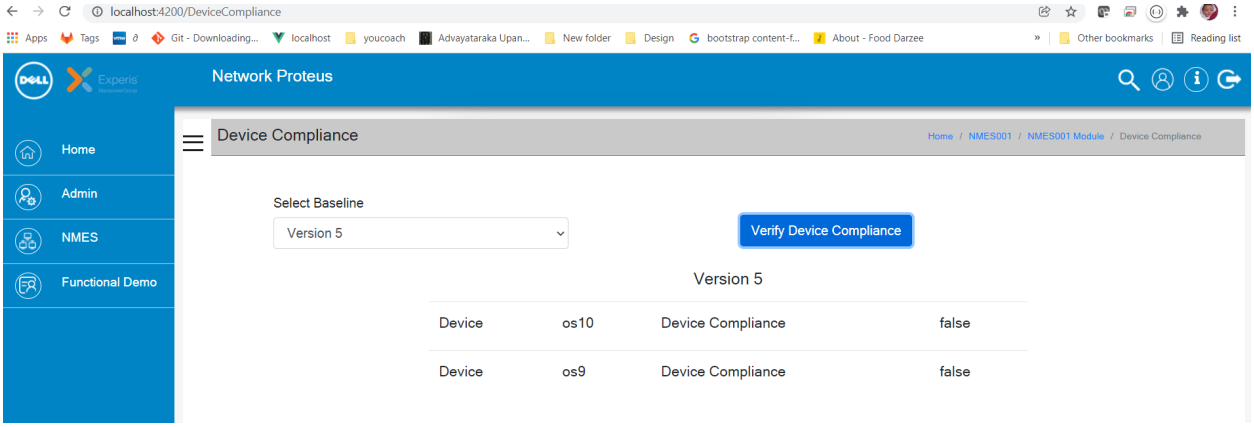

Push Baseline

You can push baseline configuration:

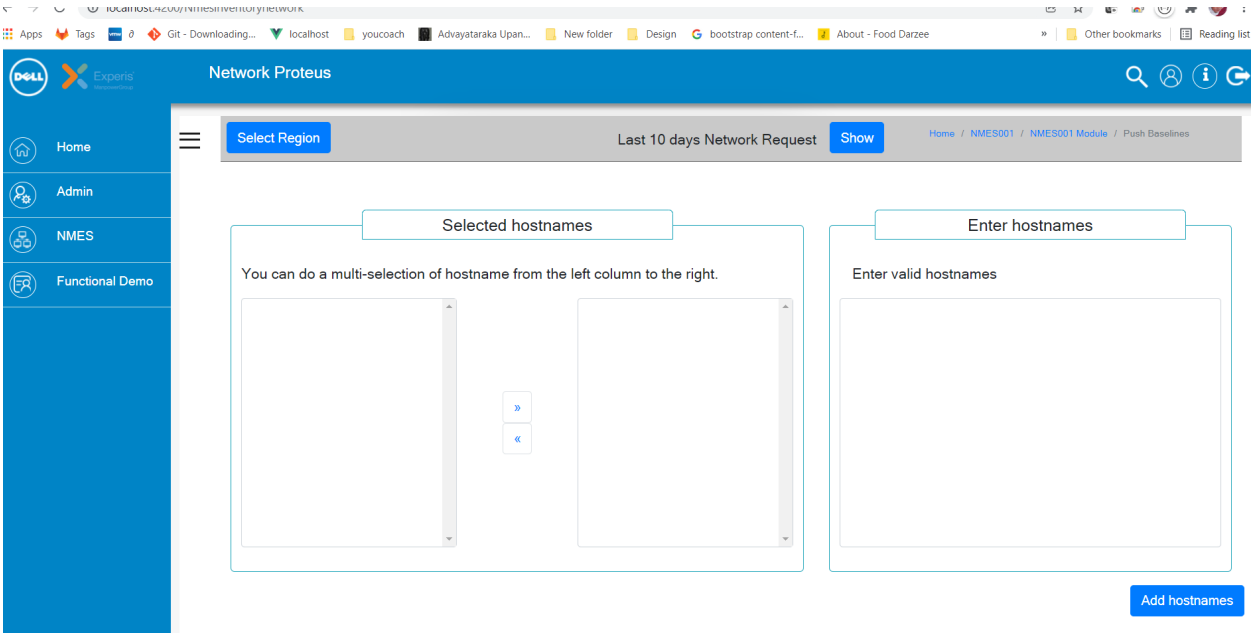

1. Click Select Region to select the location(s) for uploading the Hostnames.

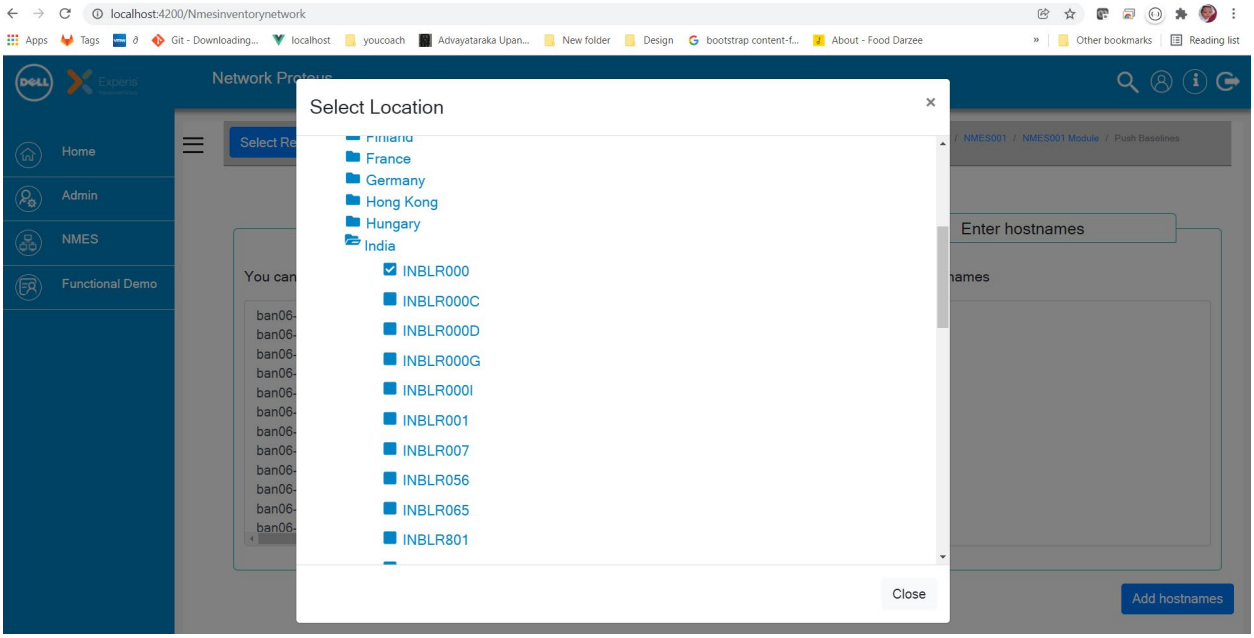

2. You can select multiple devices from multiple locations.
3. Enter the hostnames that belong to different OS types. Network Proteus has the capability to:
    a. Identify and categorize hostnames based on the OS types.
    b. Identify the invalid hostnames

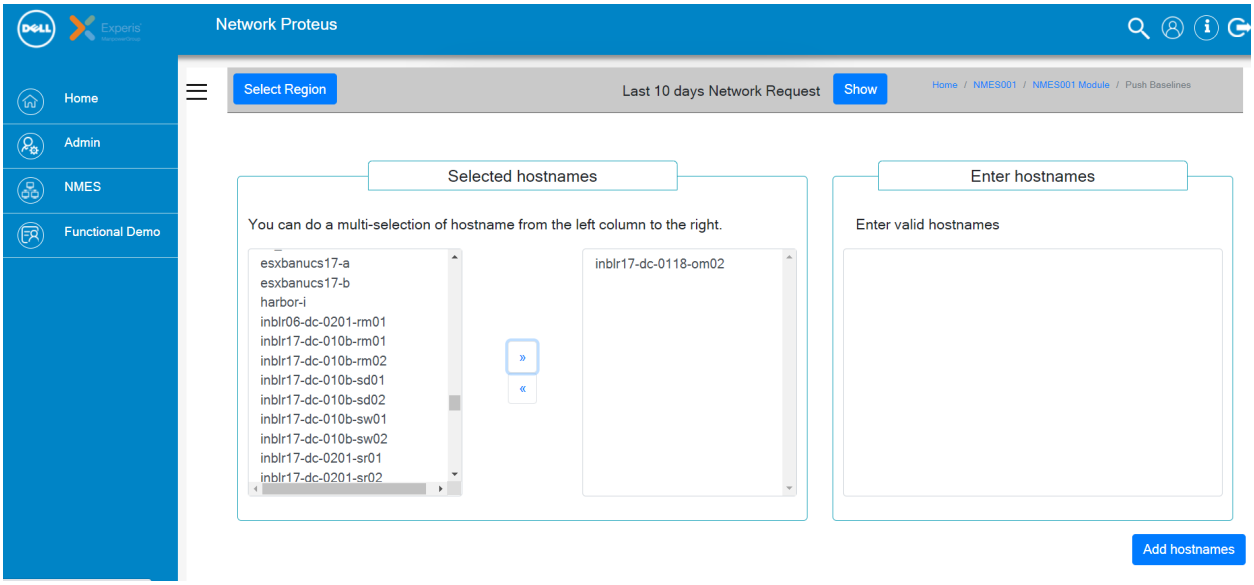

4. Click Add Host Names. Network Proteus displays the Create Pipeline window:

Internal Use - Confidential

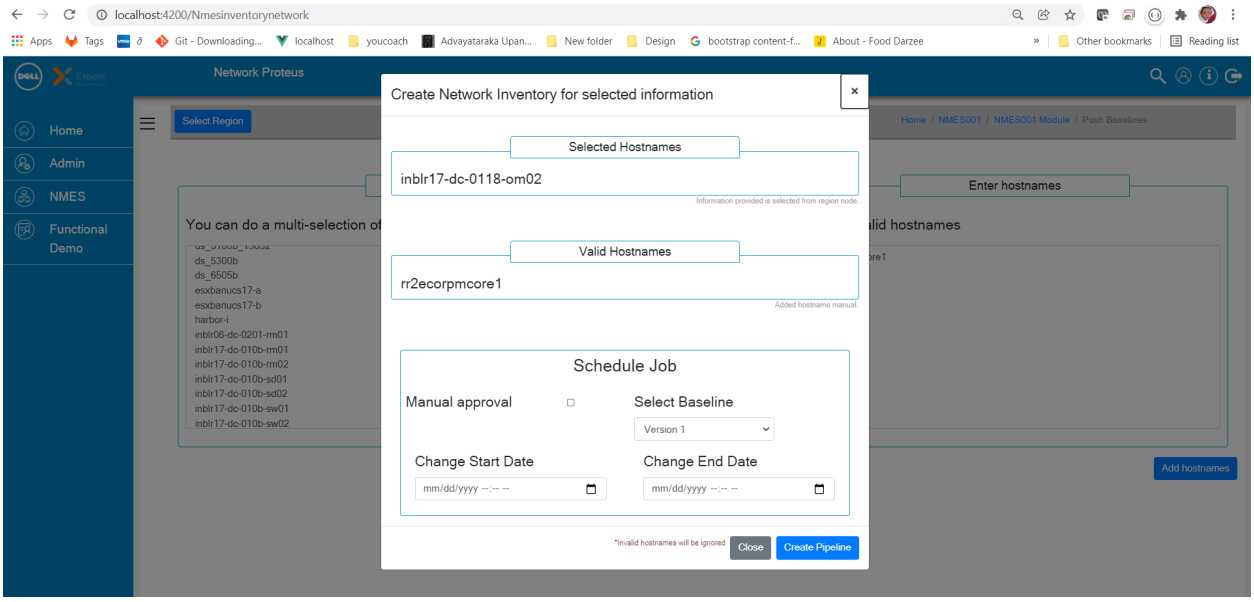

5. You can click Manual approval and schedule the change entering start and end date.
6. Click Create Pipeline. Network Proteus triggers the CI/CD pipeline:

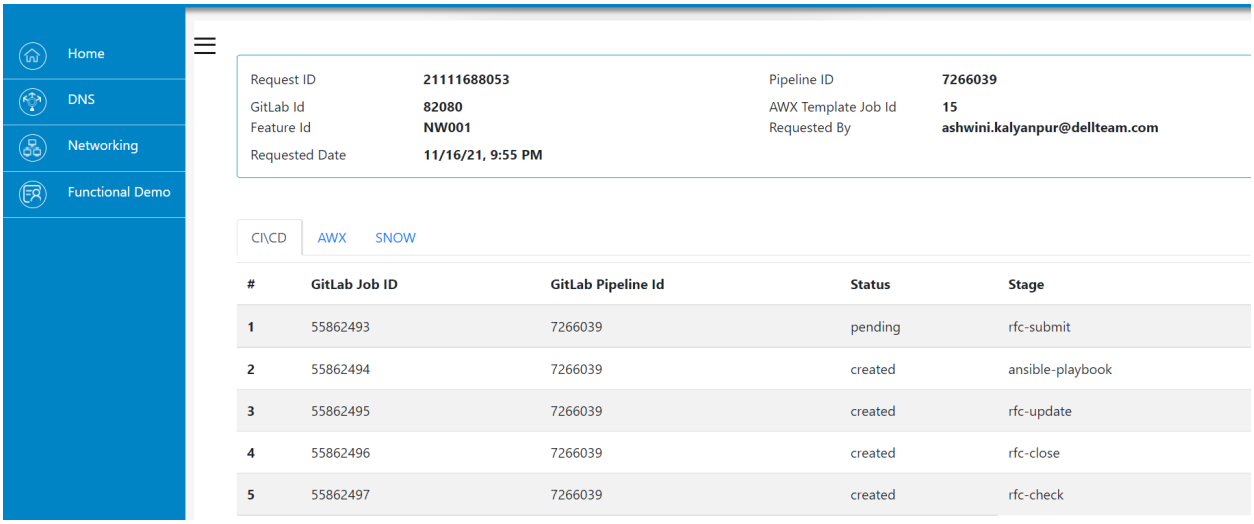

7. Network proteus schedules the change and executes the change in AWX:

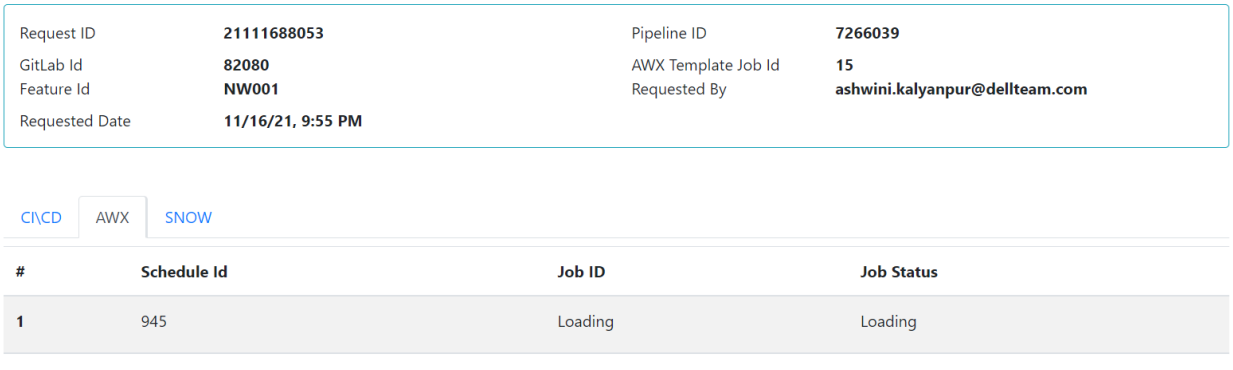

8. Network Proteus creates the change ticket in SNOW:

Request ID	**21111688053**	Pipeline ID	**7266039**
GitLab Id	**82080**	AWX Template Job Id	**15**
Feature Id	**NW001**	Requested By	**ashwini.kalyanpur@dellteam.com**
Requested Date	**11/16/21, 9:55 PM**		

CI\CD AWX SNOW

#	CR No	CR Status
1	"CHG0410347"	Started

9. Network Proteus provides the option to close the ticket or roll back to original configuration.

Request ID	**21111688053**	Pipeline ID	**7266039**
GitLab Id	**82080**	AWX Template Job Id	**15**
Feature Id	**NW001**	Requested By	**ashwini.kalyanpur@dellteam.com**
Requested Date	**11/16/21, 9:55 PM**		

CI\CD AWX SNOW

#	GitLab Job ID	GitLab Pipeline Id	Status	Stage
1	55862493	7266039	success	rfc-submit
2	55862494	7266039	success	ansible-playbook
3	55862495	7266039	success	rfc-update
4	55862496	7266039	manual	rfc-close
5	55862497	7266039	created	rfc-check

RFC Rollback or Close

Rollback Close RFC

Configuration Status

Original Config Changed Config

10. The user can download and view these configuration files:
    a. Original Configuration
    b. Changed Configuration
    c. Rolled Back Configuration

*A separate Rollback ID (AWX Job ID) will be generated for Rollback operation.

Log Out

To log out of Network Proteus, click icon on the top right corner of the main screen.

Internal Use - Confidential

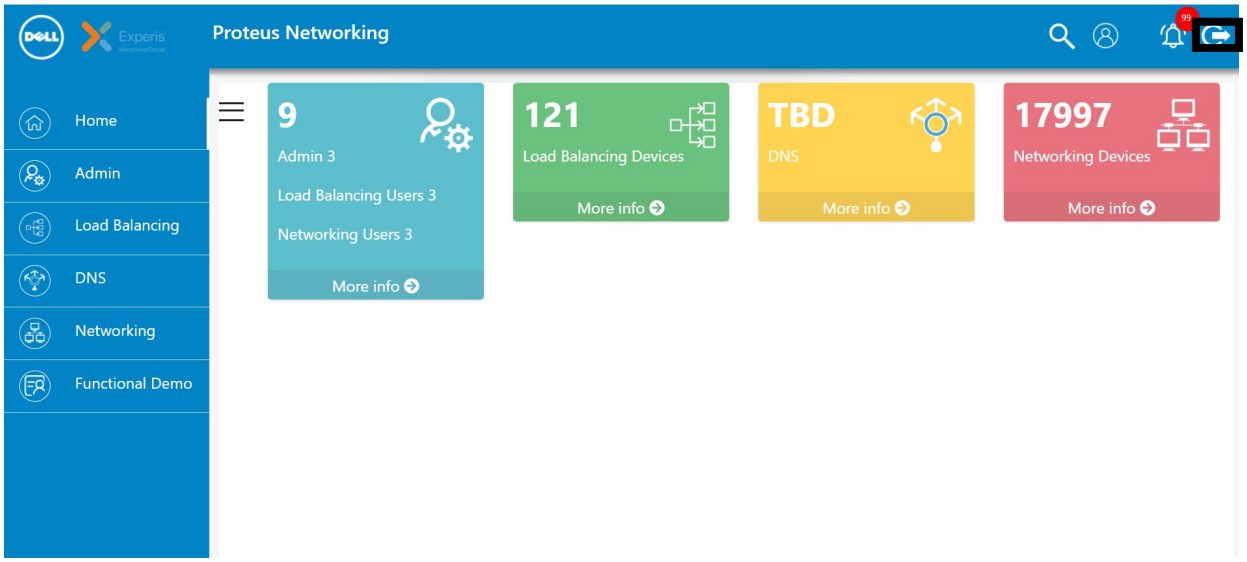
Proteus Networking
Home
Admin
Load Balancing
DNS
Networking
Functional Demo
9
Admin 3
Load Balancing Users 3
Networking Users 3
More info
121
Load Balancing Devices
More info
TBD
DNS
More info
17997
Networking Devices
More info