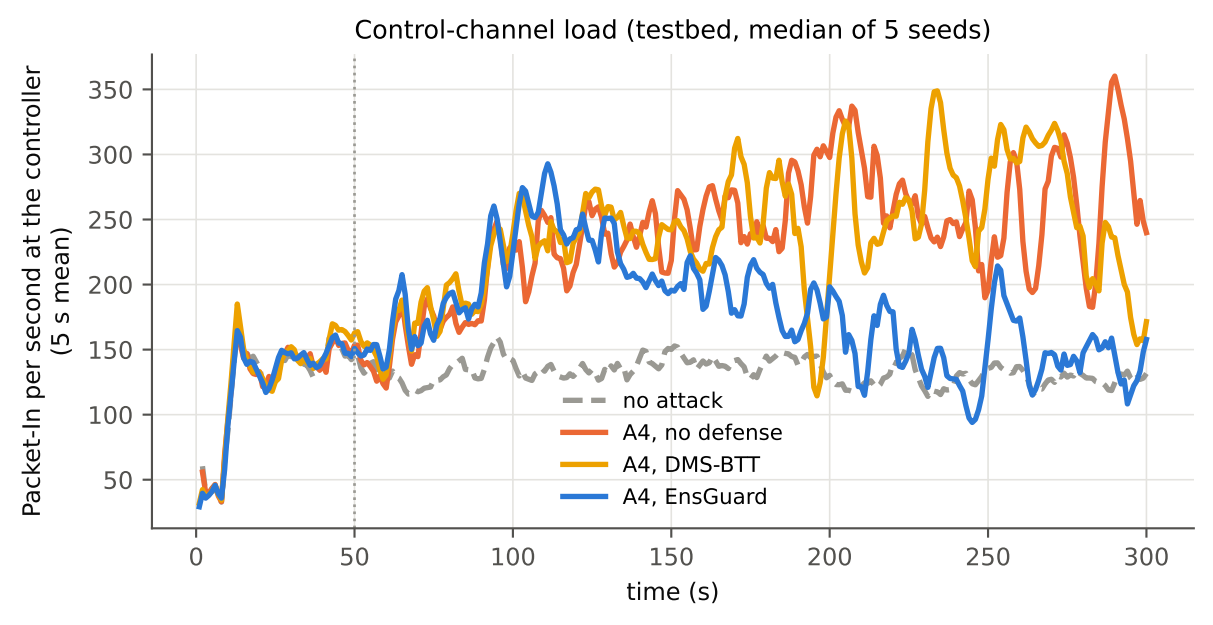
Control-channel load (testbed, median of 5 seeds)
Packet-In per second at the controller
(5 s mean)
350
300
250
200
150
100
50
0
50
100
150
200
250
300
time (s)
no attack
A4, no defense
A4, DMS-BTT
A4, EnsGuard