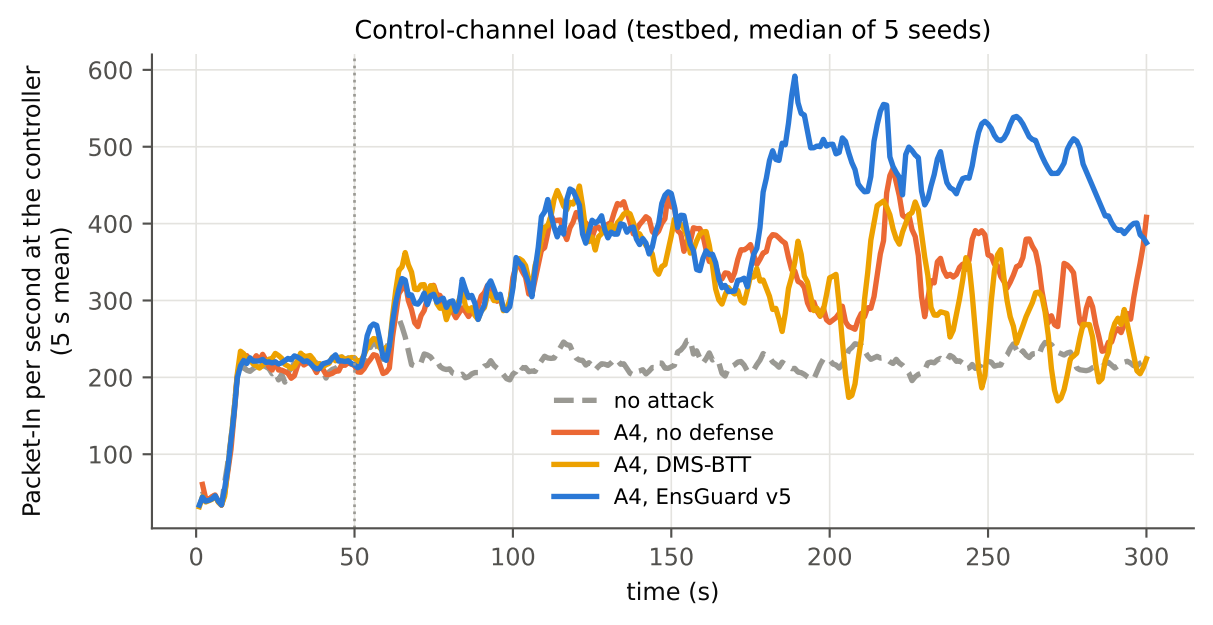
Control-channel load (testbed, median of 5 seeds)
Packet-In per second at the controller
(5 s mean)
600
500
400
300
200
100
0
50
100
150
200
250
300
time (s)
no attack
A4, no defense
A4, DMS-BTT
A4, EnsGuard v5