


MARS ROBOT CANopen MAP

Installed bus: 500 kbit/s

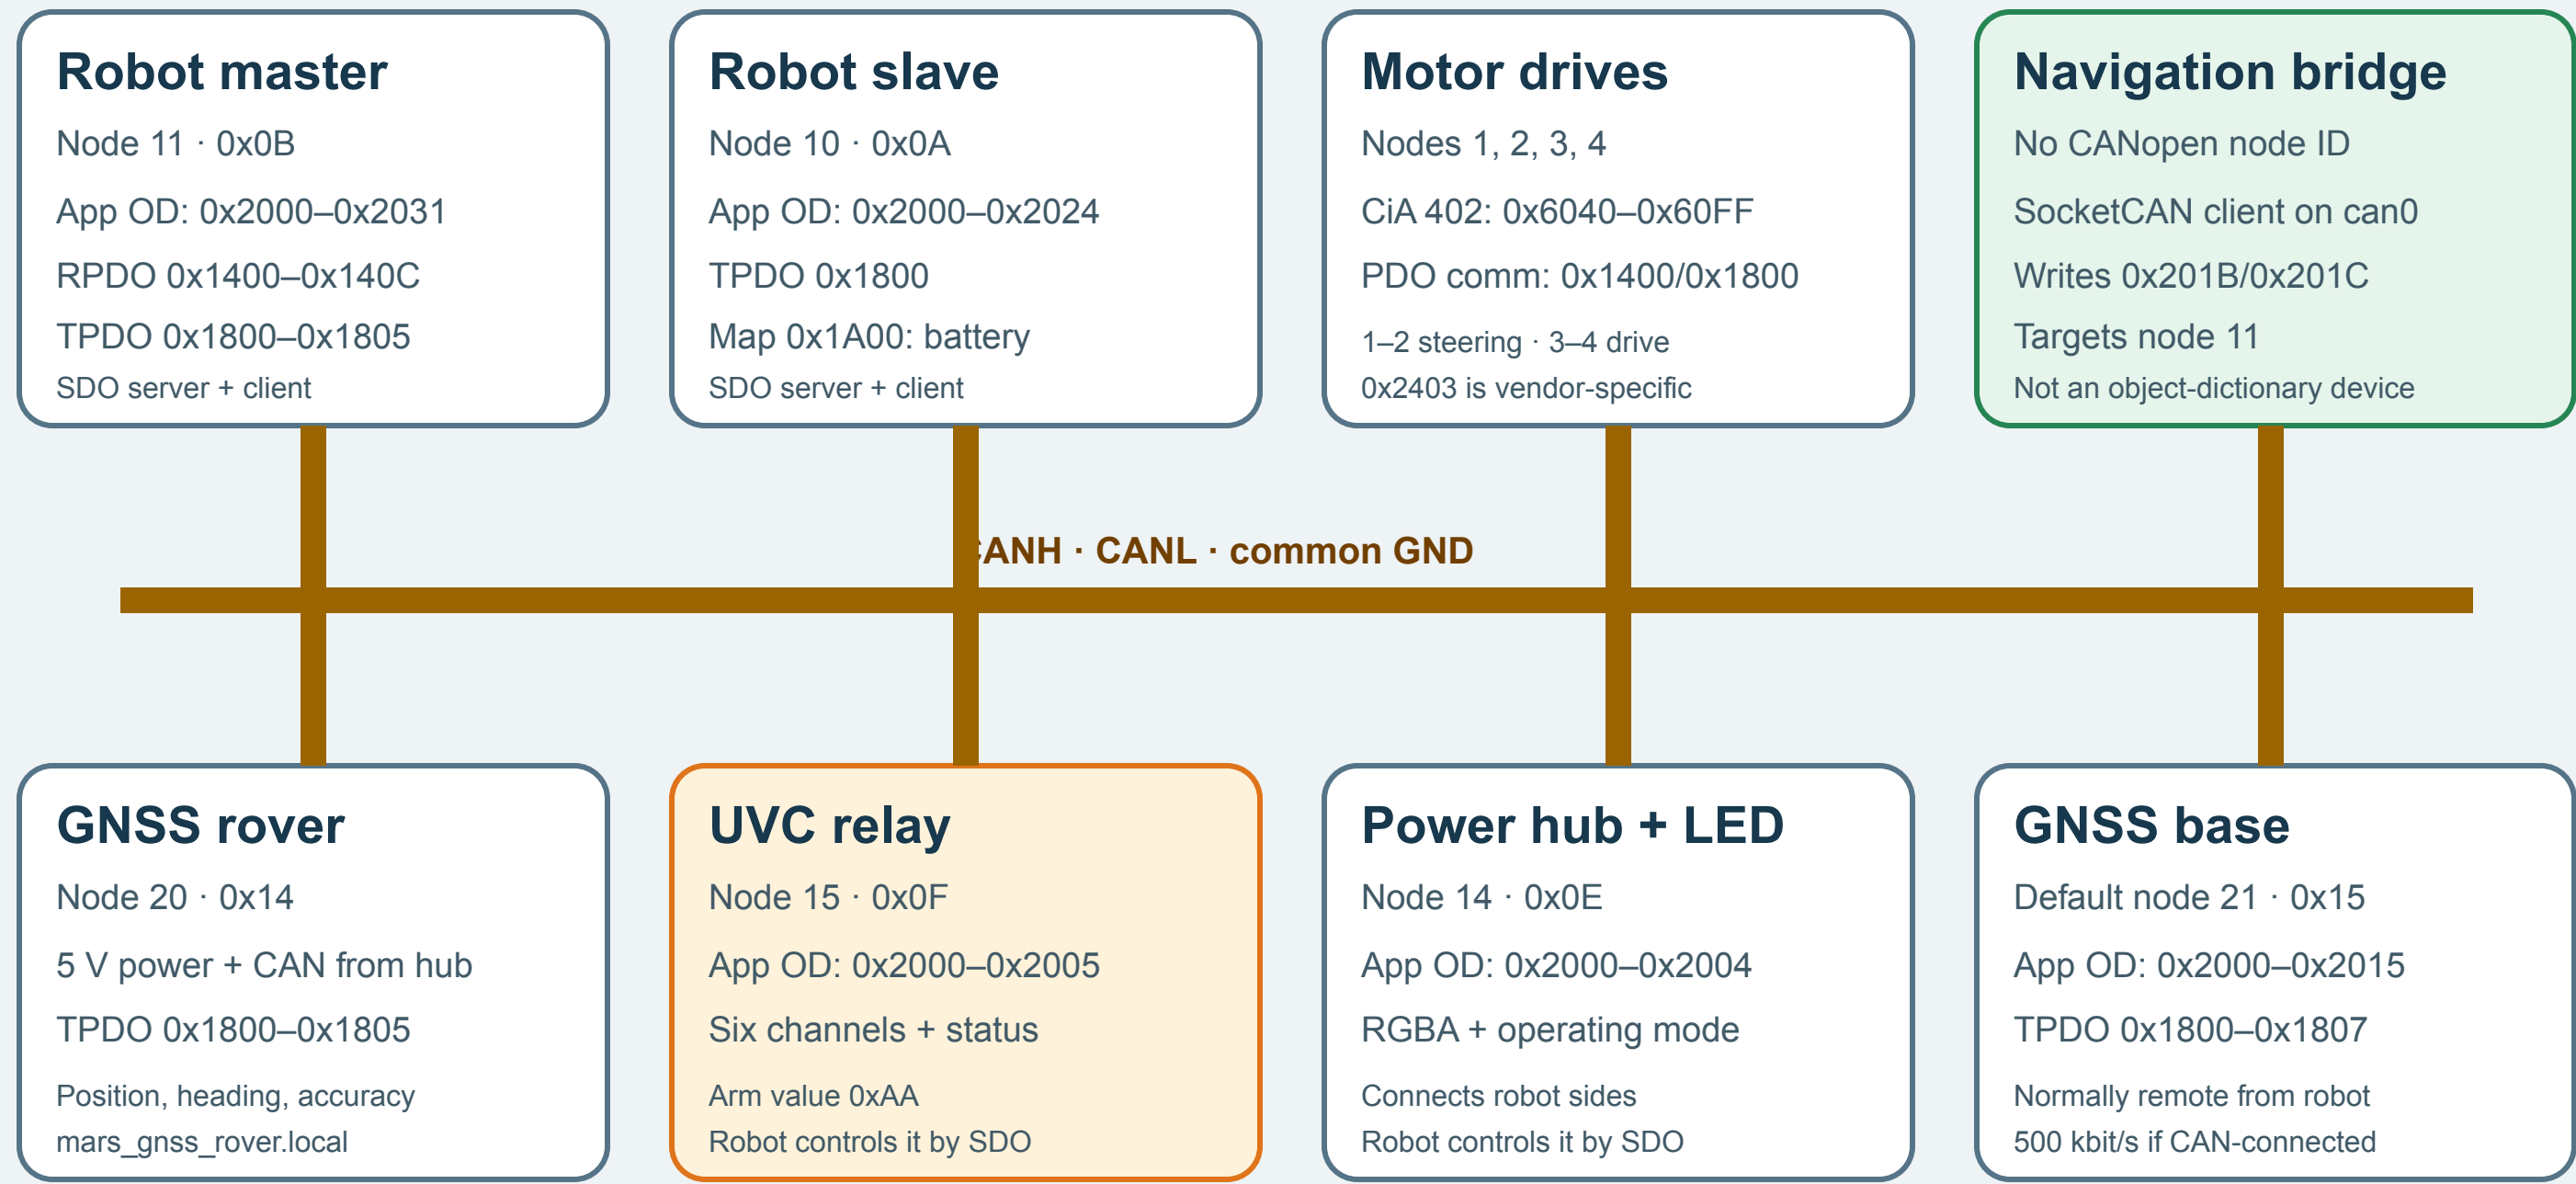

All CANopenNode devices also implement communication/service objects in 0x1000–0x1FFF. Use the installed EDS/XDD and live values for commissioning.