



RTK GPS base and robot rover — numbered field setup

1 Choose base point

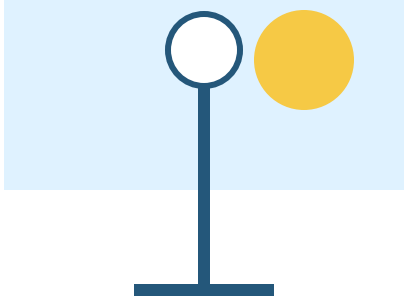

Stable · open sky · never move

2 Connect and power



GNSS + LoRa antennas first
Then switch power ON

3 Open base page

mars_gnss_base_xxxxxx
192.168.10.1



START SURVEY


4 Wait for valid survey



300 sec

VALID

5 Power robot rover

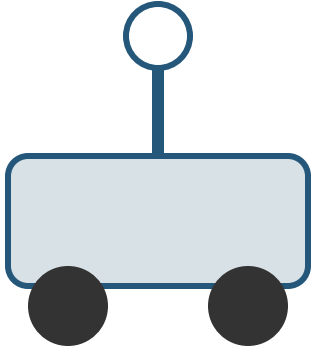

Antenna upright · clear sky

6 Open rover page

mars_gnss_rover_xxxxxx
192.168.10.1



Select LoRa or NTRIP
Check correction age

7 Wait for RTK

RTK FLOAT

RTK

8 Verify navigation data

Fix: RTK
Age: CURRENT
CAN: ONLINE
Position: FRESH

Ready for mission planning