


POWER HUB · PORTS AND CONNECTED DEVICES

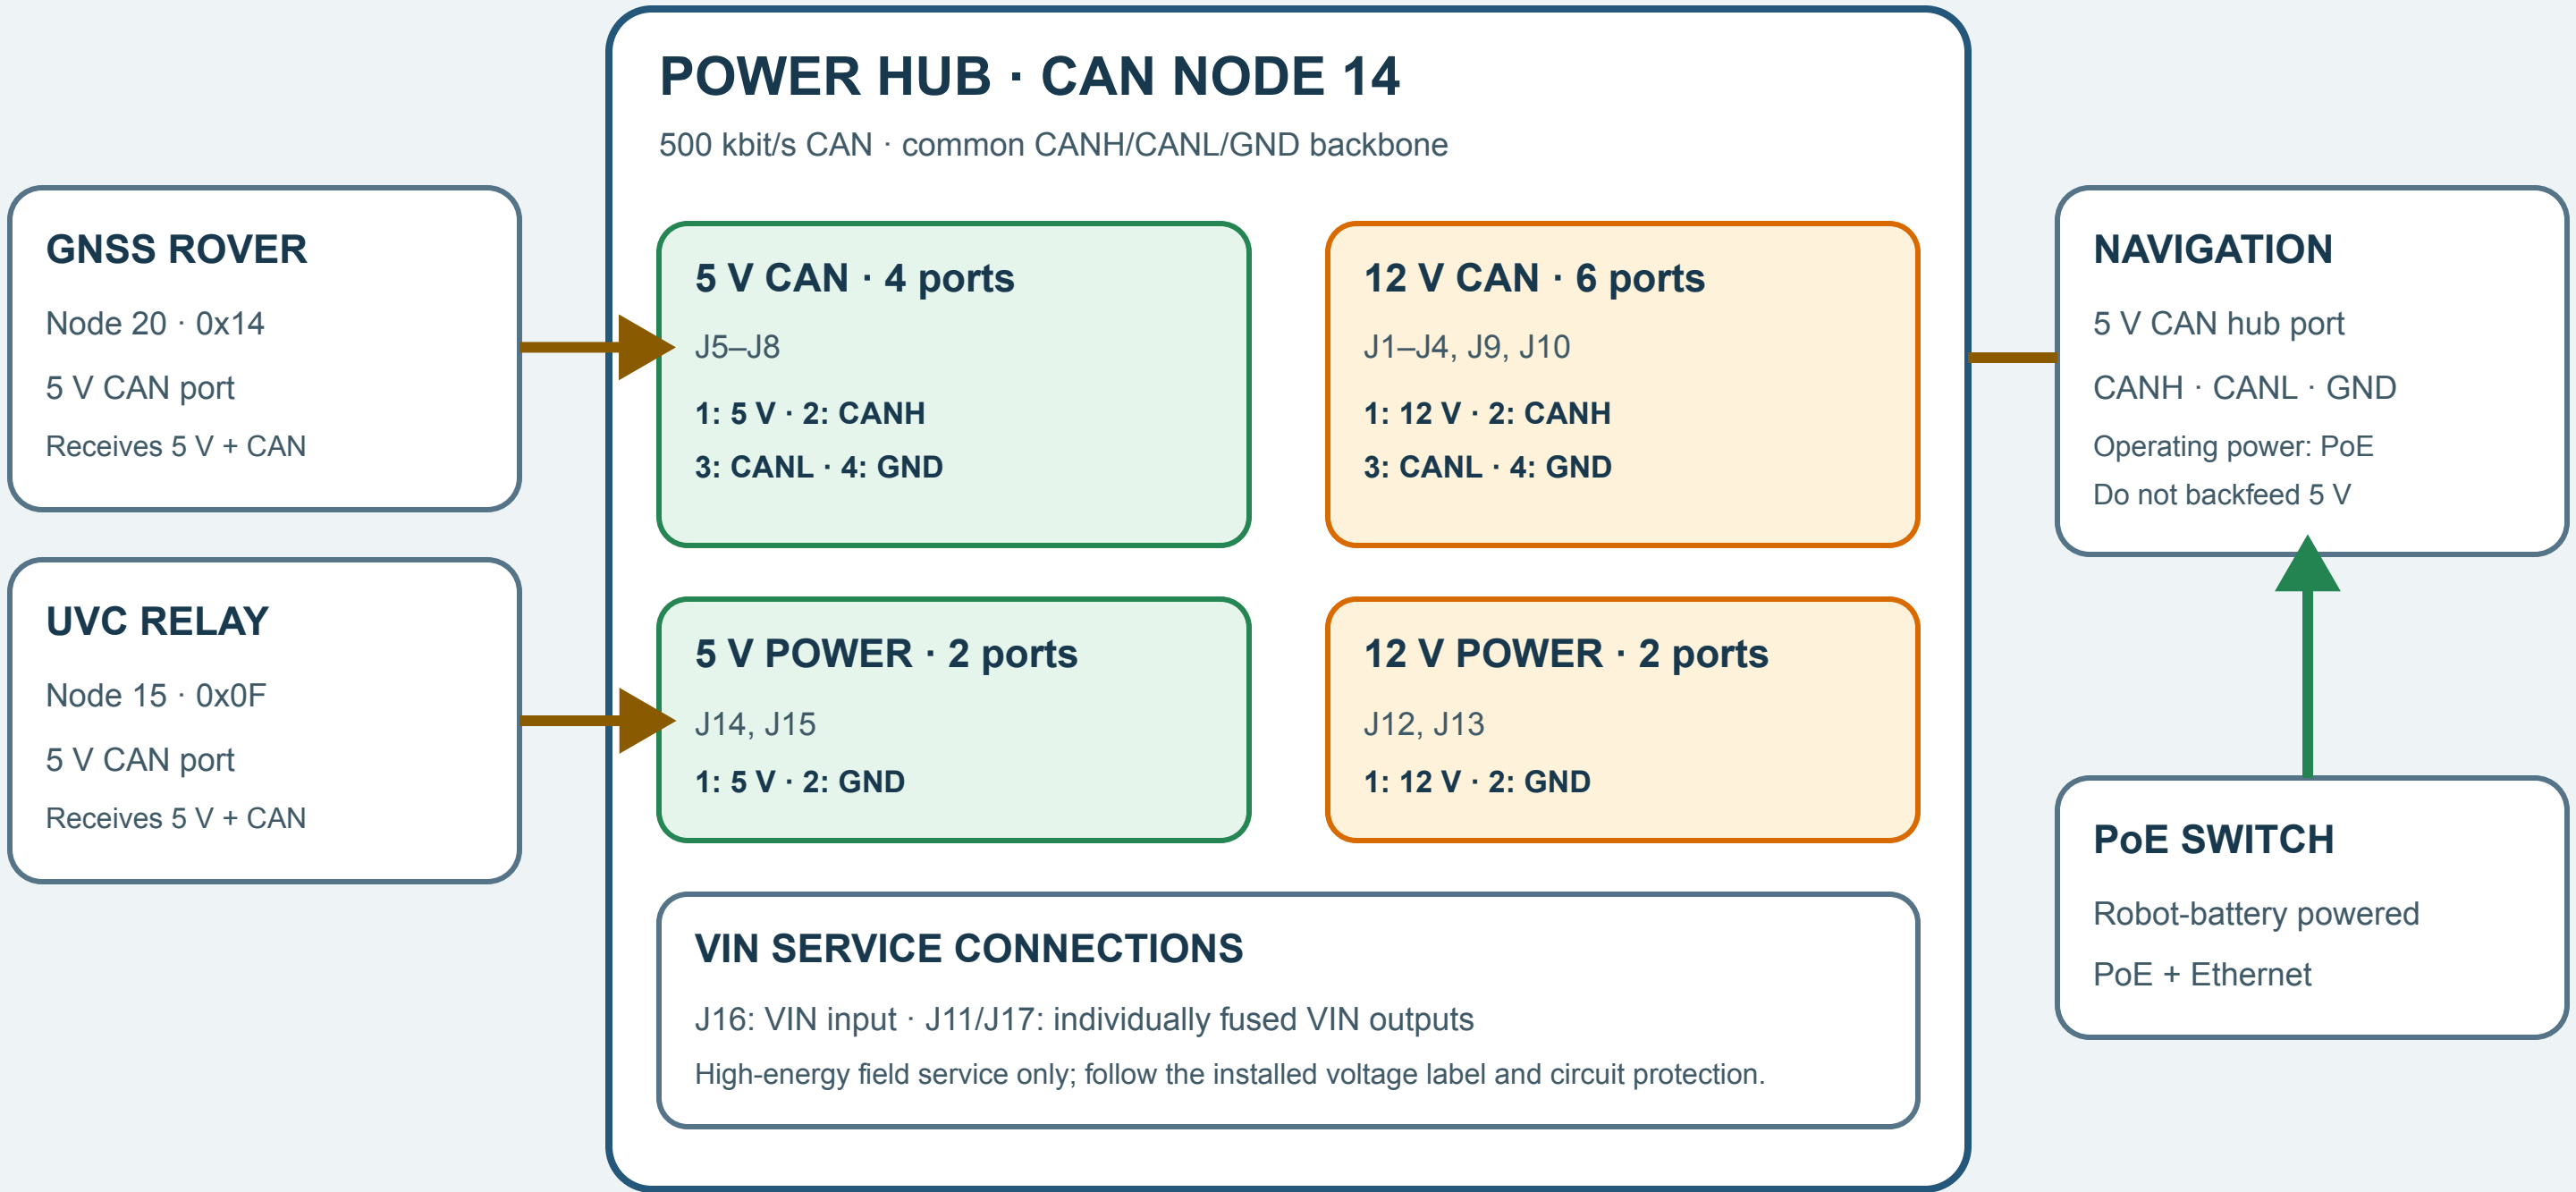

CONNECTION RULE

Match the printed voltage label before mating a connector. A 12 V CAN port and a 5 V CAN port carry the same CAN signals but different pin-1 supply voltage.
Never select a port by connector appearance alone. Verify voltage, keying, pinout and device power requirements.