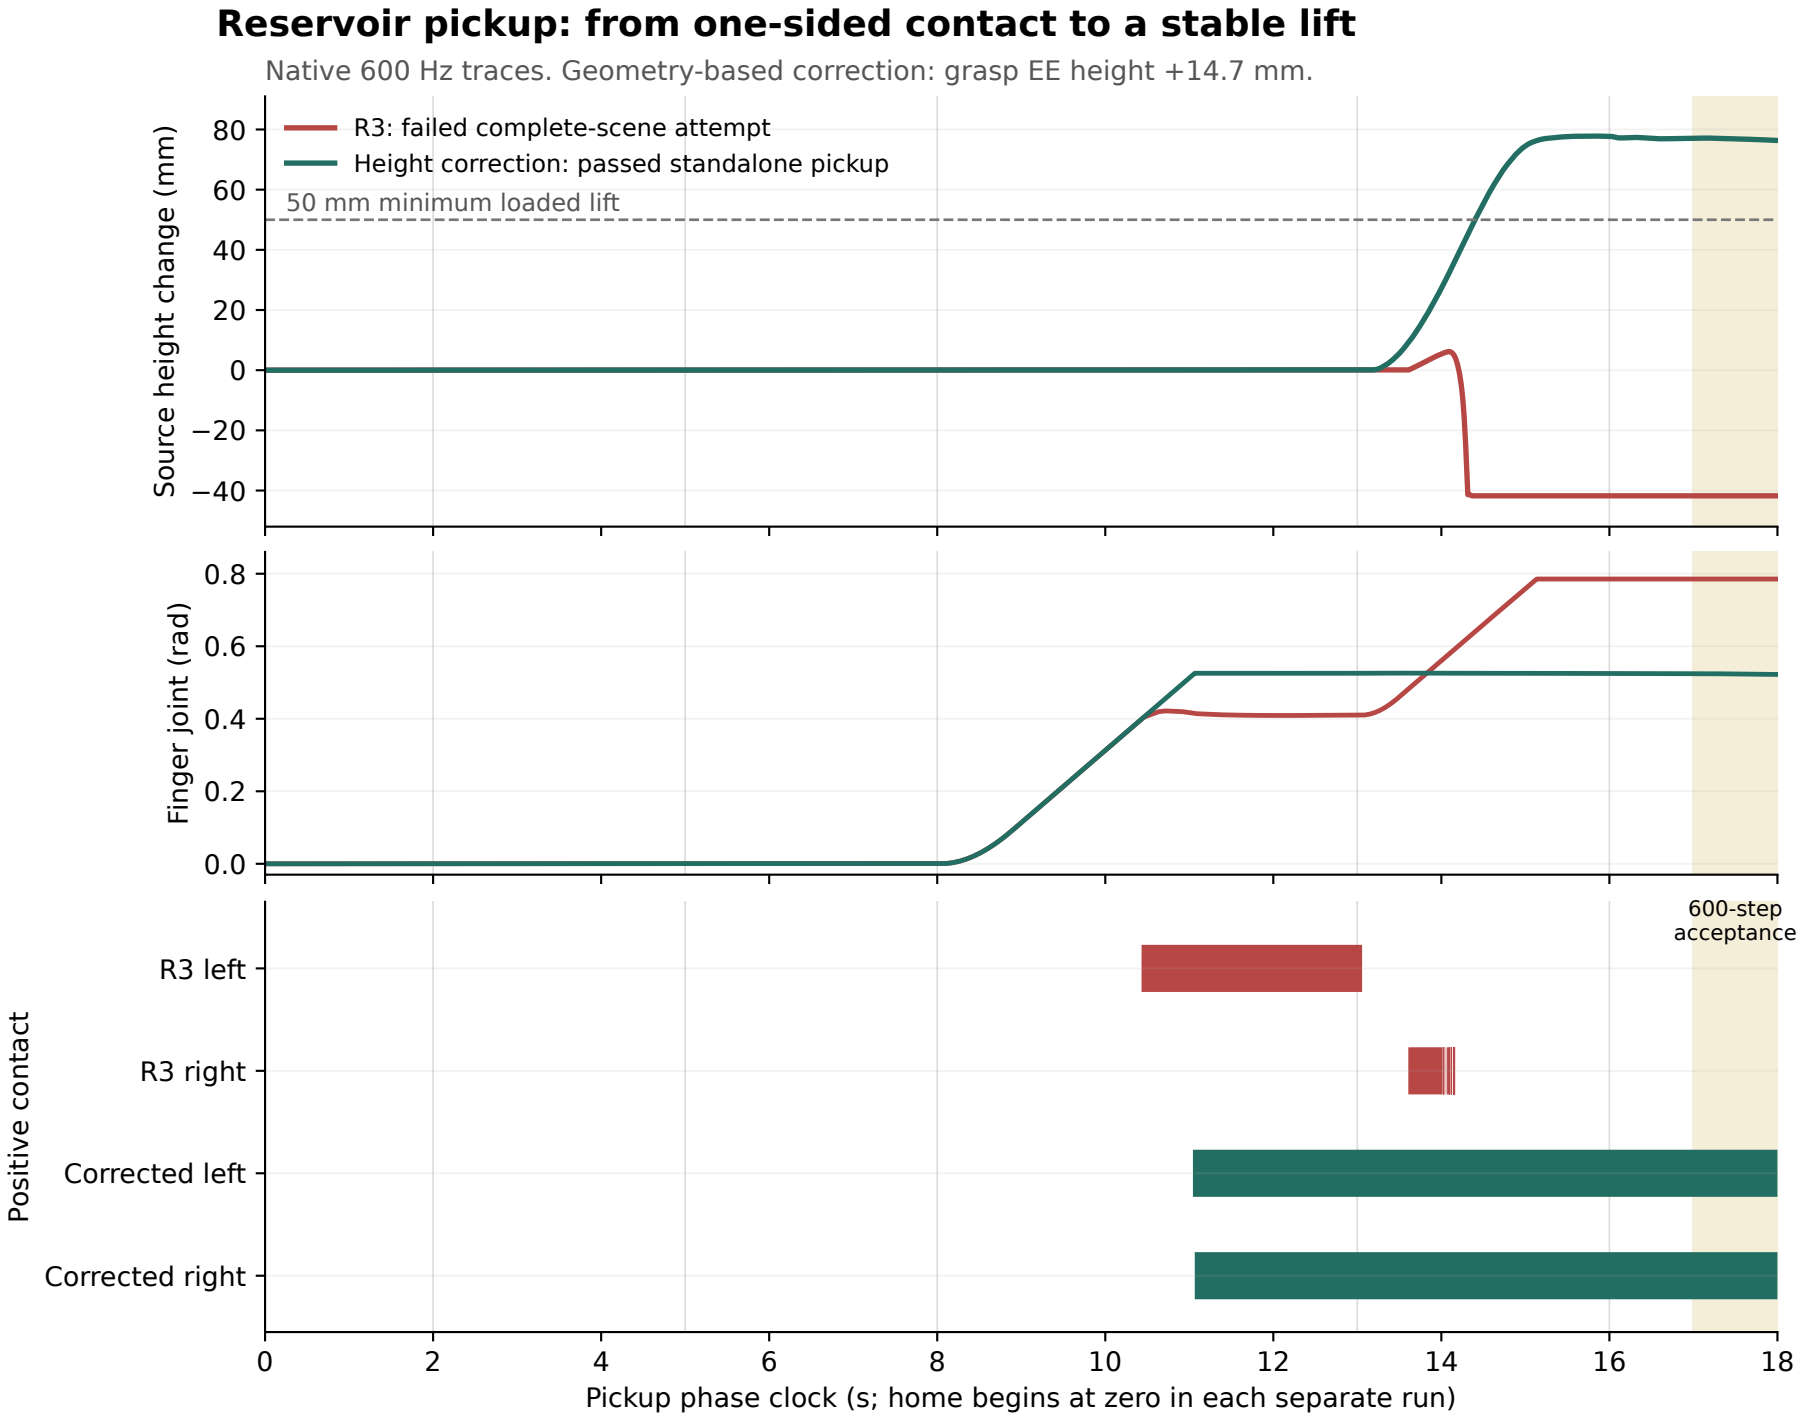

Reservoir pickup: from one-sided contact to a stable lift
Native 600 Hz traces. Geometry-based correction: grasp EE height +14.7 mm.
R3: failed complete-scene attempt
Height correction: passed standalone pickup
50 mm minimum loaded lift
Source height change (mm)
80
60
40
20
0
−20
−40
Finger joint (rad)
0.8
0.6
0.4
0.2
0.0
600-step acceptance
Positive contact
R3 left
R3 right
Corrected left
Corrected right
0
2
4
6
8
10
12
14
16
18
Pickup phase clock (s; home begins at zero in each separate run)