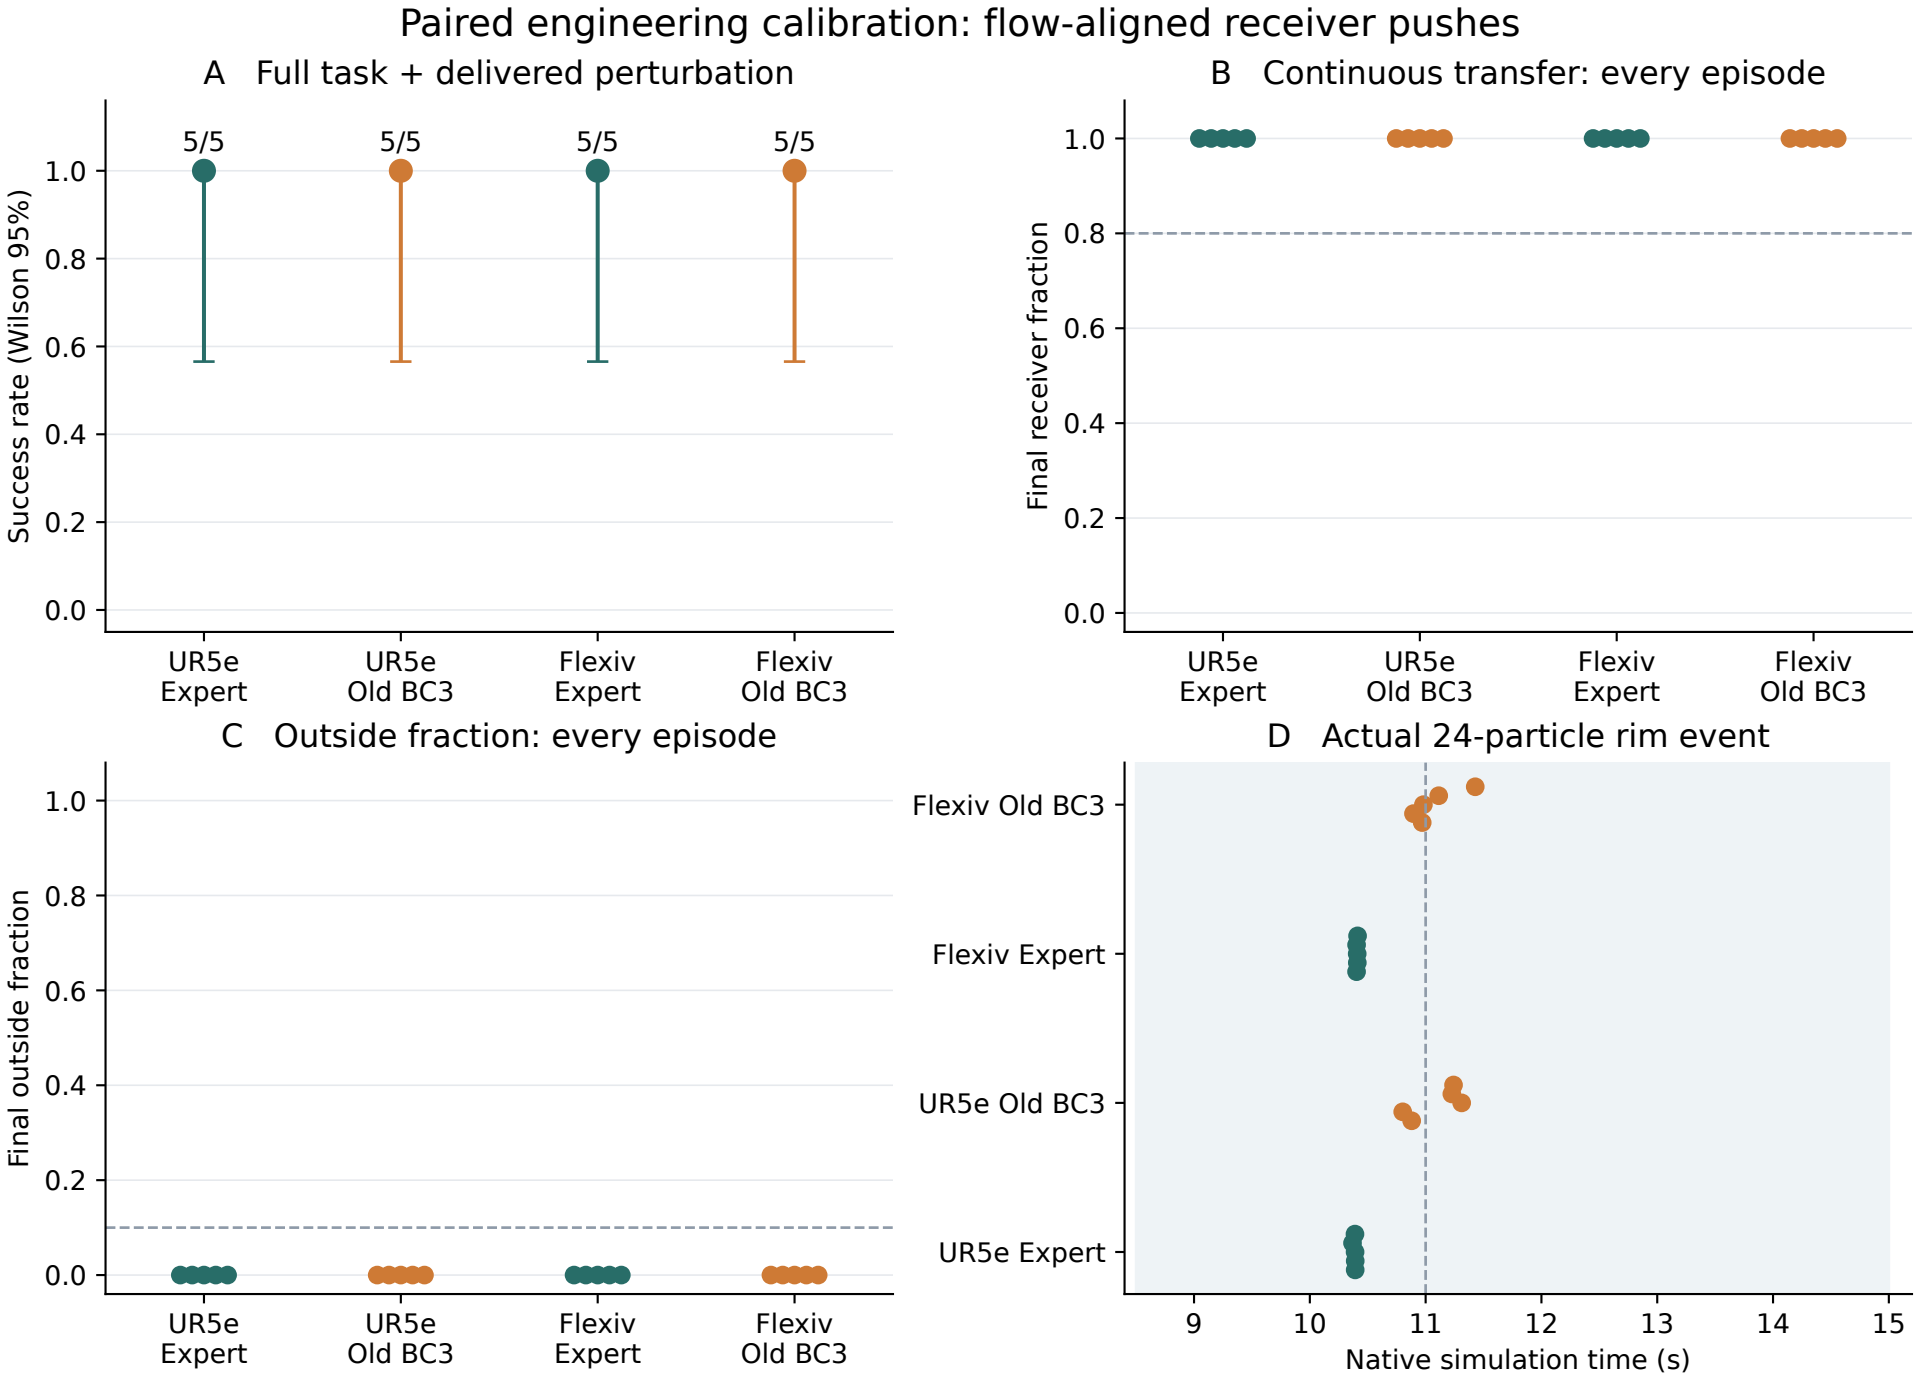
Paired engineering calibration: flow-aligned receiver pushes
A Full task + delivered perturbation
Success rate (Wilson 95%)
5/5
5/5
5/5
5/5
1.0
0.8
0.6
0.4
0.2
0.0
UR5e Expert
UR5e Old BC3
Flexiv Expert
Flexiv Old BC3
B Continuous transfer: every episode
Final receiver fraction
C Outside fraction: every episode
Final outside fraction
D Actual 24-particle rim event
Flexiv Old BC3
Flexiv Expert
UR5e Old BC3
UR5e Expert
9
10
11
12
13
14
15
Native simulation time (s)