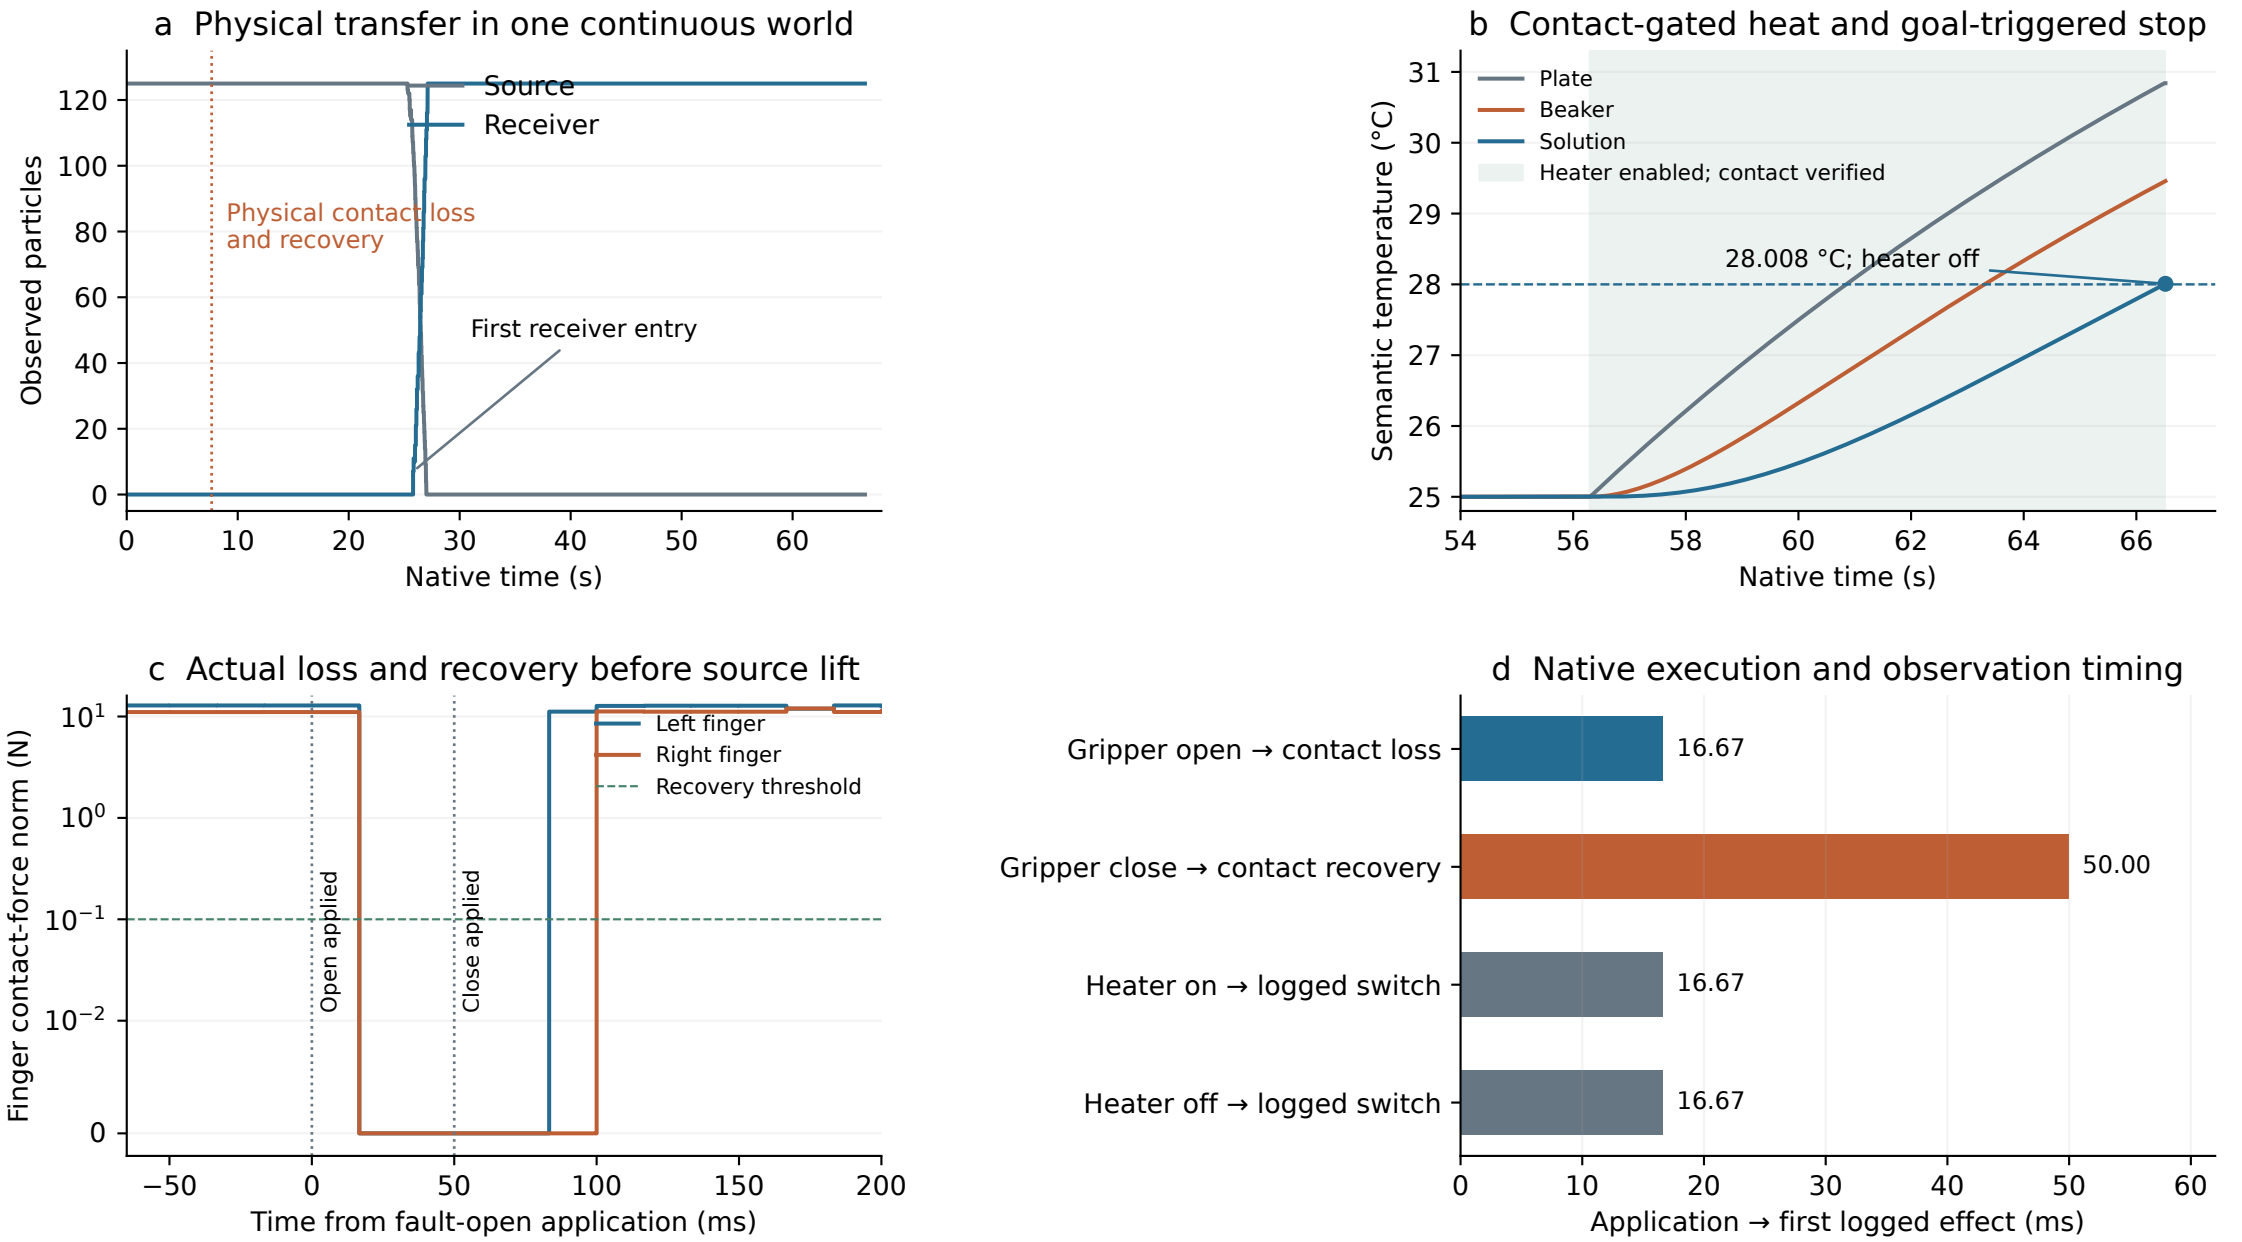

One known-pose local scripted episode; three prior failures retained. PhysX PBD display-point observer and declared N07 effective thermal model.
60 Hz control observations; heater bars are software switch observations, not hardware thermal latency. Contact recovered while the cup was table-supported.
No world reset, object-pose rewriting, attachments or new physics in this figure. Wall runtime includes the 318.73 s resource pause.