

Grungy Times: The Euler-Lagrange Equations

Anshul Singhvi,^{*} Bethan Cordone,[†] Pruthi Patil,[‡] Yecheng Ma,[§] and YuXuan Liu[¶]

Bard College at Simon's Rock

(Dated: May 3, 2020)

The Euler-Lagrange equations are ewwler. Here's what we can do to make them...kewwler.

I. INTRODUCTION

For systems with one degree of freedom, the *action integral*, called $J(y)$, can be expressed as:

$$J(y) = \int_0^T F(t, y, \dot{y}) dt \quad (1)$$

To solve for the equations of motion of a mechanical system, we can attempt to find function $y(t)$ which is a *stationary point* of the action integral; this means that the trajectory which $y(t)$ takes conserves the quantity within the action integral. This function must satisfy several constraints; it must satisfy the boundary conditions $y(a) = A$, and $y(b) = B$, and it must have at least two continuous derivatives.

It's useful to examine the behaviour around our proposed solution, to see whether it really is a stationary point. This method is known as the *calculus of variations*. Consider a perturbation to the initial function, of magnitude $0 < \epsilon \ll 1$:

$$\bar{y}(t) = y(t) + \epsilon \cdot \eta(t)$$

$\eta(t)$ is called the *perturbation function*; it is simply a function which obeys $\eta(a) = 0$ and $\eta(b) = 0$. Now, we can observe the behaviour of the action integral as a function of ϵ :

$$\phi(\epsilon) = J(y + \epsilon \cdot \eta) = \int_0^T F(t, y + \epsilon\eta, \dot{y} + \epsilon\dot{\eta}) dt$$

We can evaluate the *derivative* of ϕ at 0. We know, however, that there must be a stationary point at $\epsilon = 0$, which leads us to the inevitable conclusion that we must relinquish ourselves to the greedy clutches of algebra, and evaluate $\frac{d\phi}{d\epsilon}$ at 0.

After some simplification, this evaluation becomes:

$$\int_a^b \left[\frac{\partial F}{\partial y}(x, \bar{y}, \bar{y}') - \frac{\partial^2 F}{\partial x \partial y'}(x, \bar{y}, \bar{y}') \right] \eta dx = 0$$

which means that the multiplicand of η must be 0. Therefore,

$$\frac{\partial F}{\partial y}(x, y, y') - \frac{\partial^2 F}{\partial x \partial y'}(x, y, y') = 0$$

which is the Euler-Lagrange equation.

For our mechanical systems, the value being integrated in $J(y)$ is the kinetic energy minus the potential energy: $K - V$. In the physical sciences, this is known as the Lagrangian, and is usually denoted by \mathcal{L} .

Thus, the solution to the action integral is the Euler-Lagrange equation:

$$\frac{\partial}{\partial y} \left[\mathcal{L}(t, y, \dot{y}) \right] - \frac{\partial^2}{\partial x \partial \dot{y}} \left[\mathcal{L}(x, y, \dot{y}) \right] = 0 \quad (2)$$

^{*} Also at Applied Physics Department, Columbia University.; asinghvi17@simons-rock.edu

[†] Also at Applied Physics Department, Columbia University.; bcordone17@simons-rock.edu

[‡] ppatil18@simons-rock.edu

[§] Also at Operations Research Department, Columbia University.; yml17@simons-rock.edu

[¶] Also at Applied Physics Department, Columbia University.; yliu17@simons-rock.edu

II. FALLING BODIES

Any body falling sufficiently close to the surface of the Earth is subject to an approximately constant gravitational force $F = mg$, assuming a perfectly spherical Earth, and that the object's height above the surface of the Earth is much less than its radius. Its trajectory is parameterized by a function $y(t)$ which expresses its height relative to the surface of the Earth. We concern ourselves here with a trajectory going from $t = 0, y_0 = y(0)$ to $t = T, y = y(T)$.

The kinetic energy of a falling body is simply $T = \frac{1}{2}m\dot{y}^2$. Its gravitational potential energy is the integral of the gravitational force from its origin to its destination; assuming the surface of the Earth as the origin ($y = 0$), $V = mgy$.

We have defined an isolated system; as such, in the confines of the system, there can be no change in the net amount of energy. The energy can be represented $E_{tot} = T - V$, which expands to $E_{tot} = \frac{1}{2}m\dot{y}(t)^2 - mgy(t)$. This function $E_{tot}(t, y, \dot{y})$ is what we need to conserve.

Thus, we can define the action integral J as follows:

$$J = \int_0^T \frac{1}{2}m\dot{y}(t)^2 - mgy(t) dt$$

By the Euler-Lagrange constraint, then,

$$\frac{\partial}{\partial y} [E_{tot}(t, y, \dot{y})] - \frac{\partial^2}{\partial t \partial y} [E_{tot}(t, y, \dot{y})] = 0$$

We can evaluate these partial derivatives, of course, and this evaluation gives us the equation:

$$\begin{aligned} m\ddot{y}(t) &= -mg \\ \Rightarrow \ddot{y}(t) &= -g \end{aligned}$$

This can now be integrated with respect to time.

$$\begin{aligned} \iint \ddot{y}(t) dt dt &= \iint -g dt dt \\ \Rightarrow y(t) &= \iint -g dt dt \\ \Rightarrow y(t) &= \int -gt + C_1 dt \\ \Rightarrow y(t) &= -\frac{1}{2}gt^2 + C_1t + C_2 \end{aligned}$$

The constants C_1 and C_2 are really just the initial velocity and position of the object, respectively. This function describes a parabolic trajectory, which we know to be true.

III. THE BRACHISTOCHRONE PROBLEM

The brachistochrone curve is simply the curve along which a frictionless particle will slide in the minimum time. Brachistochrone trajectories are especially interesting in the context of space travel, since they provide the most efficient trajectories with which to traverse long distances.

The problem is, specifically, to find the curve $y(x)$ between points $y(a) = A$ and $y(b) = B$, along which a particle will slide in the minimum time.

Here, we will trace out Johann Bernoulli's solution to the brachistochrone problem, and justify all the steps he took.

We begin with the fundamental theorem of calculus, which shows that:

$$T = \int_0^t dt$$

Next, we proceed to a chain rule equality. Though this is perhaps unpalatable to most mathematicians, it is trivial to show through the chain rule that $\frac{dt}{ds} ds = dt$:

$$\Rightarrow \int_0^T dt = \int_0^L \frac{dt}{ds} ds$$

However, there is an important simplification we can make here. Velocity is defined as $v = \frac{ds}{dt}$, and a simple inversion shows that $\frac{dt}{ds} = \frac{1}{v}$:

$$\int_0^L \frac{dt}{ds} ds = \int_0^L \frac{1}{v} ds$$

Let us assume a coordinate system in which the particle begins at the origin, and the positive y direction points upwards, against the direction of gravity. We can now find the velocity of the particle as a function of its position, by using the principle of energy conservation.

Additionally, let $h = 0$ be the initial position of the particle. We know that the gravitational potential energy is simply $V_g = mgh$, and that the kinetic energy in the absence of rotation or friction is $T = \frac{1}{2}mv^2$. Thus,

$$\begin{aligned} mgh &= -mgy + \frac{1}{2}mv^2 \\ \Rightarrow mgy &= \frac{1}{2}mv^2 \\ \Rightarrow v &= \sqrt{2gy} \end{aligned}$$

Now, we can substitute this back into our original integral,

$$\int_0^L \frac{1}{v} ds = \int_0^L \frac{1}{\sqrt{2gy}} ds$$

However, it's important to remember that here, ds is actually just $\sqrt{dx^2 + dy^2}$. This can then be algebraically simplified to $dx\sqrt{1 - \left(\frac{dy}{dx}\right)^2}$. Substituting this into our integral,

$$\int_0^L \frac{1}{\sqrt{2gy}} ds = \sqrt{\frac{1}{2g}} \int_a^b \sqrt{\frac{1 + y'^2}{y}} dx$$

This is simply integrating over the x domain of the path, as opposed to the y domain.

We can now solve for the Euler-Lagrange equations of $\sqrt{\frac{1}{2g}} \int_a^b \sqrt{\frac{1 + y'^2}{y}} dx$:

$$\begin{aligned} F_y &= -\sqrt{\frac{1 + (y')^2}{8g}} y^{-\frac{3}{2}} \\ F_{y'} &= \frac{y}{\sqrt{2gy}\sqrt{1 + (y')^2}} \\ F_{y'x} &= \frac{\frac{1}{2}y'^2 [y(1 + y'^2)]^{-1/2} (2y''y + y'^2 + 1) + y''(\sqrt{y}\sqrt{1 + y'^2})}{\sqrt{2gy}(1 + y'^2)} \end{aligned}$$

We know that $F_{y'x} = F_y$. Therefore,

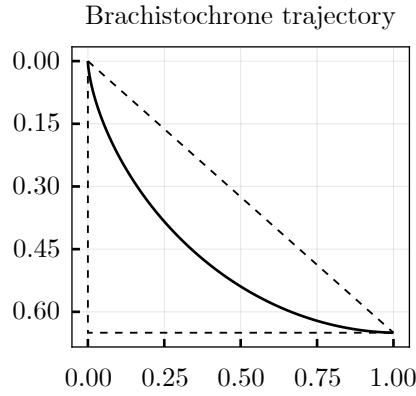


FIG. 1. The brachistochrone trajectory from $(0, 0)$ to $(1, -0.65)$. The dashed lines represent linear, slower paths.

$$\sqrt{\frac{1+y'^2}{8g}} y^{-\frac{3}{2}} - \frac{\frac{1}{2}y'^2 [y(1+y'^2)]^{-1/2} (2y''y + y'^2 + 1) + y''(\sqrt{y}\sqrt{1+y'^2})}{\sqrt{2gy(1+y'^2)}} = 0$$

After some tedious simplification, which is redacted for clarity,

$$2y''y' + y'^2 + 1 = 0$$

□

This can be shown to be the equation of a cycloid, and FIG. 1 illustrates one such trajectory.

IV. THE SPRING-MASS SYSTEM

Spring-mass systems are very common in physics. Let us define a system with a single mass, tethered to a wall by a spring. Let it have a degree of freedom along the x -axis, and let the origin be at the equilibrium point. Amen.

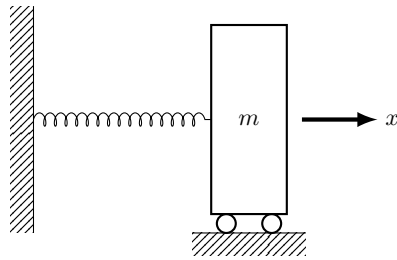


FIG. 2. A single-spring, single-mass system.

The elastic potential energy in this system is simply $V(x) = \frac{1}{2}kx^2$, where k is the constant of compressibility of the spring. The formula for kinetic energy is unchanged ($T(\dot{x}) = \frac{1}{2}m\dot{x}^2$). Knowing these, the conserved term is $\mathcal{L} = T - V = \frac{1}{2}m\dot{x}^2 - \frac{1}{2}kx^2$.

From this, we can directly solve for the Euler-Lagrange equations:

$$\begin{aligned}\frac{\partial \mathcal{L}}{\partial x} &= -kx \\ \frac{\partial \mathcal{L}}{\partial t \partial x} &= m\ddot{x} \\ \implies m\ddot{x} + kx &= 0\end{aligned}$$

This last expression is the differential equation which governs spring motion. If we choose a mass of 1 kg, and a spring constant of

V. GENERALISING THE LAGRANGIAN: DEGREES OF FREEDOM

Until now, we have only considered systems with one degree of freedom (position). However, the Euler-Lagrange method is powerful! We can easily generalize it to an arbitrary number of degrees of freedom. Here, we will consider the case of a system with two degrees of freedom - represented by two coordinates, x and y .

Such a system would form an action integral of:

$$J(x, y) = \int_a^b F(t, x, y, x', y') dt$$

The perturbed functional would then be:

$$\begin{aligned}\phi(\epsilon) &= J(\bar{x} + \epsilon n_x, \bar{y} + \epsilon n_y) \\ &= \int_a^b F(t, \bar{x} + \epsilon n_x, \bar{y} + \epsilon n_y, \bar{x}' + \epsilon n'_x, \bar{y}' + \epsilon n'_y) dt\end{aligned}$$

where $\langle n_x(t), n_y(t) \rangle$ is a small vector perturbations to the system that satisfies:

$$\langle n_x(a), n_y(a) \rangle = \langle 0, 0 \rangle \quad \langle n_x(b), n_y(b) \rangle = \langle 0, 0 \rangle$$

Differentiating the perturbed functional $\phi(\epsilon)$, with respect to ϵ ,

$$\frac{d\phi}{d\epsilon} = \left. \frac{dJ(t, x + \epsilon n_x, y + \epsilon n_y, x' + \epsilon n'_x, y' + \epsilon n'_y)}{d\epsilon} \right|_{\epsilon=0}$$

Solving this algebraically, we can derive this to be:

$$\begin{aligned}&= \int_a^b \left(\frac{\partial F}{\partial x} n_x + \frac{\partial F}{\partial x'} n'_x + \frac{\partial F}{\partial y} n_y + \frac{\partial F}{\partial y'} n'_y \right) dt \\ &= \int_a^b \left(\frac{\partial F}{\partial x} n_x + \frac{\partial F}{\partial x'} \frac{dn_x}{dt} + \frac{\partial F}{\partial y} n_y + \frac{\partial F}{\partial y'} \frac{dn_y}{dt} \right) dt \\ &= \left(\frac{\partial F}{\partial x'} n_x(t) + \frac{\partial F}{\partial y'} n_y(t) \right) \Big|_{t=a}^b + \int_a^b \left(\frac{\partial F}{\partial x} n_x - n_x \frac{d}{dt} \frac{\partial F}{\partial x'} + \frac{\partial F}{\partial y} n_y - n_y \frac{d}{dt} \frac{\partial F}{\partial y'} \right) dt\end{aligned}$$

The boundary terms can be set to zero, from the constraint on perturbation vectors:

$$\begin{aligned}&= \int_a^b \left(\frac{\partial F}{\partial x} n_x - n_x \frac{d}{dt} \frac{\partial F}{\partial x'} + \frac{\partial F}{\partial y} n_y - n_y \frac{d}{dt} \frac{\partial F}{\partial y'} \right) dt \\ &= \int_a^b \left(\left[\frac{\partial F}{\partial x} - \frac{d}{dt} \frac{\partial F}{\partial x'} \right] n_x + \left[\frac{\partial F}{\partial y} - \frac{d}{dt} \frac{\partial F}{\partial y'} \right] n_y \right) dt = 0\end{aligned}$$

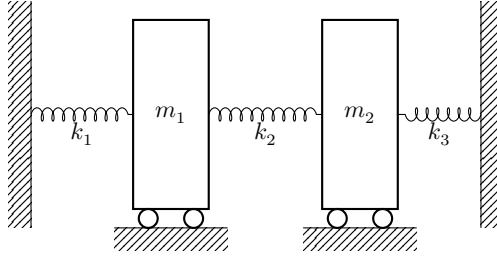


FIG. 3. A triple-spring, double-mass system.

Since this condition must hold for any choice of n_x, n_y , it is sufficient to conclude that the integrand itself must be zero, i.e. that each multiple of n_x, n_y must be zero.

This relationship can be summarized as a pair of Lagrange equations:

$$\frac{\partial F}{\partial x} - \frac{d}{dt} \frac{\partial F}{\partial x'} = 0$$

$$\frac{\partial F}{\partial y} - \frac{d}{dt} \frac{\partial F}{\partial y'} = 0$$

VI. THE TWO MASS, THREE SPRING SYSTEM

As we showed in Section 4, the kinetic energy of an individual spring is $T = \frac{1}{2}k\dot{x}$, and the potential energy is $V = -\frac{1}{2}kx^2$. Using the generalization principle put forth in Section 5, we can derive the equations of motion of a two-mass, three-spring system.

Consider a system with two masses. The first mass (m_1) is connected to a wall by a spring with spring constant k_1 . It is also connected to the second mass, m_2 , via a spring with spring constant k_2 . This second mass is connected to yet another wall, via a spring with spring constant k_3 .

Thus, we can determine the conserved Lagrangian $\mathcal{L} = K - V$:

$$\mathcal{L} = \frac{1}{2} (m_1(\dot{x}_1)^2 + m_2(\dot{x}_2)^2 - k_1x_1^2 - k_3x_2^2 - k_2(x_2 - x_1)^2)$$

The action integral is simply $J = \int \mathcal{L} dt$, and the general Euler-Lagrange equation can be expressed as two equations:

$$\frac{\partial \mathcal{L}}{\partial x_1} - \frac{d}{dt} \frac{\partial \mathcal{L}}{\partial \dot{x}_1} = 0$$

$$\frac{\partial \mathcal{L}}{\partial x_2} - \frac{d}{dt} \frac{\partial \mathcal{L}}{\partial \dot{x}_2} = 0$$

These equations resolve to

$$0 = -(m_1(\ddot{x}_1) + k_1x_1 - k_2(x_2 - x_1))$$

$$0 = -(m_2(\ddot{x}_2) + k_3x_2 + k_2(x_2 - x_1))$$

This result is the same one would get from analyzing the system using $F = ma$. The benefit of the Euler-Lagrange method is one does not have to displace the masses. It also eliminates the need to be concerned with direction, since energy is a scalar, unlike force, which is a vector.

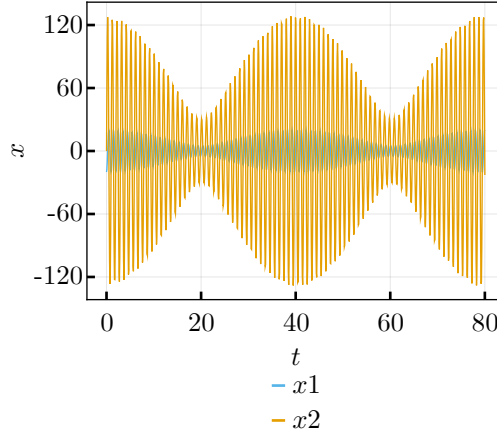


FIG. 4. A timeseries view of the three-spring, two-mass system.

VII. THE RAY EQUATION; FERMAT'S PRINCIPLE

The velocity of an object in 2D can be broken down into its basis component, and the line element can be written in terms of velocity.

$$v = \sqrt{x'^2 + y'^2} \quad ds = v dt = \sqrt{x'^2 + y'^2} dt$$

Then the total time taken can be calculated by

$$T = \int_P \frac{ds}{c(x, y)} = \int_P \frac{\sqrt{x'^2 + y'^2} dt}{c(x, y)} = \int_P F(t, x, x', y, y') dt$$

$$\text{where } F(t, x, x', y, y') = \frac{\sqrt{x'^2 + y'^2}}{c(x, y)}$$

Carry out the derivation for the curve $x(t)$.

$$\frac{\partial F}{\partial x} = \sqrt{x'^2 + y'^2} \frac{\partial}{\partial x} \frac{1}{c(x, y)} = -\frac{\sqrt{x'^2 + y'^2}}{c(x, y)^2} \frac{\partial c(x, y)}{\partial x}$$

use the fact that $x' = \frac{dx}{dt}$

$$\frac{d}{dt} \frac{\partial F}{\partial x'} = \frac{d}{dt} \frac{\partial}{\partial x'} \frac{\sqrt{x'^2 + y'^2}}{c(x, y)} = \frac{d}{dt} \frac{x'}{c(x, y) \sqrt{x'^2 + y'^2}} = \frac{d}{dt} \frac{dx}{c(x, y) \sqrt{x'^2 + y'^2} dt}$$

We can convert the independent variable from t to s by multiplying both side of equation 1 by $\frac{dt}{ds} = (x'^2 + y'^2)^{-\frac{1}{2}}$:

$$\frac{\partial F}{\partial x} \frac{dt}{ds} = -(x'^2 + y'^2)^{-\frac{1}{2}} \frac{\sqrt{x'^2 + y'^2}}{c(x, y)^2} \frac{\partial c(x, y)}{\partial x} = -\frac{1}{c(x, y)^2} \frac{\partial c(x, y)}{\partial x}$$

Using chain rule and the fact that $ds = (x'^2 + y'^2)^{-\frac{1}{2}} dt$:

$$\frac{d}{dt} \frac{\partial F}{\partial x'} \frac{dt}{ds} = \frac{dt}{ds} \frac{d}{dt} \frac{dx}{c(x, y) \sqrt{x'^2 + y'^2} dt} = \frac{d}{ds} \frac{dx}{c(x, y) ds}$$

The exact same procedure can be carry out on $y(t)$ curve, which together would yield the following system:

$$\begin{aligned}\frac{d}{ds} \frac{1}{c(x,y)} \frac{dx}{ds} &= -\frac{1}{c(x,y)^2} \frac{\partial c(x,y)}{\partial x} \\ \frac{d}{ds} \frac{1}{c(x,y)} \frac{dy}{ds} &= -\frac{1}{c(x,y)^2} \frac{\partial c(x,y)}{\partial y}\end{aligned}$$

In fact, the system can be generalized into

$$\frac{d}{ds} \frac{1}{c(\vec{r})} \frac{d\vec{r}}{ds} = -\frac{1}{c(\vec{r})^2} \nabla c(\vec{r})$$

Where \vec{r} is the position vector of the object and ∇ is the gradient operator, the expression describe a n-equation system component wise.

Taking $\vec{r} = (x, y)$ would yield the result derived above.

Let's consider ray propagation in a Gradient index (GRIN) medium such as the lens in our eye. Assume the medium is a cylinder shape, the speed of light (i.e. refractive index) varies based on distance from the central optical axis:

$$c = \frac{c_0}{a\sqrt{1-(cr)^2}}$$

where r is radius in cylindrical coordinate, and a, b are arbitrary constants, and c_0 is the speed of light in vacuum.

Choosing $s = z$ (we are interested in the distance from the center as the ray propagate further into the cylinder, i.e. $r(z)$), the ray equation describes that:

$$\begin{aligned}\frac{d}{dz} \frac{a\sqrt{1-(cr)^2}}{c_0} \frac{dr}{dz} &= -\frac{a^2(1-(cr)^2)}{c_0^2} \nabla \frac{c_0}{a\sqrt{1-(cr)^2}} \\ \frac{a\sqrt{1-(cr)^2}}{c_0} \frac{d^2r}{dz^2} &= -\frac{a(1-(cr)^2)}{c_0} \frac{\partial}{\partial r} \frac{1}{\sqrt{1-(cr)^2}} \\ \sqrt{1-(cr)^2} \frac{d^2r}{dz^2} &= -(1-(cr)^2) \frac{\partial}{\partial r} \frac{1}{\sqrt{1-(cr)^2}} \\ \frac{d^2r}{dz^2} &= -\sqrt{1-(cr)^2} \frac{b^2r}{(1-(cr)^2)^{\frac{3}{2}}} \\ \frac{d^2r}{dz^2} &= -\frac{b^2r}{(1-(cr)^2)}\end{aligned}$$

This is a second order autonomous differential equation. We can simply the express by assuming $cr \ll 1$, the ODE then reduce to a simple *second order linear homogeneous non-constant coefficient differential equation*, which we know the answer already:

$$\begin{aligned}\frac{d^2r}{dz^2} &= -\frac{b^2r}{(1-(cr)^2)} \\ &\approx -b^2r \\ \Rightarrow r(z) &= A \cos(cz) + B \sin(cz)\end{aligned}$$

Solving for the initial condition where the light enter at position a with a slope of b

$$\begin{aligned}r(0) &= A \cos(c0) + B \sin(c0) = a \\ \Rightarrow A &= a \\ r'(0) &= -cA \sin(c0) + cB \cos(c0) = b \\ \Rightarrow B &= \frac{b}{c} \\ r(z) &= a \cos(cz) + \frac{b}{c} \sin(cz)\end{aligned}$$

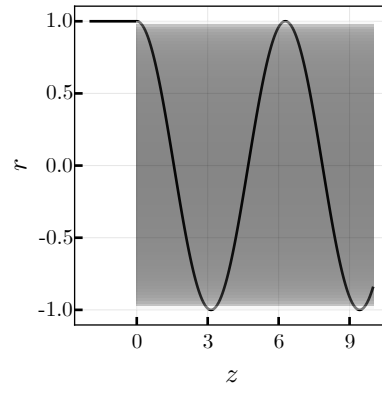


FIG. 5. raytracing

The ray oscillates back and forth across the optical axis.