Chapter 4
Network Layer

Computer Networking: A Top Down Approach
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

Chapter 4: outline

4.1 Introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Network layer

- transport segment from sending to receiving host
- on sending side encapsulates segments into datagrams
- on receiving side, delivers segments to transport layer
- network layer protocols in *every* host, router
- router examines header fields in all IP datagrams passing through it

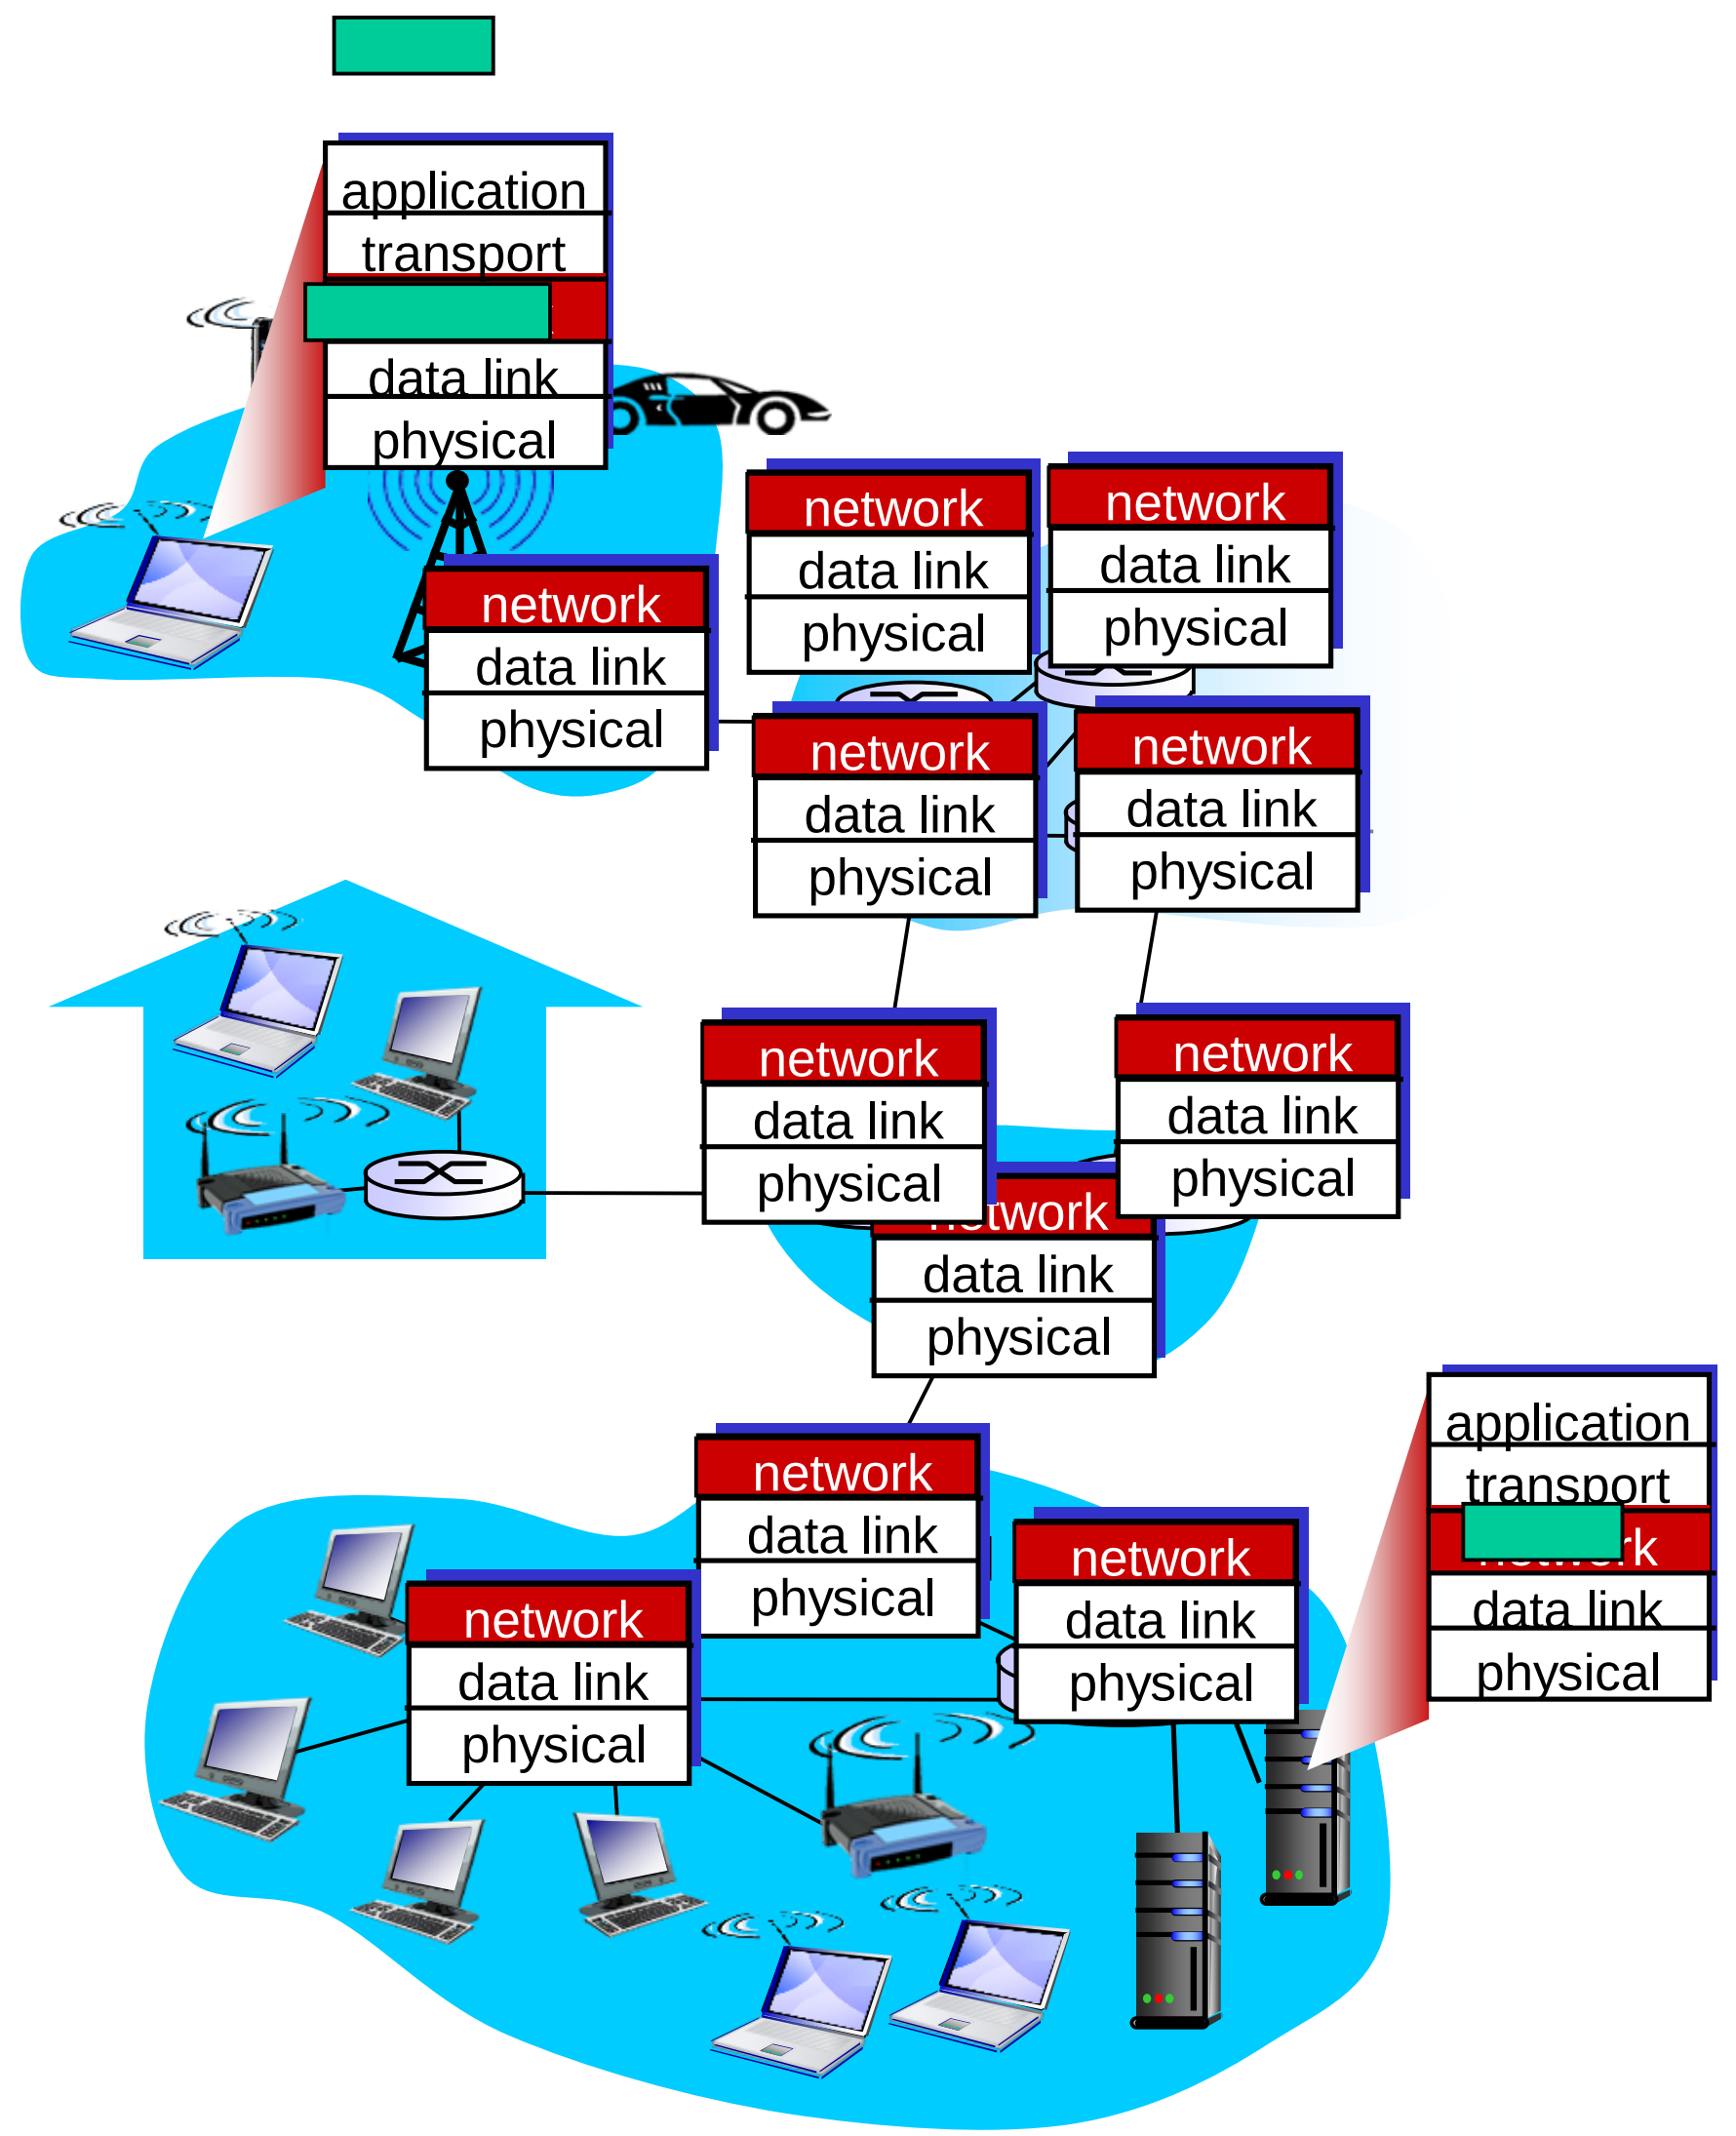

Two key network-layer functions

- *forwarding:* move packets from router's input to appropriate router output
- *routing:* determine route taken by packets from source to dest.
  - *routing algorithms*

analogy:

- *routing:* process of planning trip from source to dest
- *forwarding:* process of getting through single interchange

Interplay between routing and forwarding

routing algorithm determines end-end-path through network

forwarding table determines local forwarding at this router

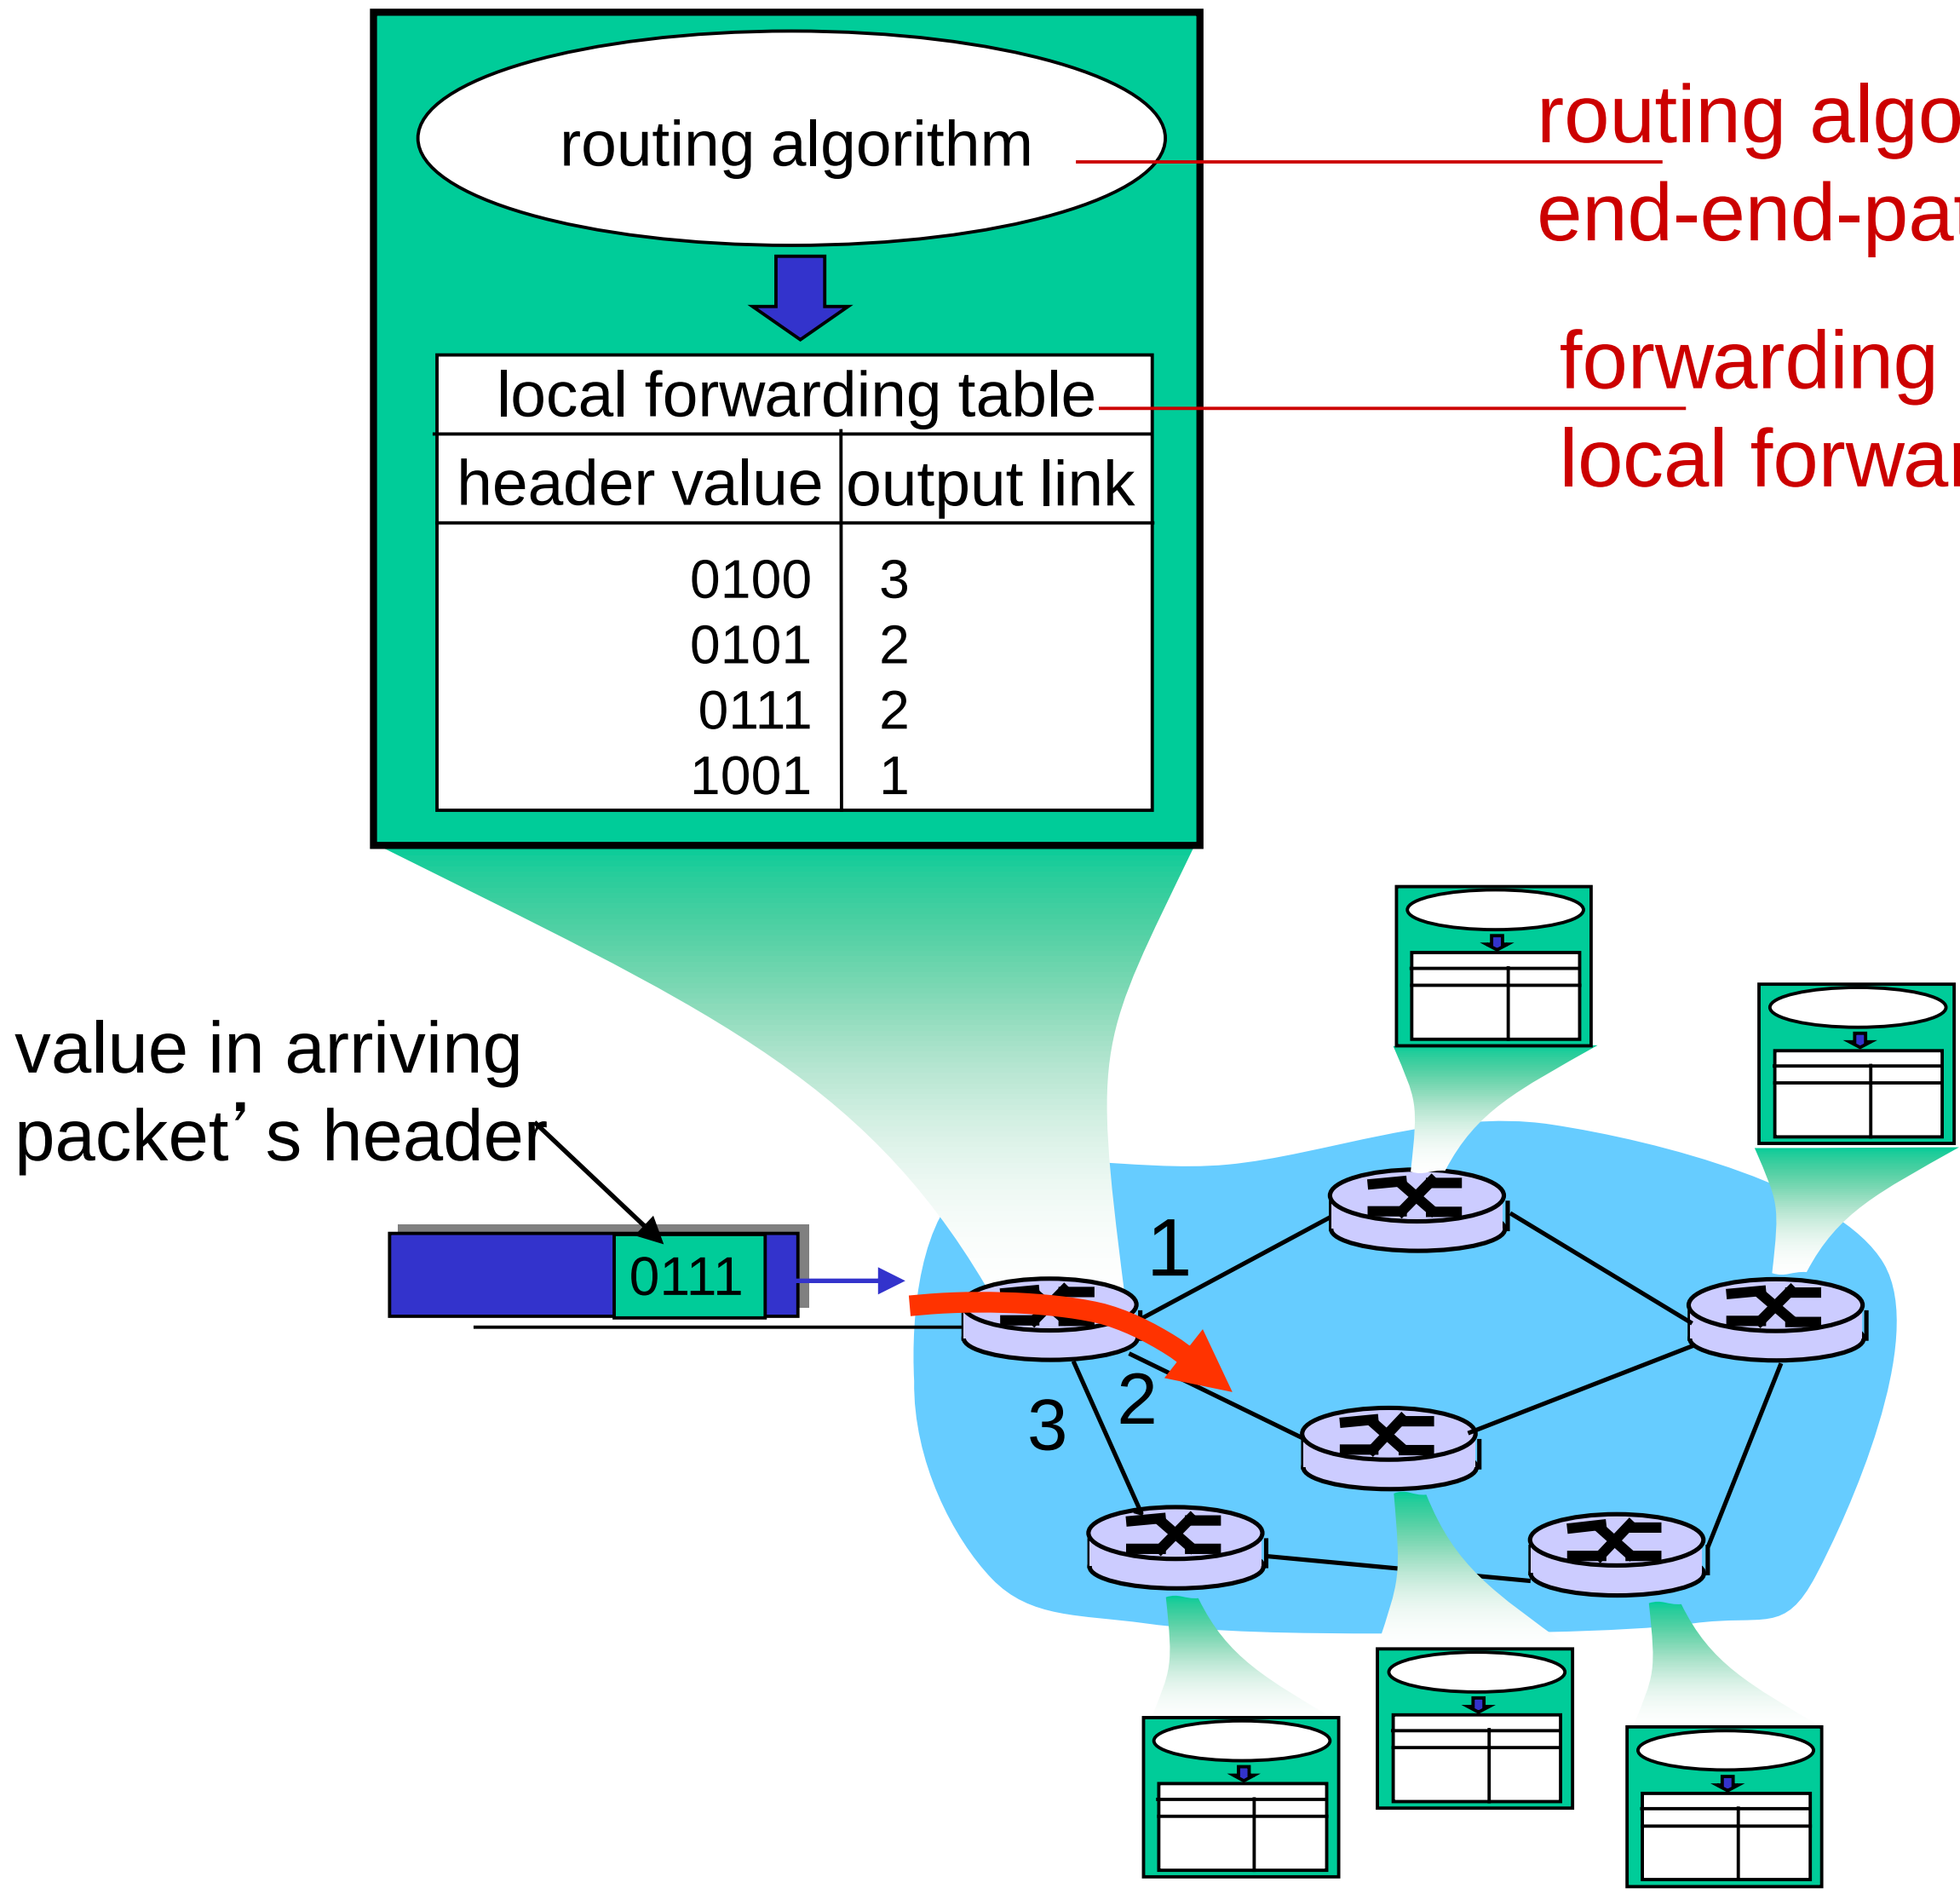

Connection setup

• 3rd important function in *some* network architectures

- before datagrams flow, two end hosts *and* intervening routers establish virtual connection
  - routers get involved

Network service model

Q: What *service model* for "channel" transporting datagrams from sender to receiver?

example services for individual datagrams:

- guaranteed delivery
- guaranteed delivery with bounded delay

example services for a flow of datagrams:

- in-order datagram delivery
- guaranteed minimum bandwidth to flow
- Security services

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Connection, connection-less service

- *datagram* network provides network-layer *connectionless* service
- *virtual-circuit* network provides network-layer *connection* service
- analogous to TCP/UDP connecton-oriented / connectionless transport-layer services
- Features:
  - *service:* host-to-host
  - *no choice:* network provides one or the other
  - *implementation:* in network core

Virtual circuits (VC)

"source-to-dest path behaves much like telephone circuit"

performance-wise network actions along source-to-dest path

VC implementation

a VC consists of:

1. *path* from source to destination
2. *VC numbers*, one number for each link along path
3. *entries in forwarding tables* in routers along path

- packet belonging to VC carries VC number

- VC number can be changed on each link.
  - new VC number comes from forwarding table

VC forwarding table

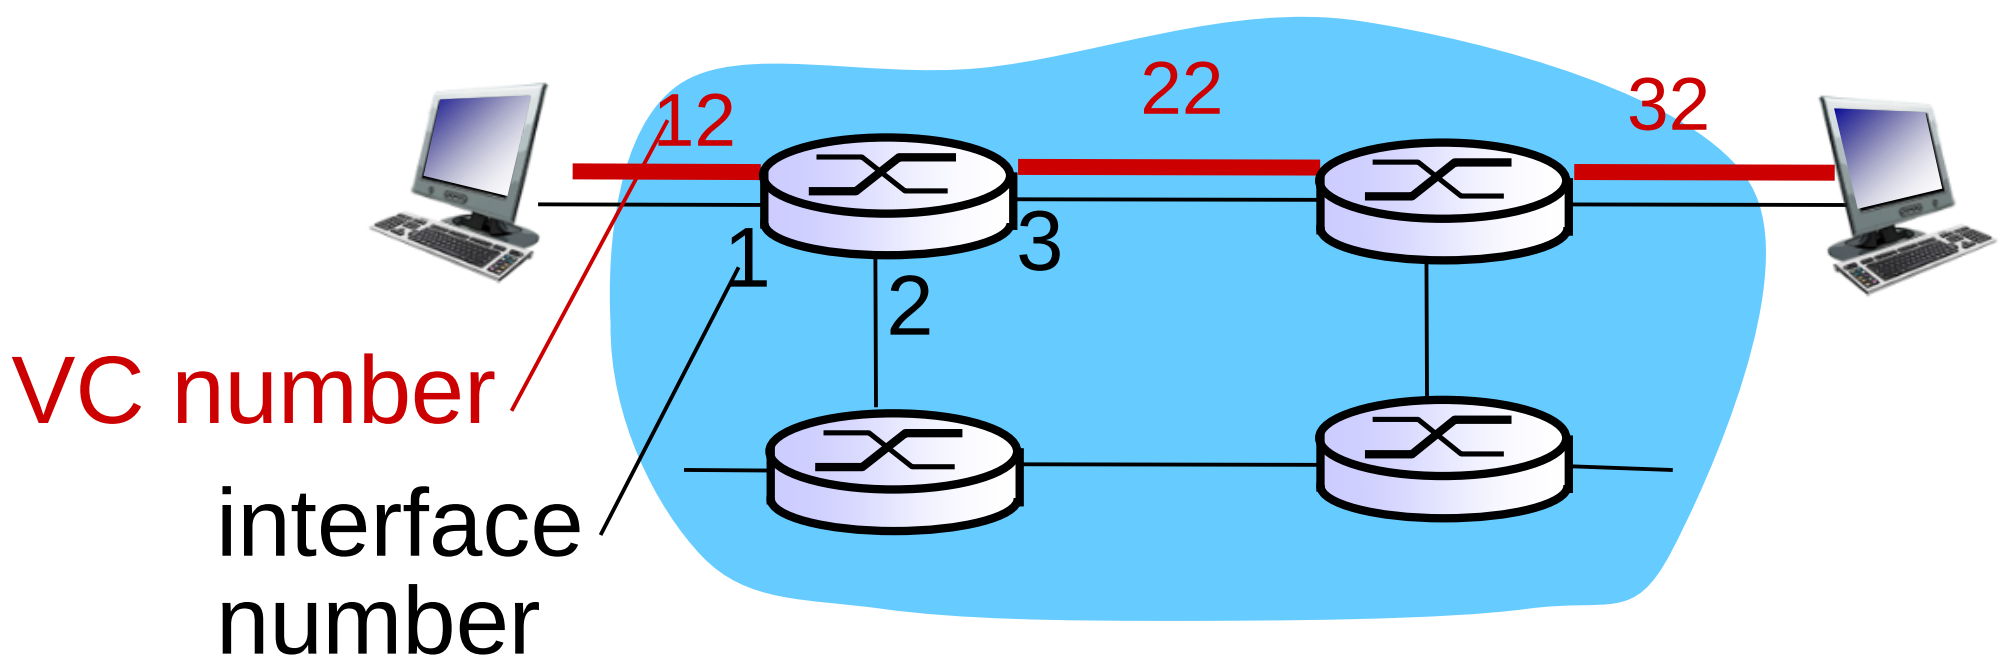

forwarding table in northwest router:

Incoming interface	Incoming VC #	Outgoing interface	Outgoing VC #
1	12	3	22
2	63	1	18
3	7	2	17
1	97	3	87
…	…	…	…

VC routers maintain connection state information!

Virtual circuits: signaling protocols

- used to setup, maintain teardown VC
- used in ATM, frame-relay, X.25
- not used in today's Internet

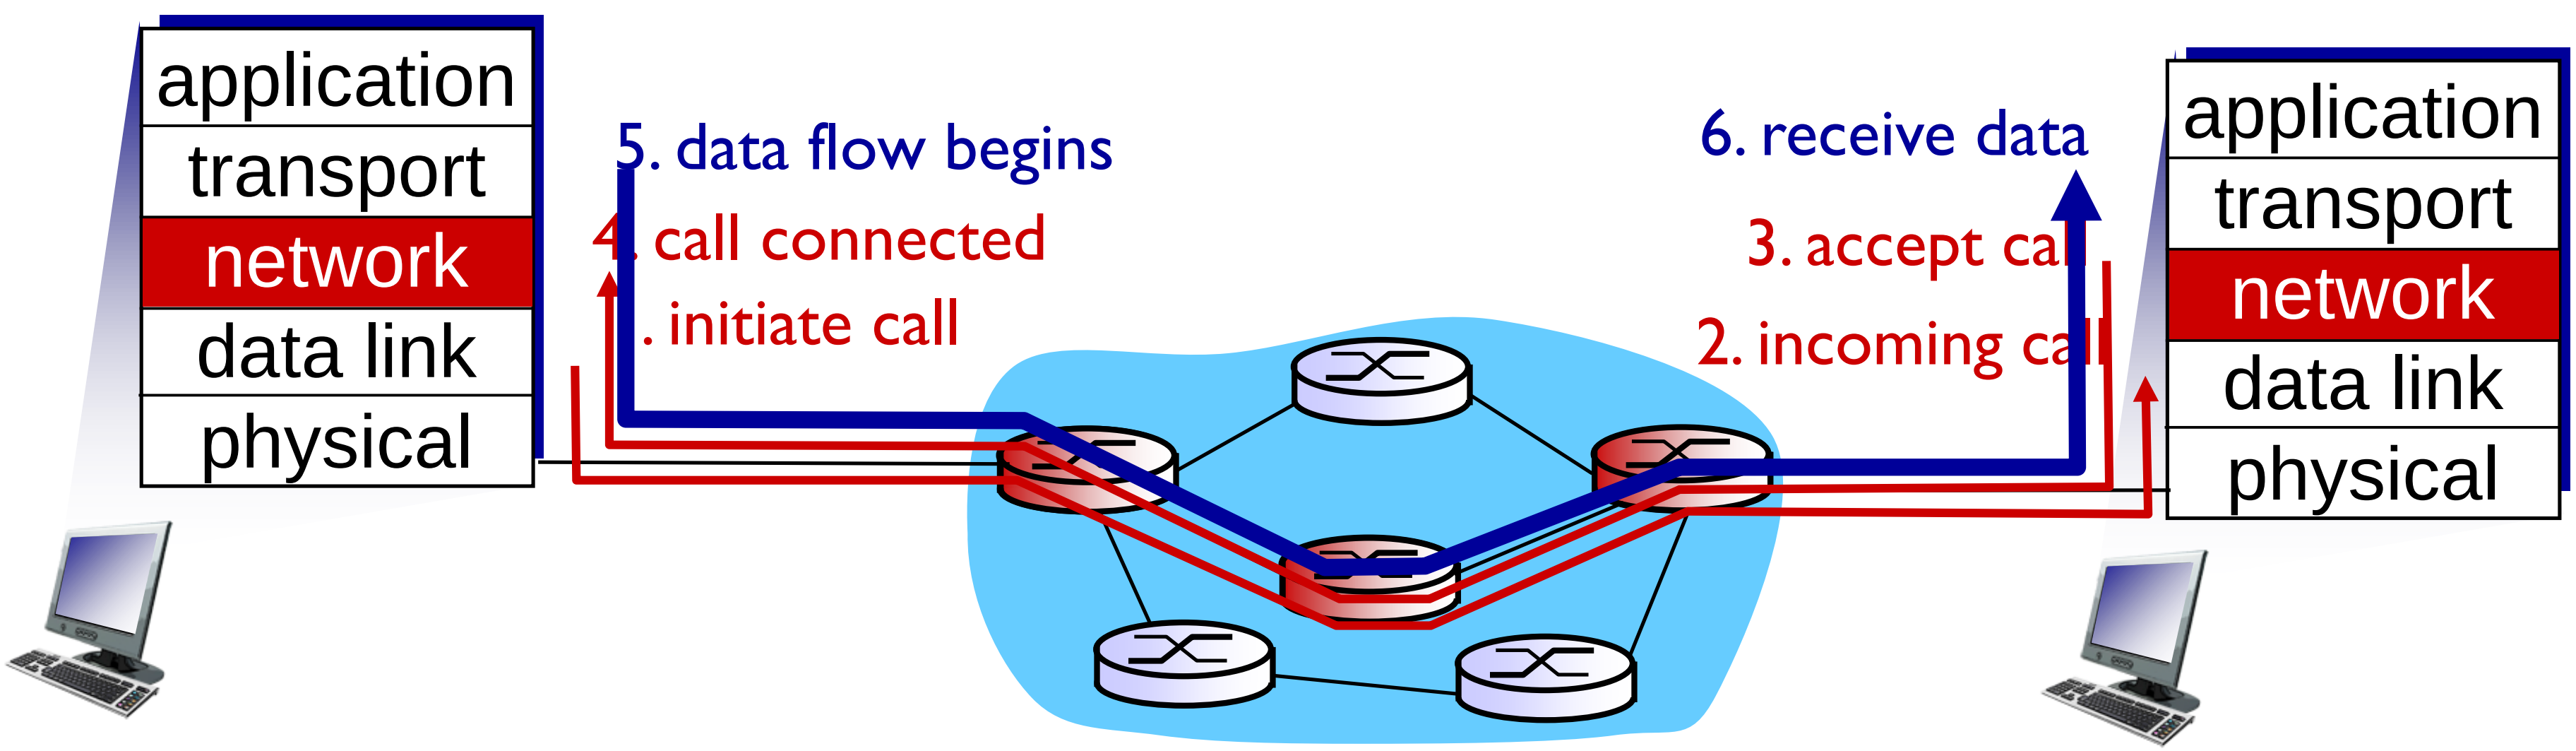

Datagram networks

- no call setup at network layer
- routers: no state about end-to-end connections
  - no network-level concept of "connection"
- packets forwarded using destination host address

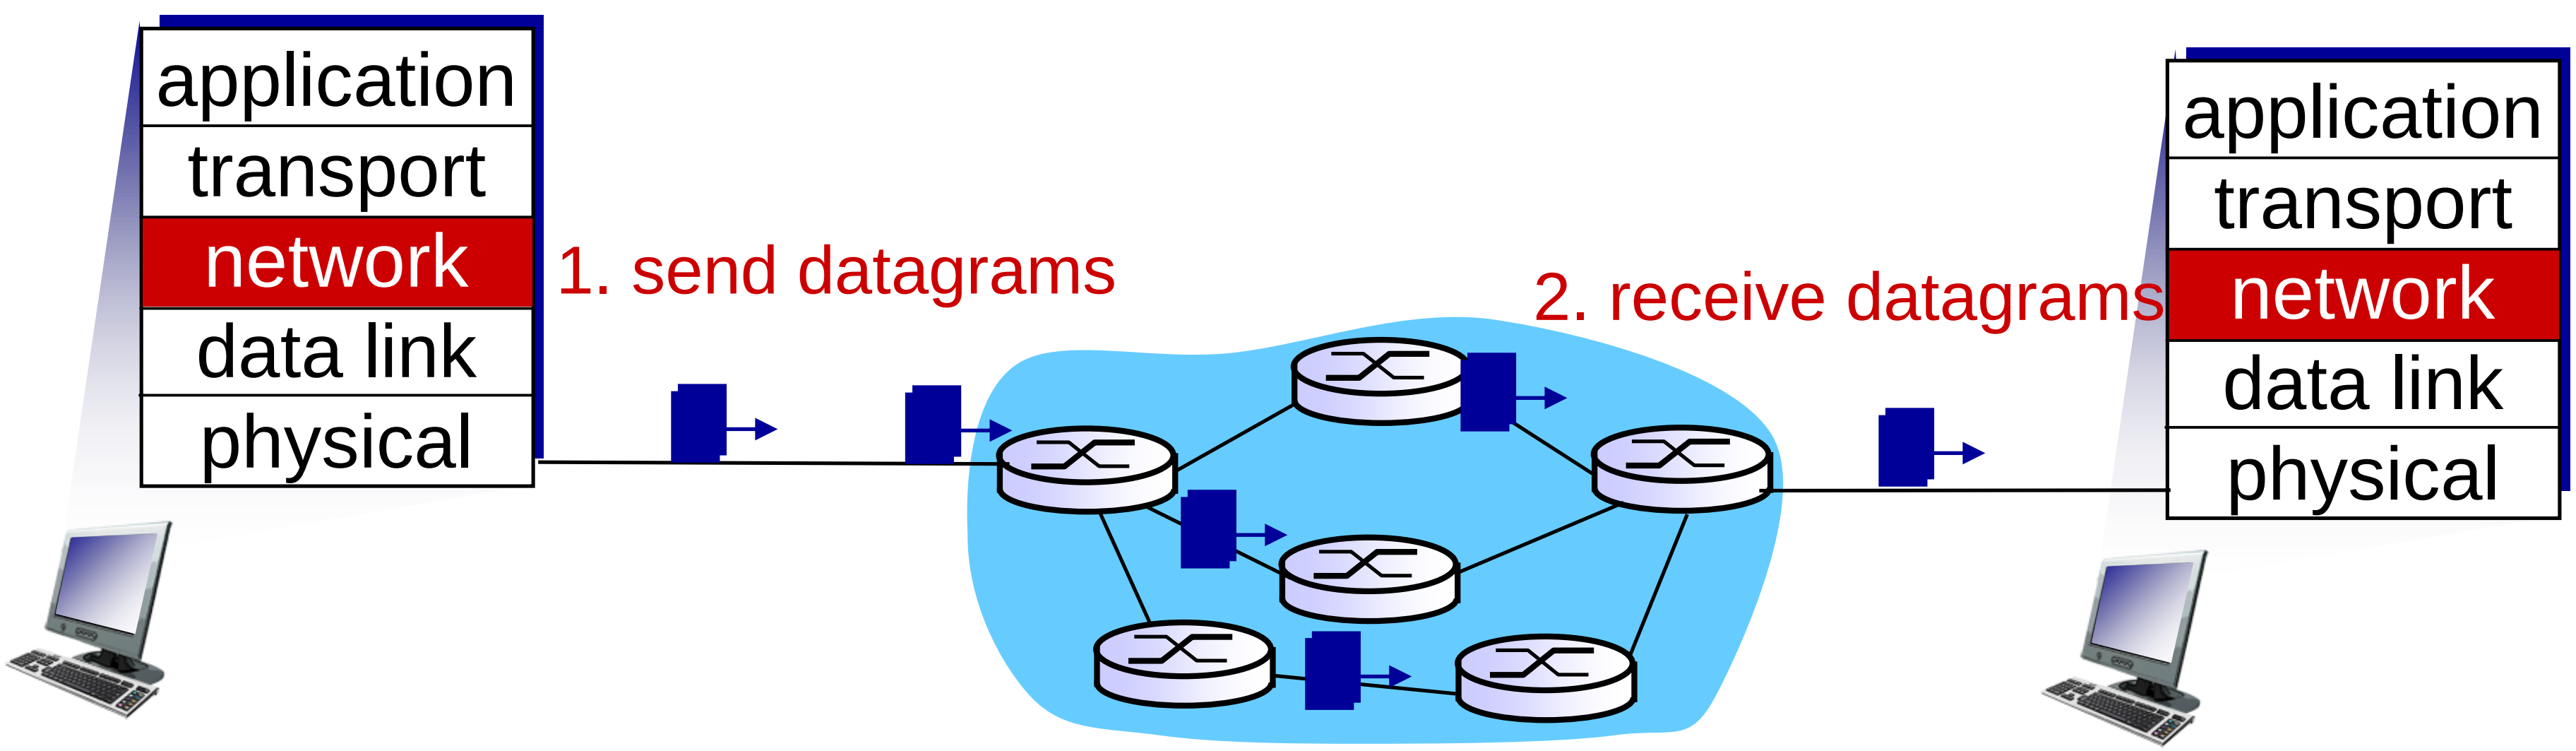

Datagram forwarding table

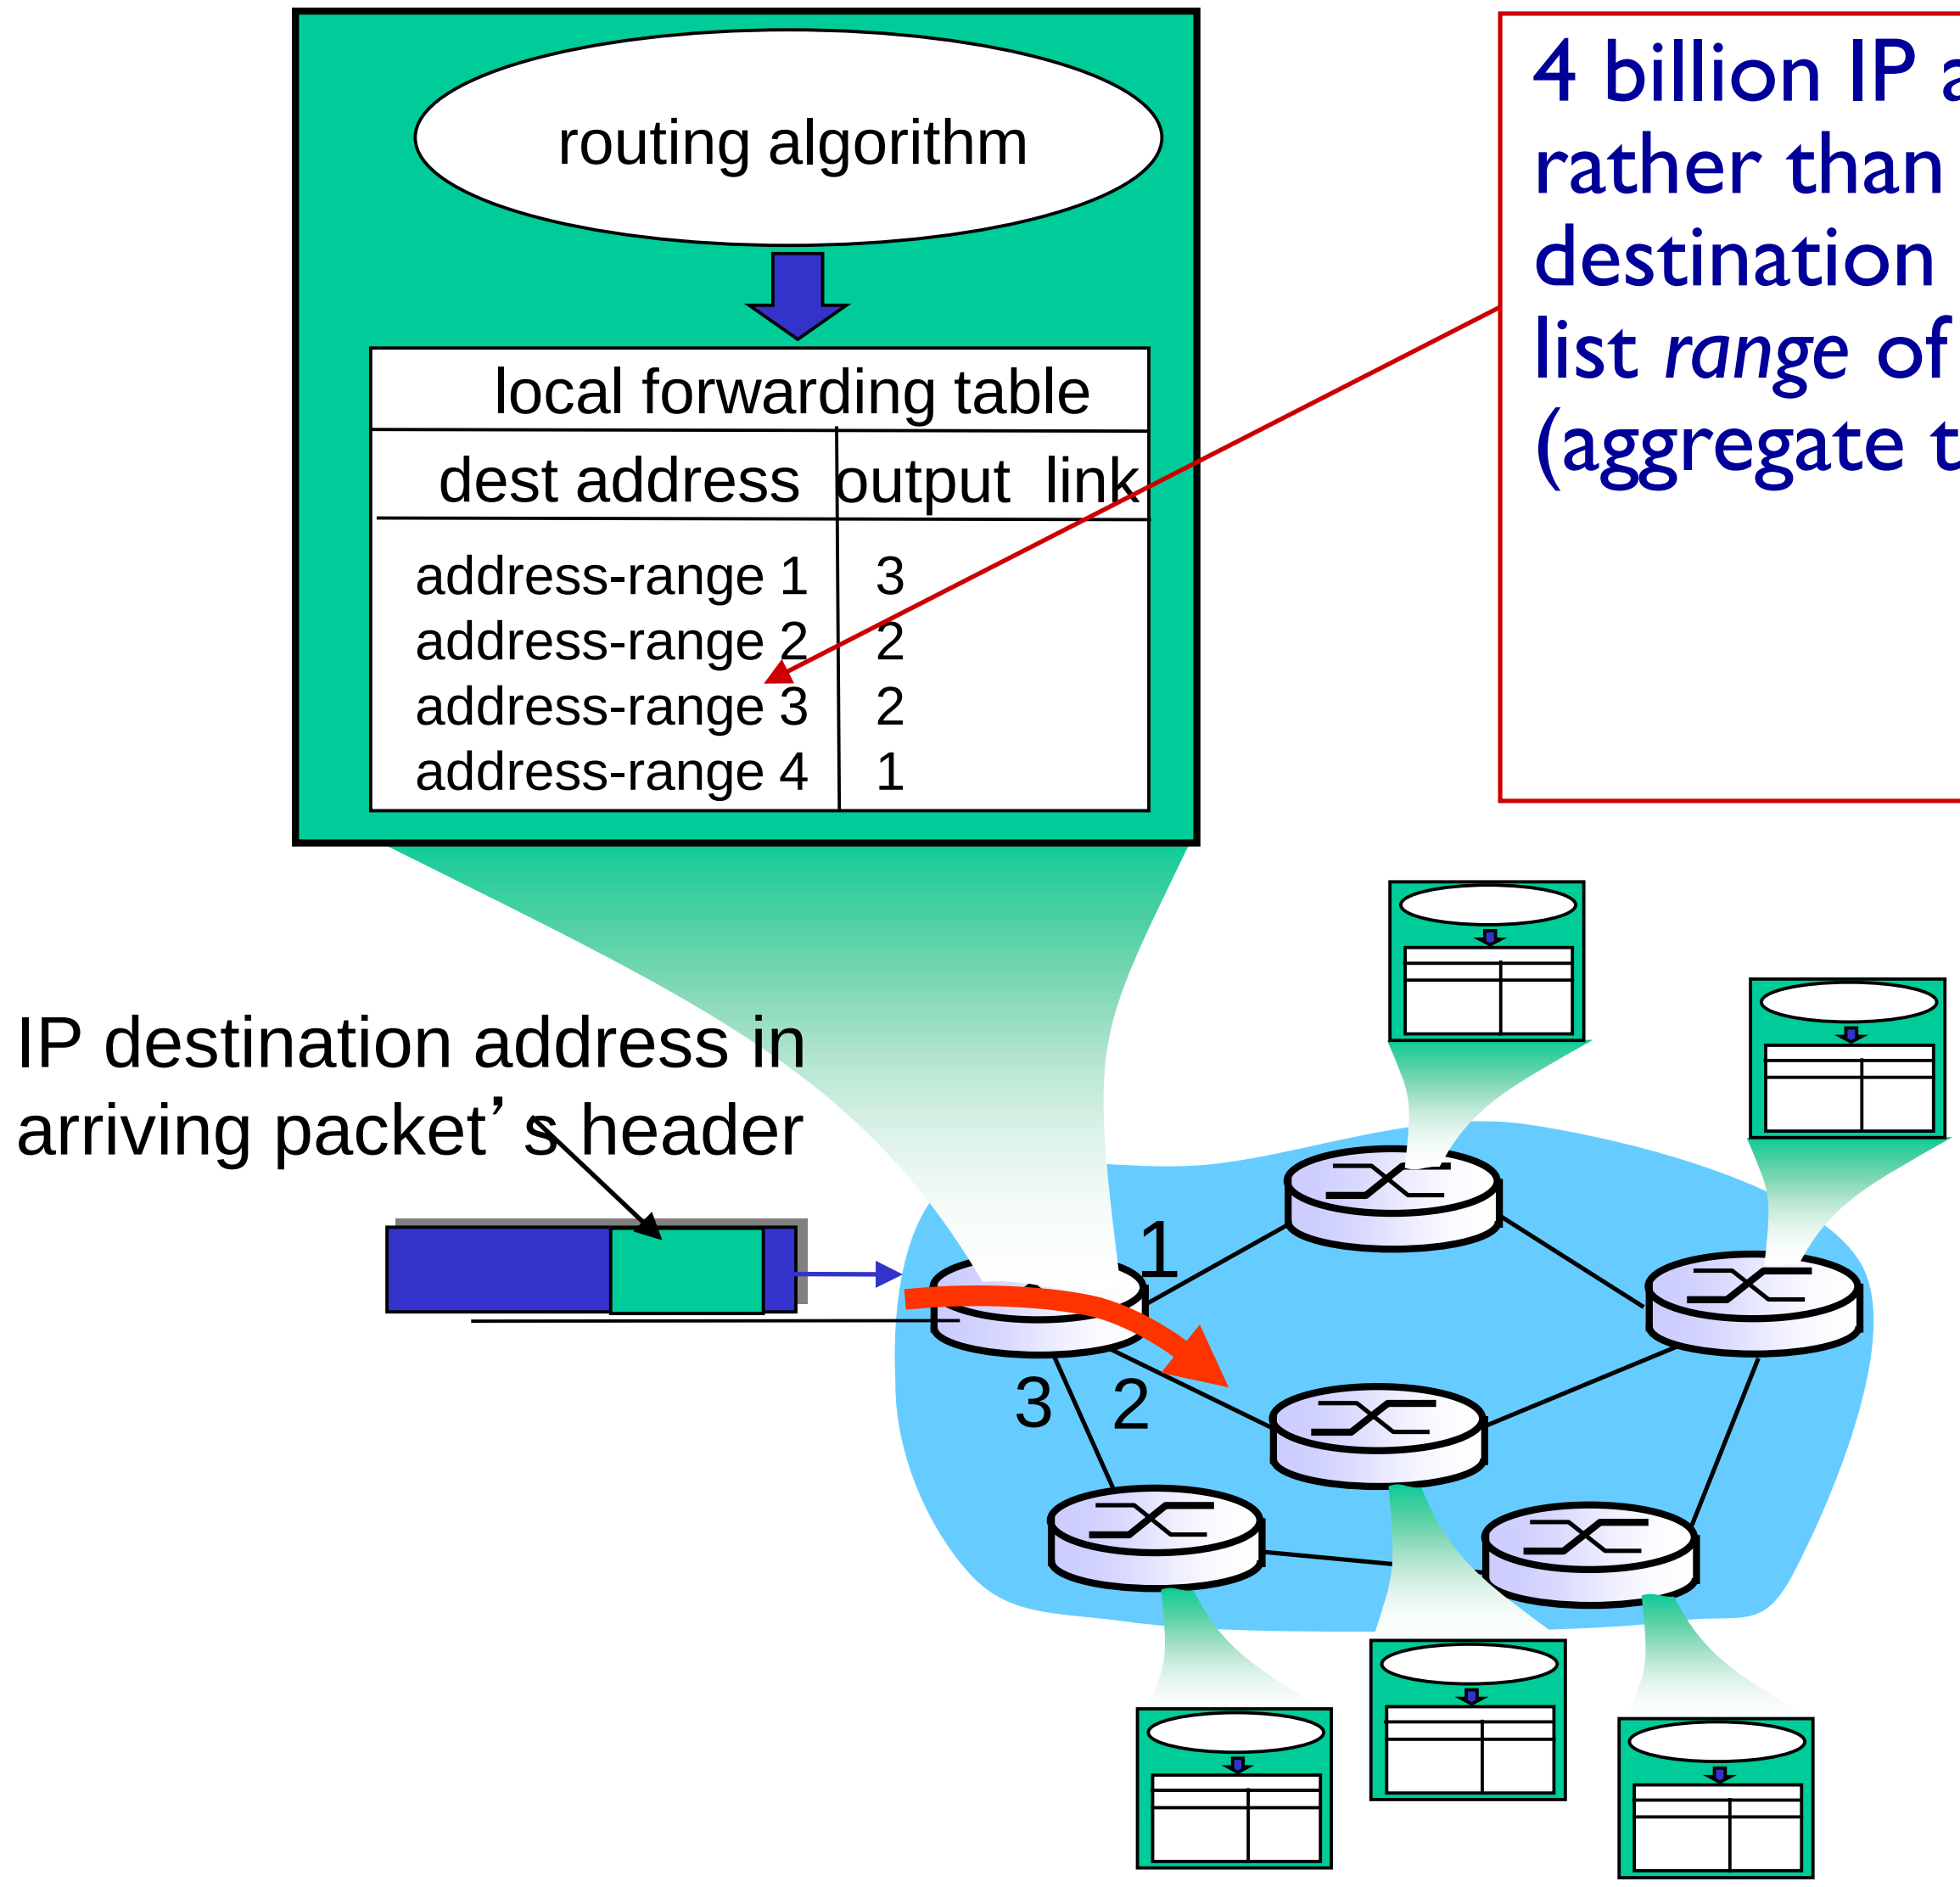

4 billion IP addresses, so rather than list individual destination address list *range* of addresses (aggregate table entries)

Datagram forwarding table

Destination Address Range	Link Interface
11001000 00010111 00010000 00000000 through **11001000 00010111 00010111 11111111**	0
11001000 00010111 00011000 00000000 through **11001000 00010111 00011000 11111111**	1
11001000 00010111 00011001 00000000 through **11001000 00010111 00011111 11111111**	2
otherwise	3

but what happens if ranges don't divide up so nicely?

Longest prefix matching

longest prefix matching

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** *********	0
11001000 00010111 00011000 *********	1
11001000 00010111 00011*** *********	2
otherwise	3

examples:

DA: 11001000 00010111 00010110 10100001 which interface?

DA: 11001000 00010111 00011000 10101010 which interface?

Datagram or VC network: why?

Internet (datagram)

- data exchange among computers
  - "elastic" service, no strict timing req.
- many link types
  - different characteristics
  - uniform service difficult
- "smart" end systems (computers)
  - can adapt, perform control, error recovery
  - ***simple inside network, complexity at "edge"***

ATM (VC)

- evolved from telephony
- human conversation:
  - strict timing, reliability requirements
  - need for guaranteed service
- "dumb" end systems
  - telephones
  - ***complexity inside network***

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Router architecture overview

two key router functions:

- run routing algorithms/protocol
- *forwarding* datagrams from incoming to outgoing link

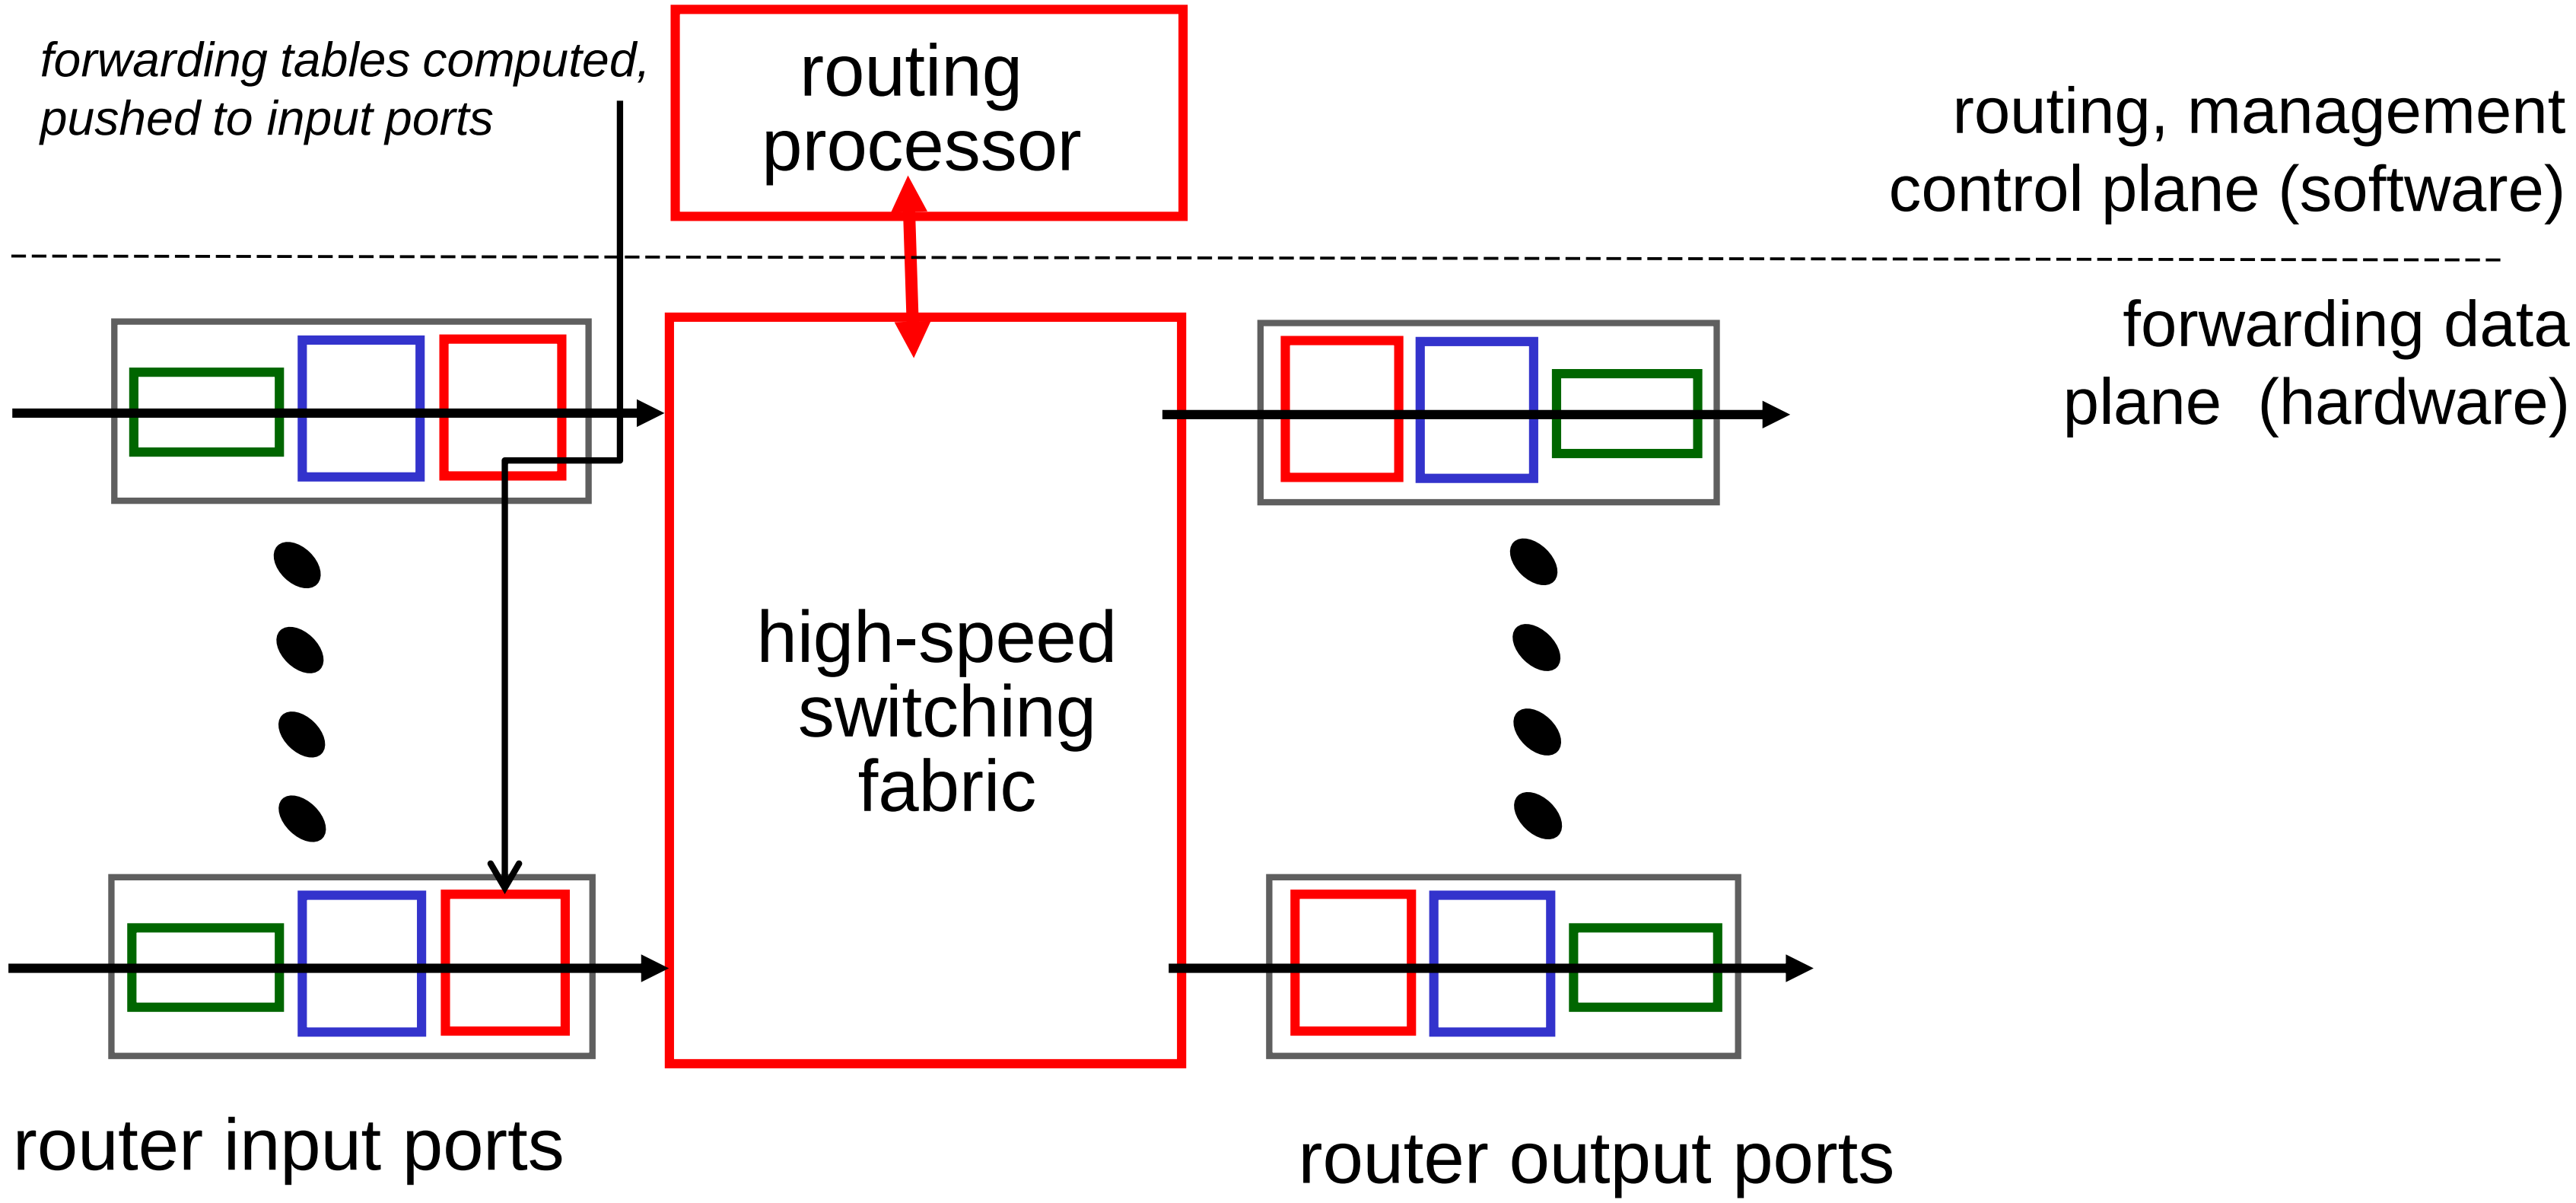

Input port functions

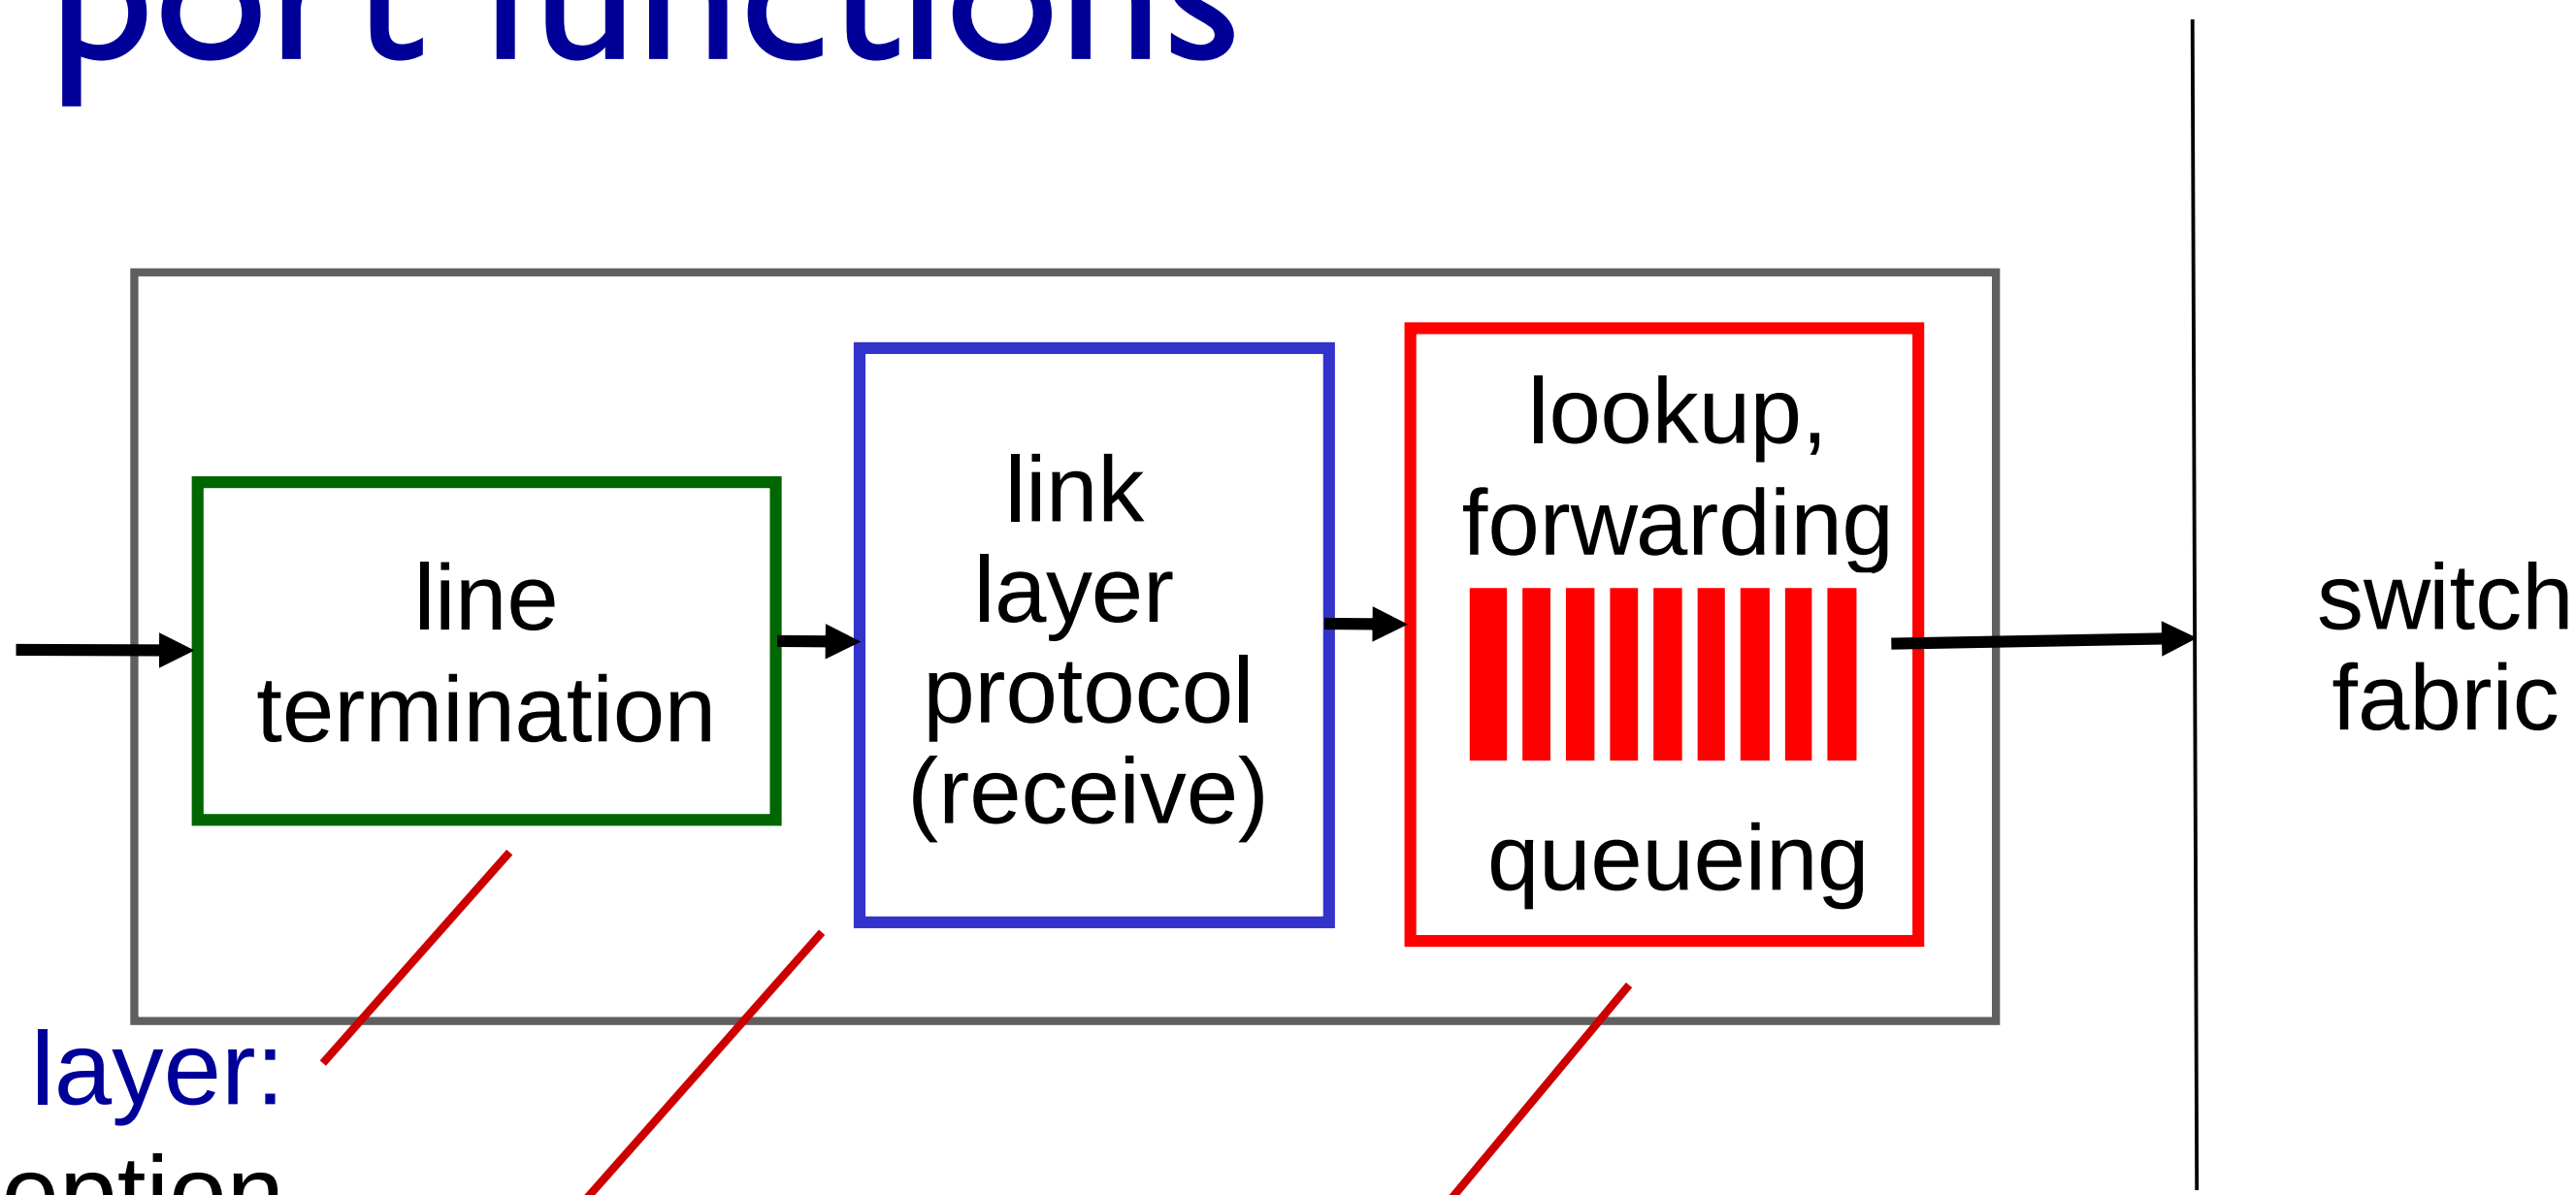

physical layer:
bit-level reception

data link layer:
e.g., Ethernet
see chapter 5

decentralized switching:

- given datagram dest., lookup output port using forwarding table in input port memory
- goal: complete input port processing at 'line speed'
- queueing: if datagrams arrive faster than forwarding rate into switch fabric

Switching fabrics

- transfer packet from input buffer to appropriate output buffer
- switching rate: rate at which packets can be transferred from inputs to outputs
  - often measured as multiple of input/output line rate
  - N inputs: switching rate N times line rate desirable
- three types of switching fabrics

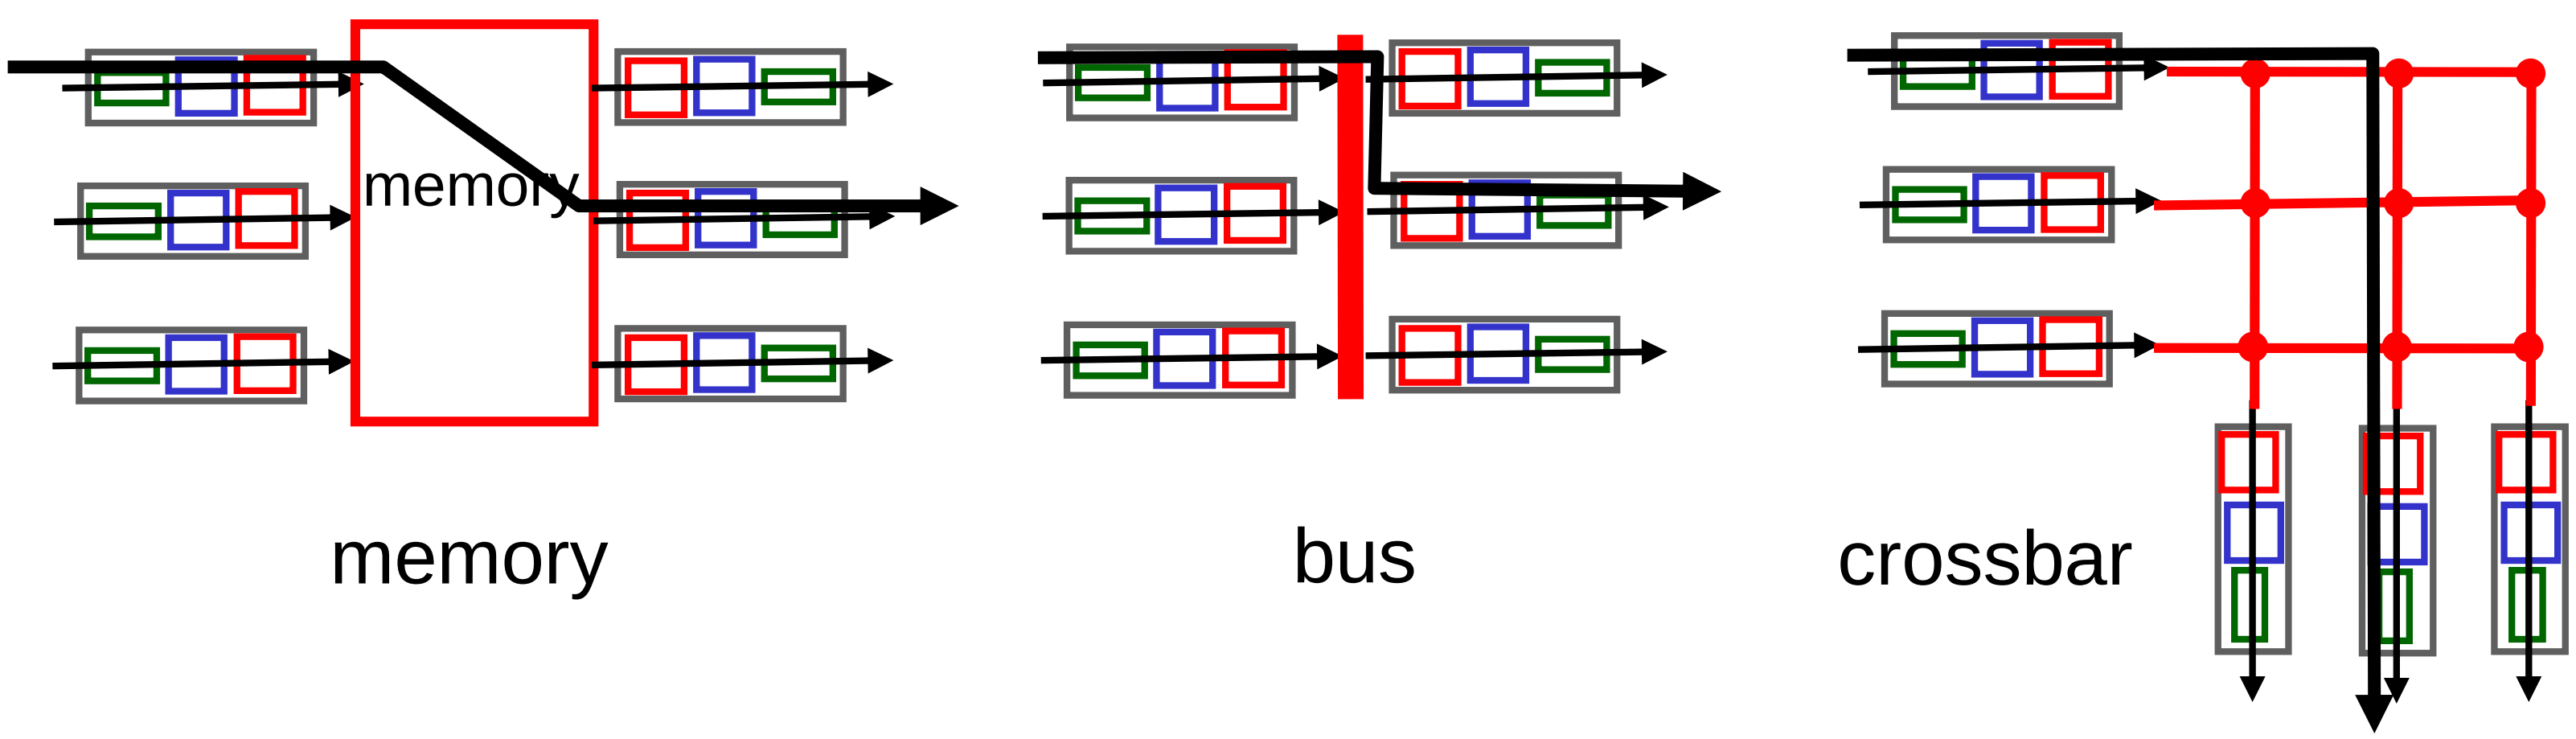

Switching via memory

first generation routers:

- traditional computers with switching under direct control of CPU
- packet copied to system's memory
- speed limited by memory bandwidth (2 bus crossings per datagram)

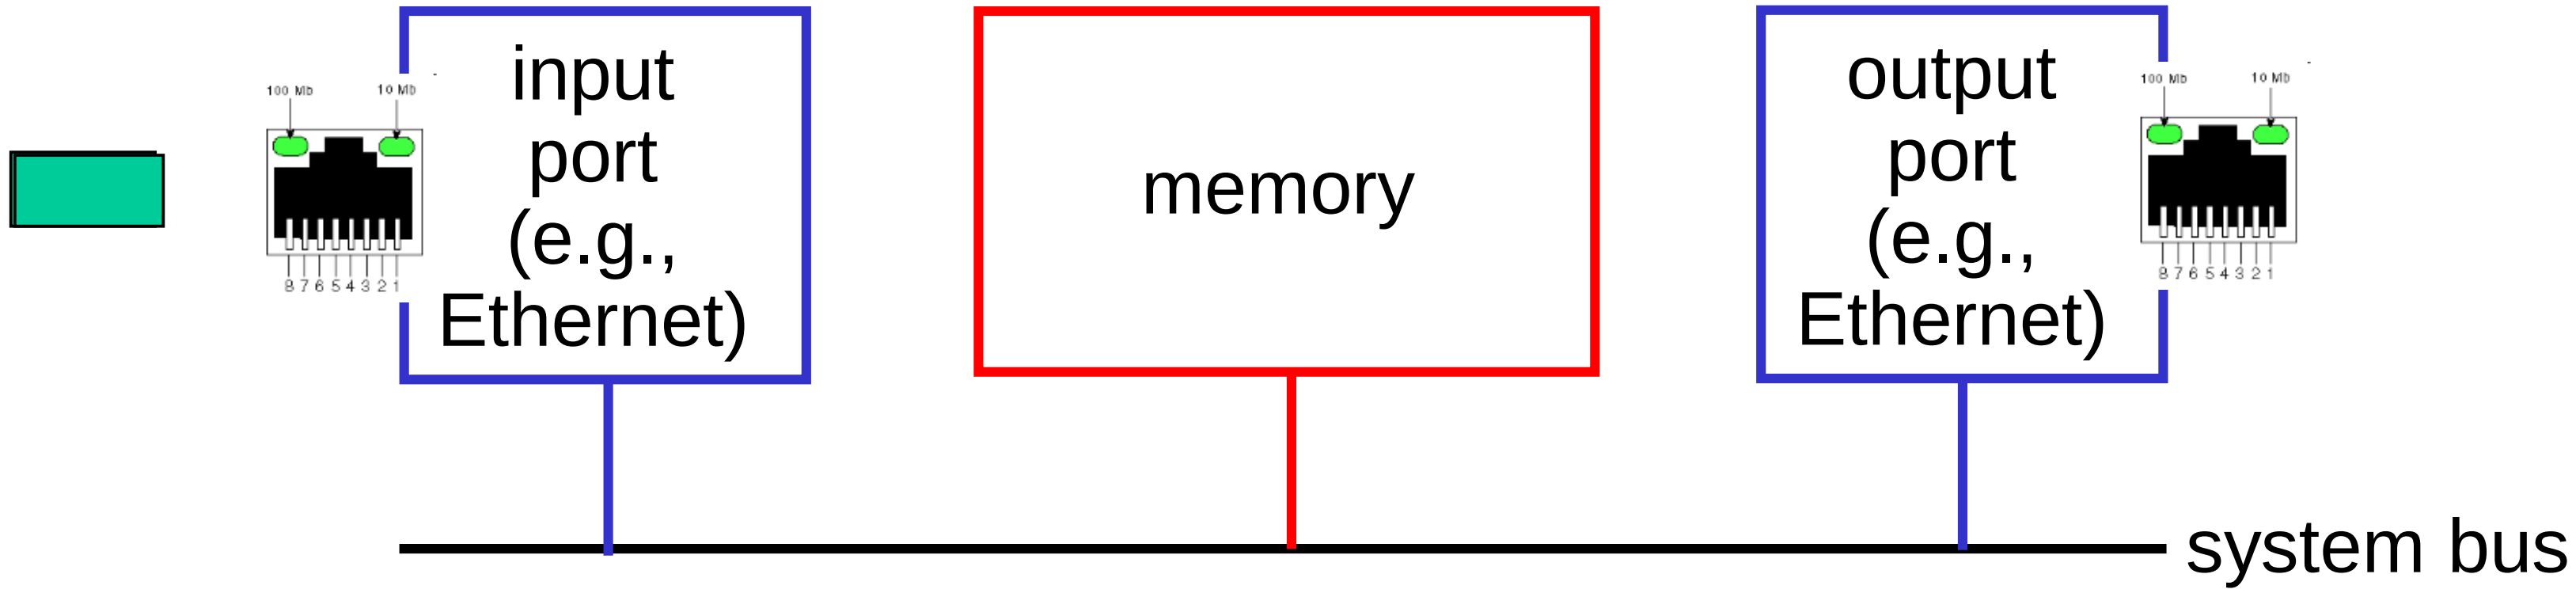

Switching via a bus

- datagram from input port memory to output port memory via a shared bus
- *bus contention:* switching speed limited by bus bandwidth

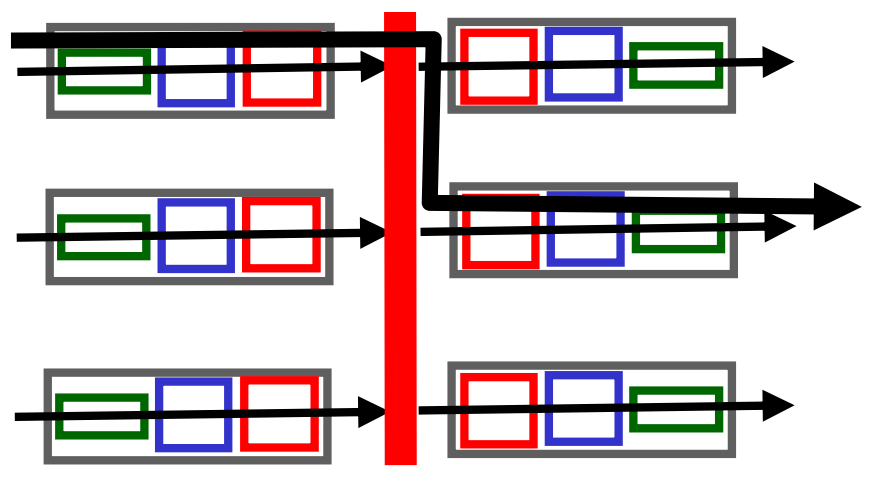

bus

Switching via interconnection network

- overcome bus bandwidth limitations
- banyan networks, crossbar, other interconnection nets initially developed to connect processors in multiprocessor
- advanced design: fragmenting datagram into fixed length cells, switch cells through the fabric.

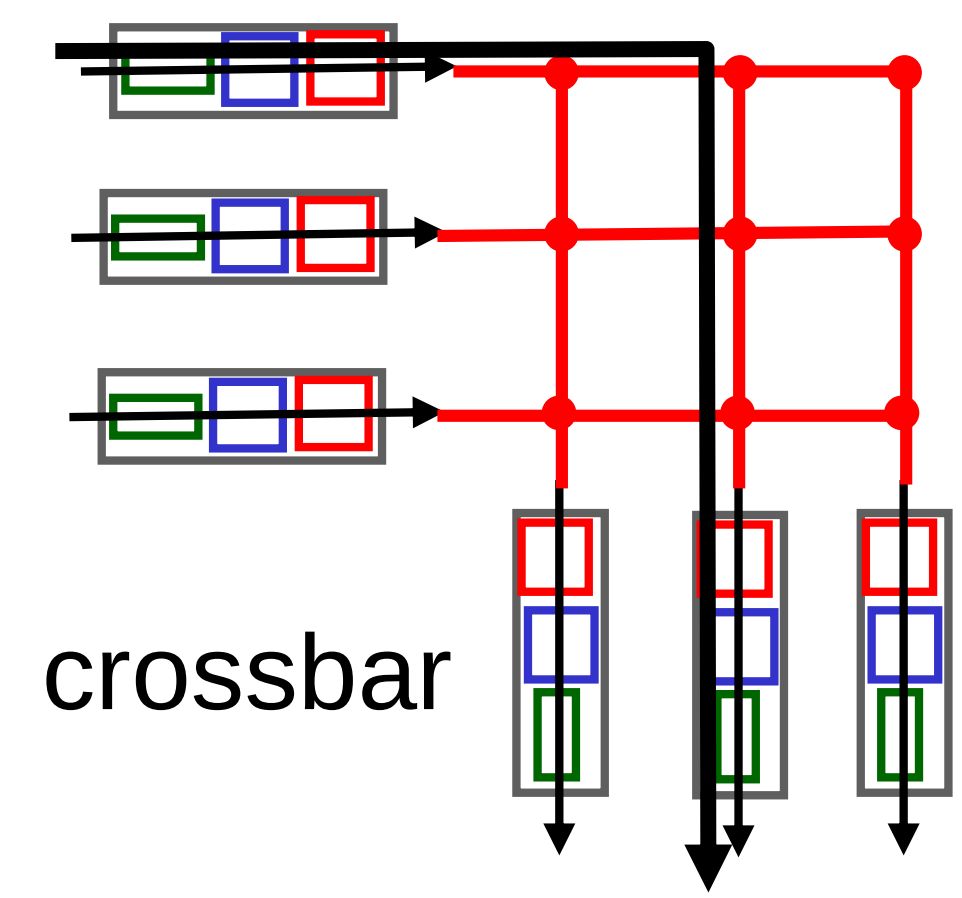

Output ports

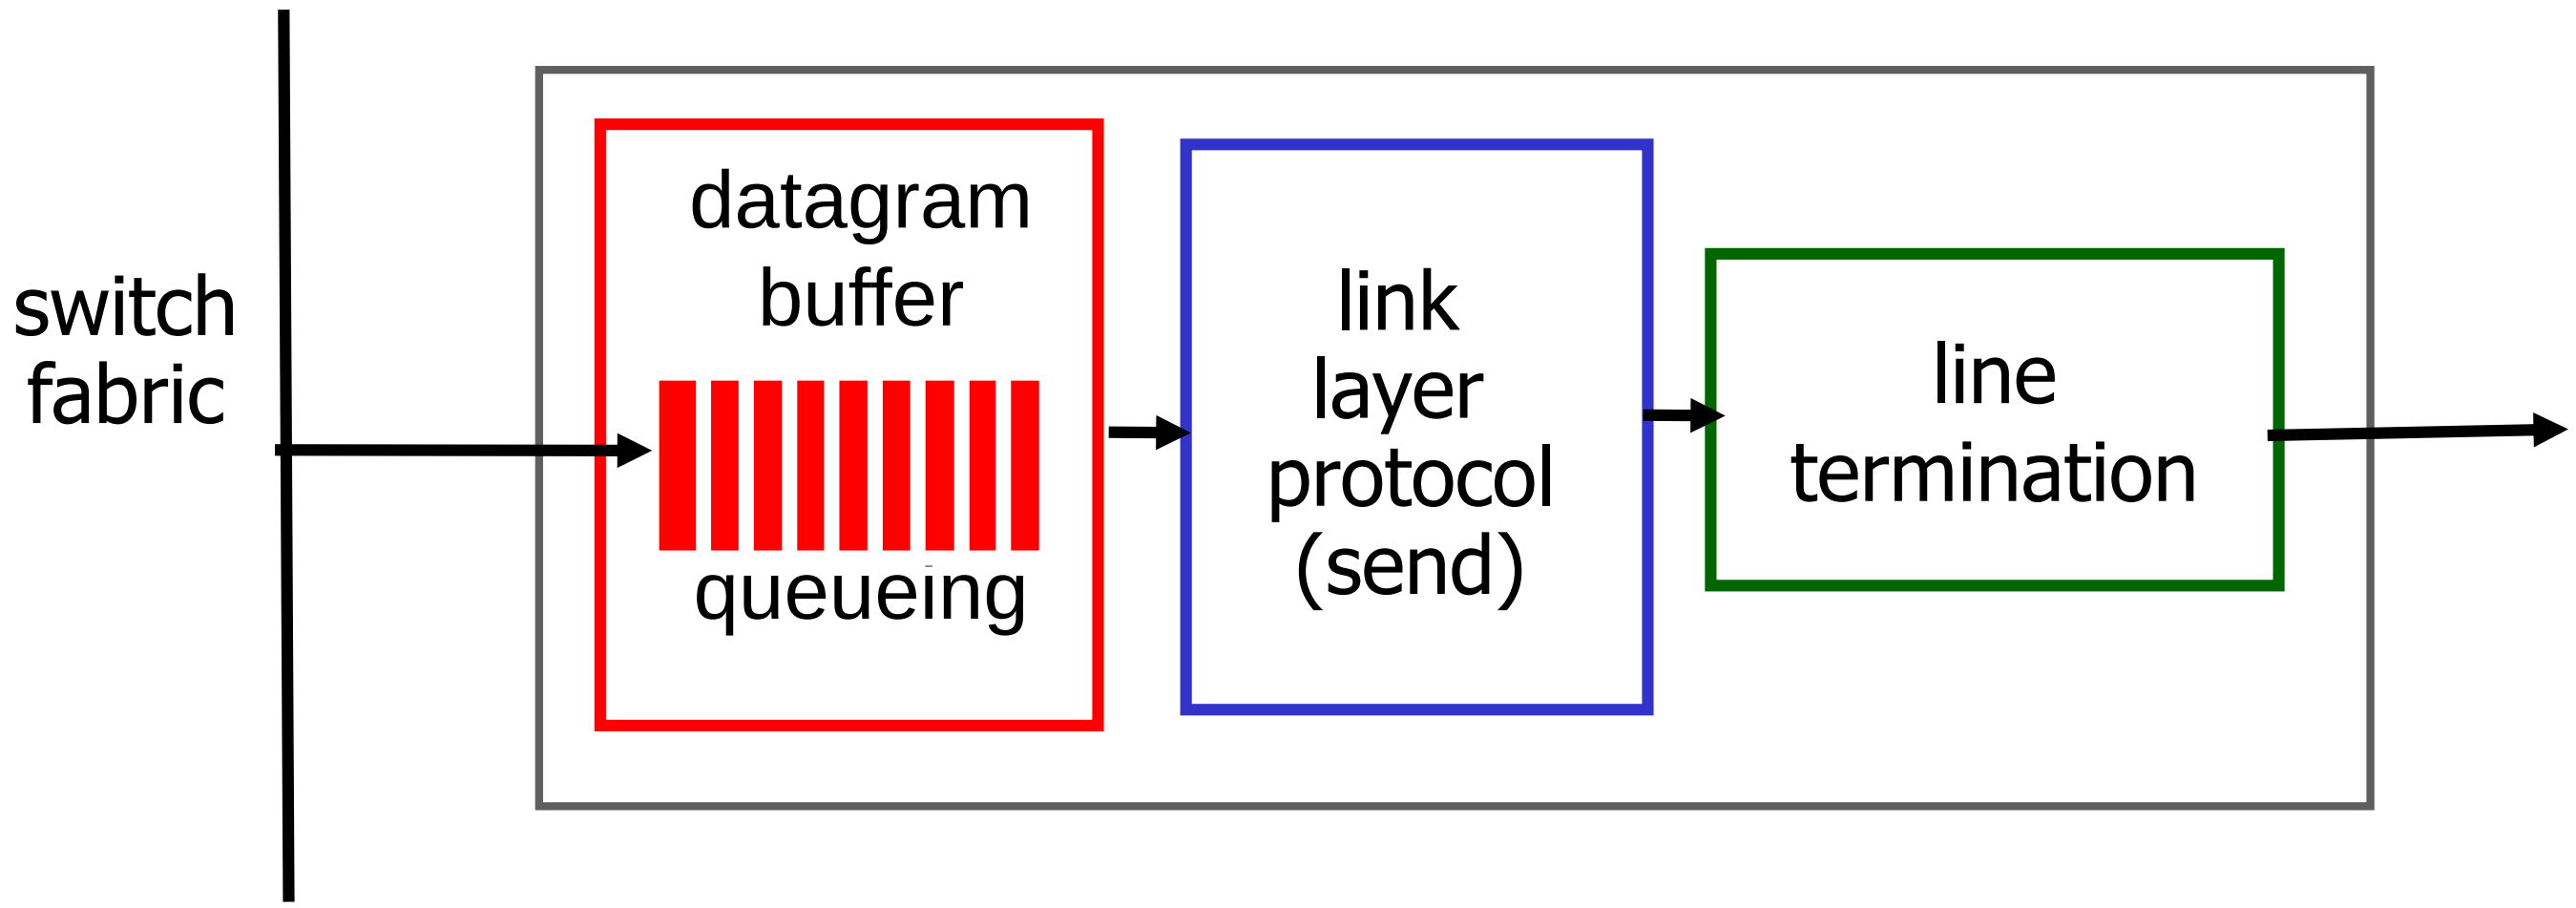

- *buffering* required from fabric faster rate

Datagram (packets) can be lost due to congestion, lack of buffers

- *scheduling discipline* chooses among queued datagrams for transmission

Output port queueing

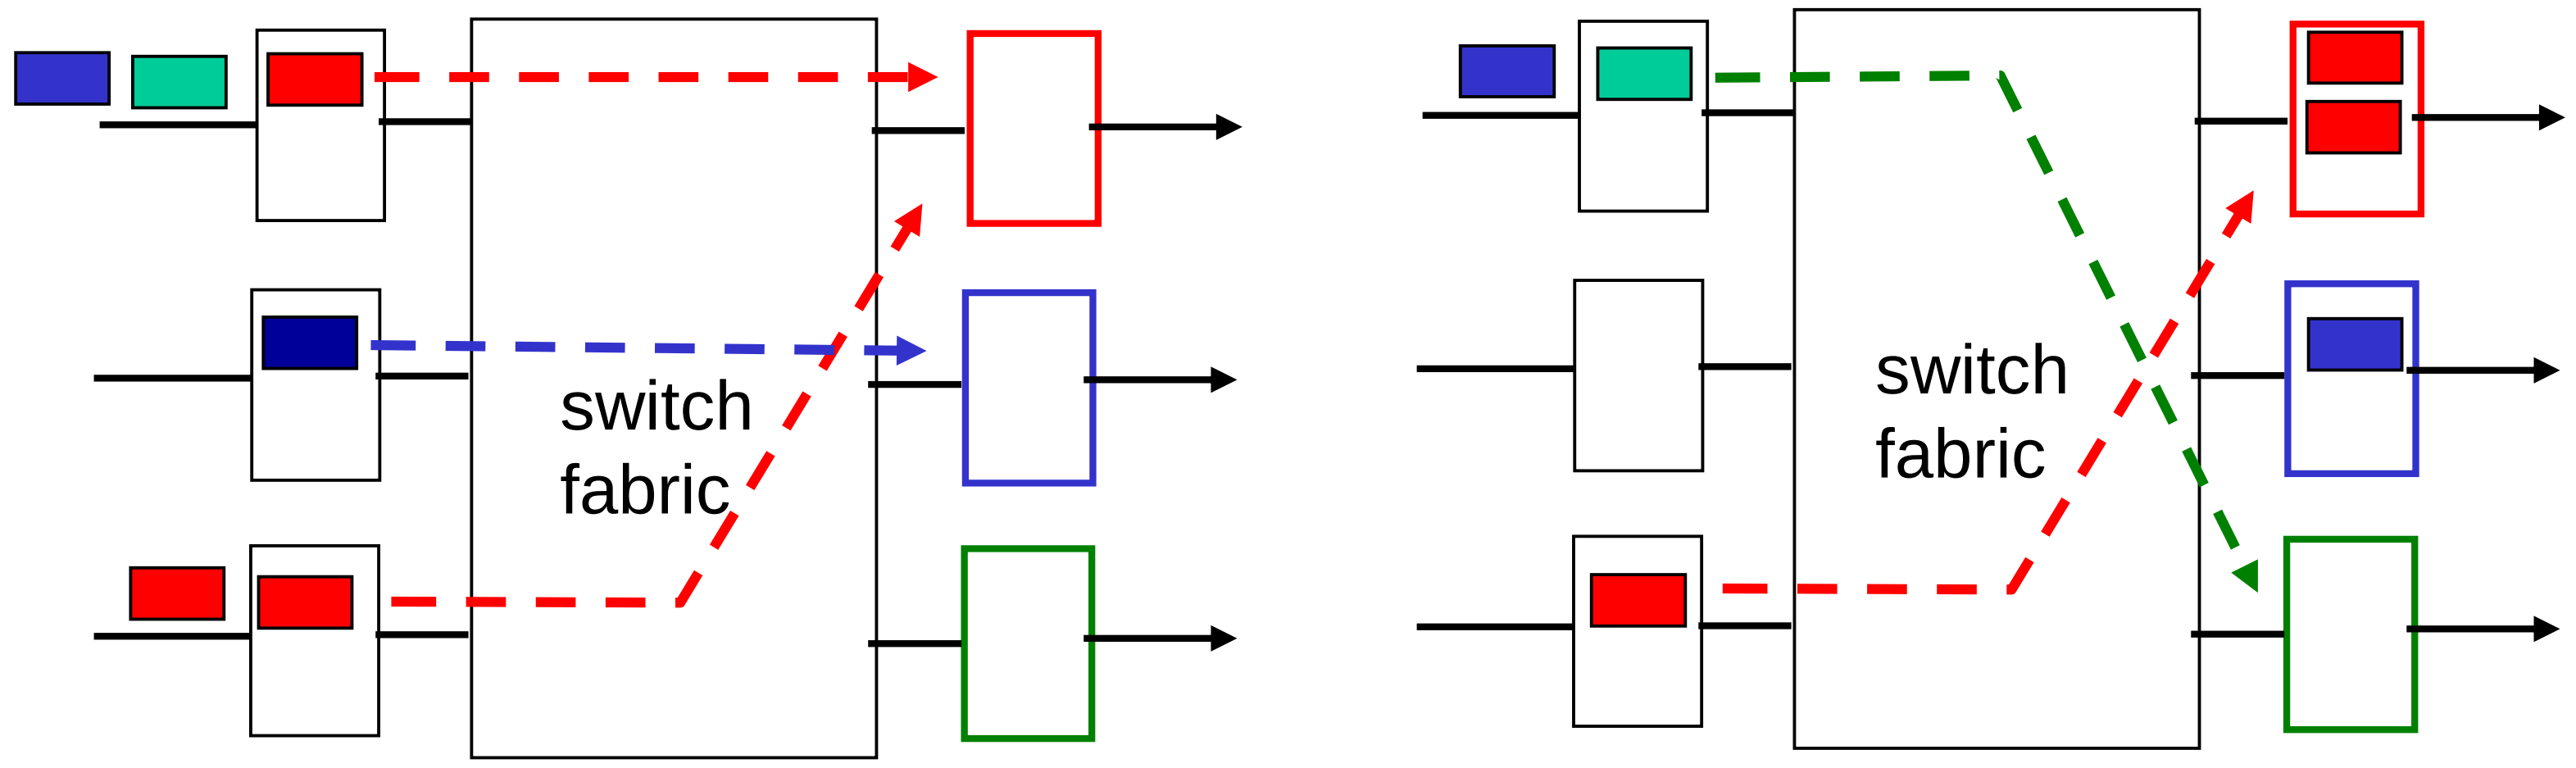

at *t*, packets more from input to output

one packet time later

- buffering when arrival rate via switch exceeds output line speed
- *queueing (delay) and loss due to output port buffer overflow!*

Input port queuing

- fabric slower than input ports combined -> queueing may occur at input queues
  - *queueing delay and loss due to input buffer overflow!*
- Head-of-the-Line (HOL) blocking: queued datagram in front of queue prevents others in queue from moving forward

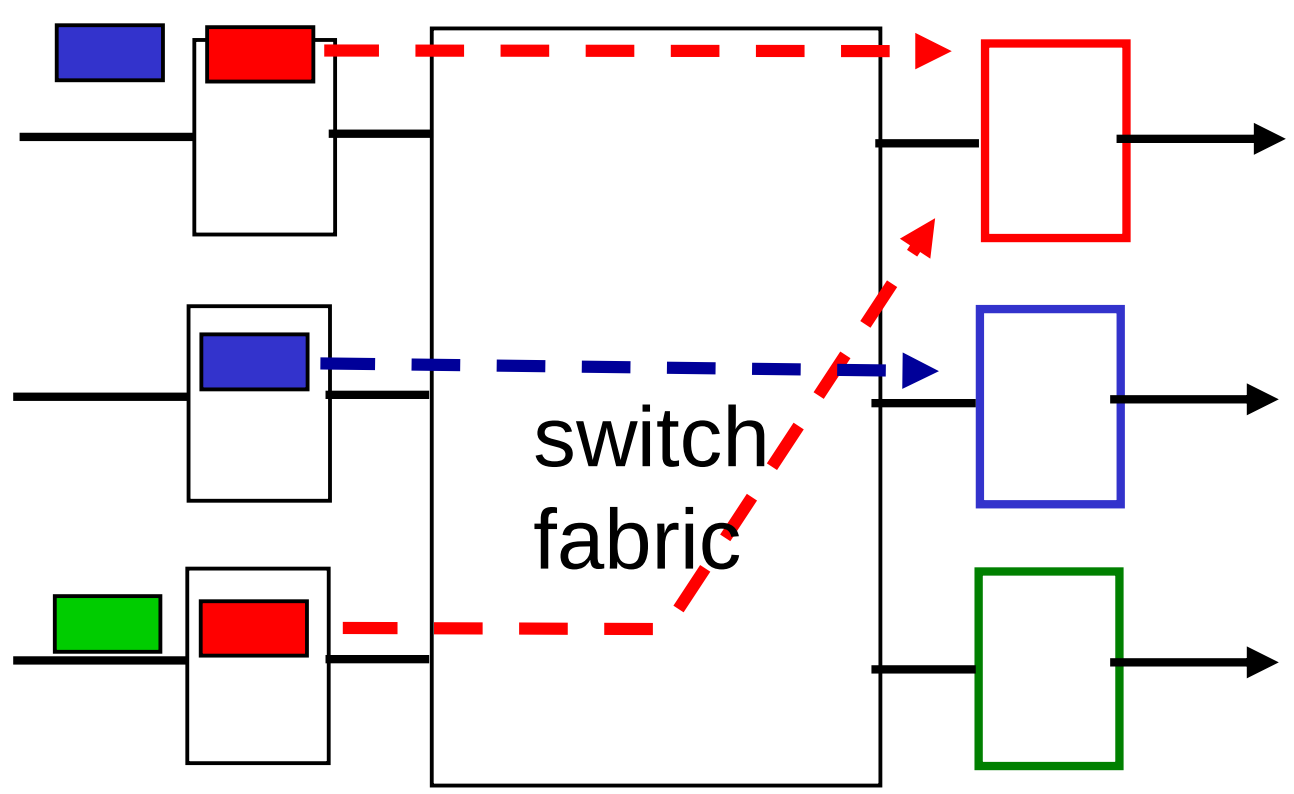

output port contention:
only one red datagram can be transferred.
lower red packet is blocked

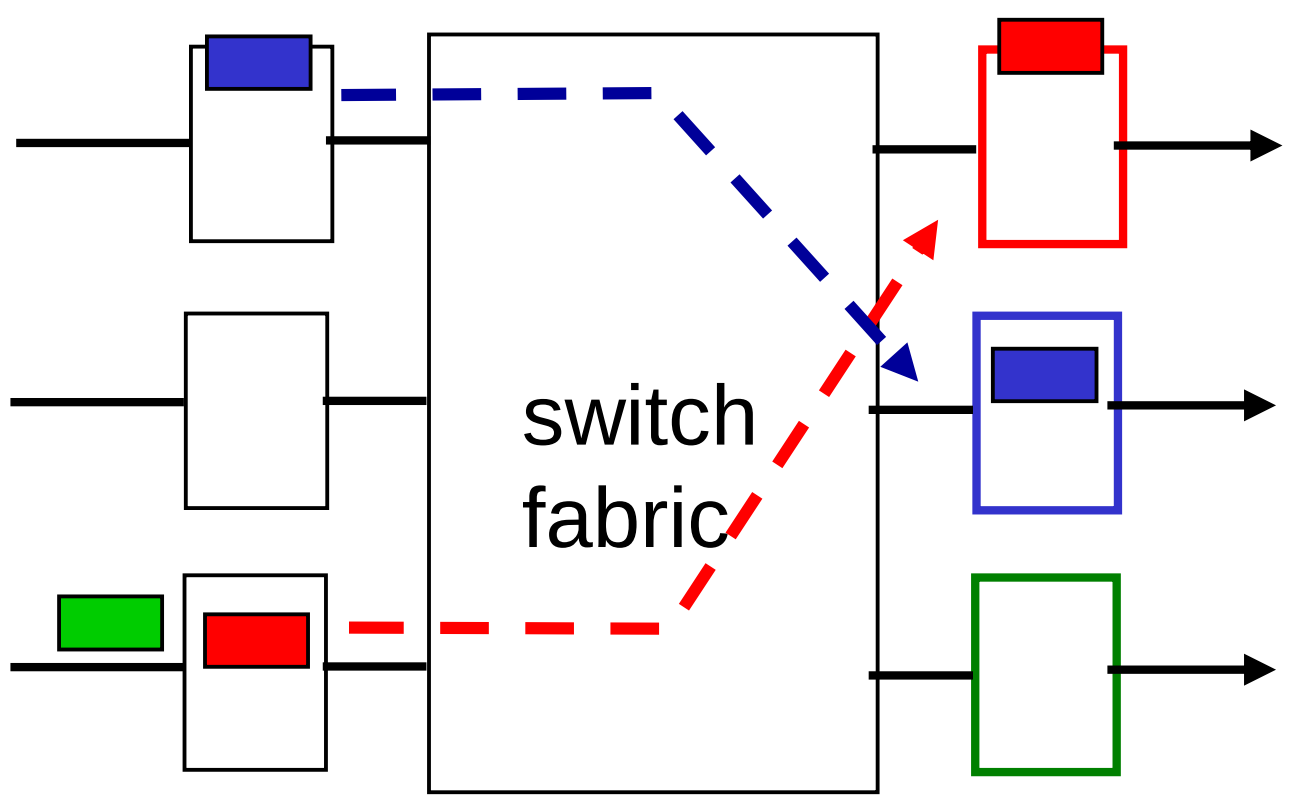

one packet time later:
green packet experiences HOL blocking

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

The Internet network layer

host, router network layer functions:

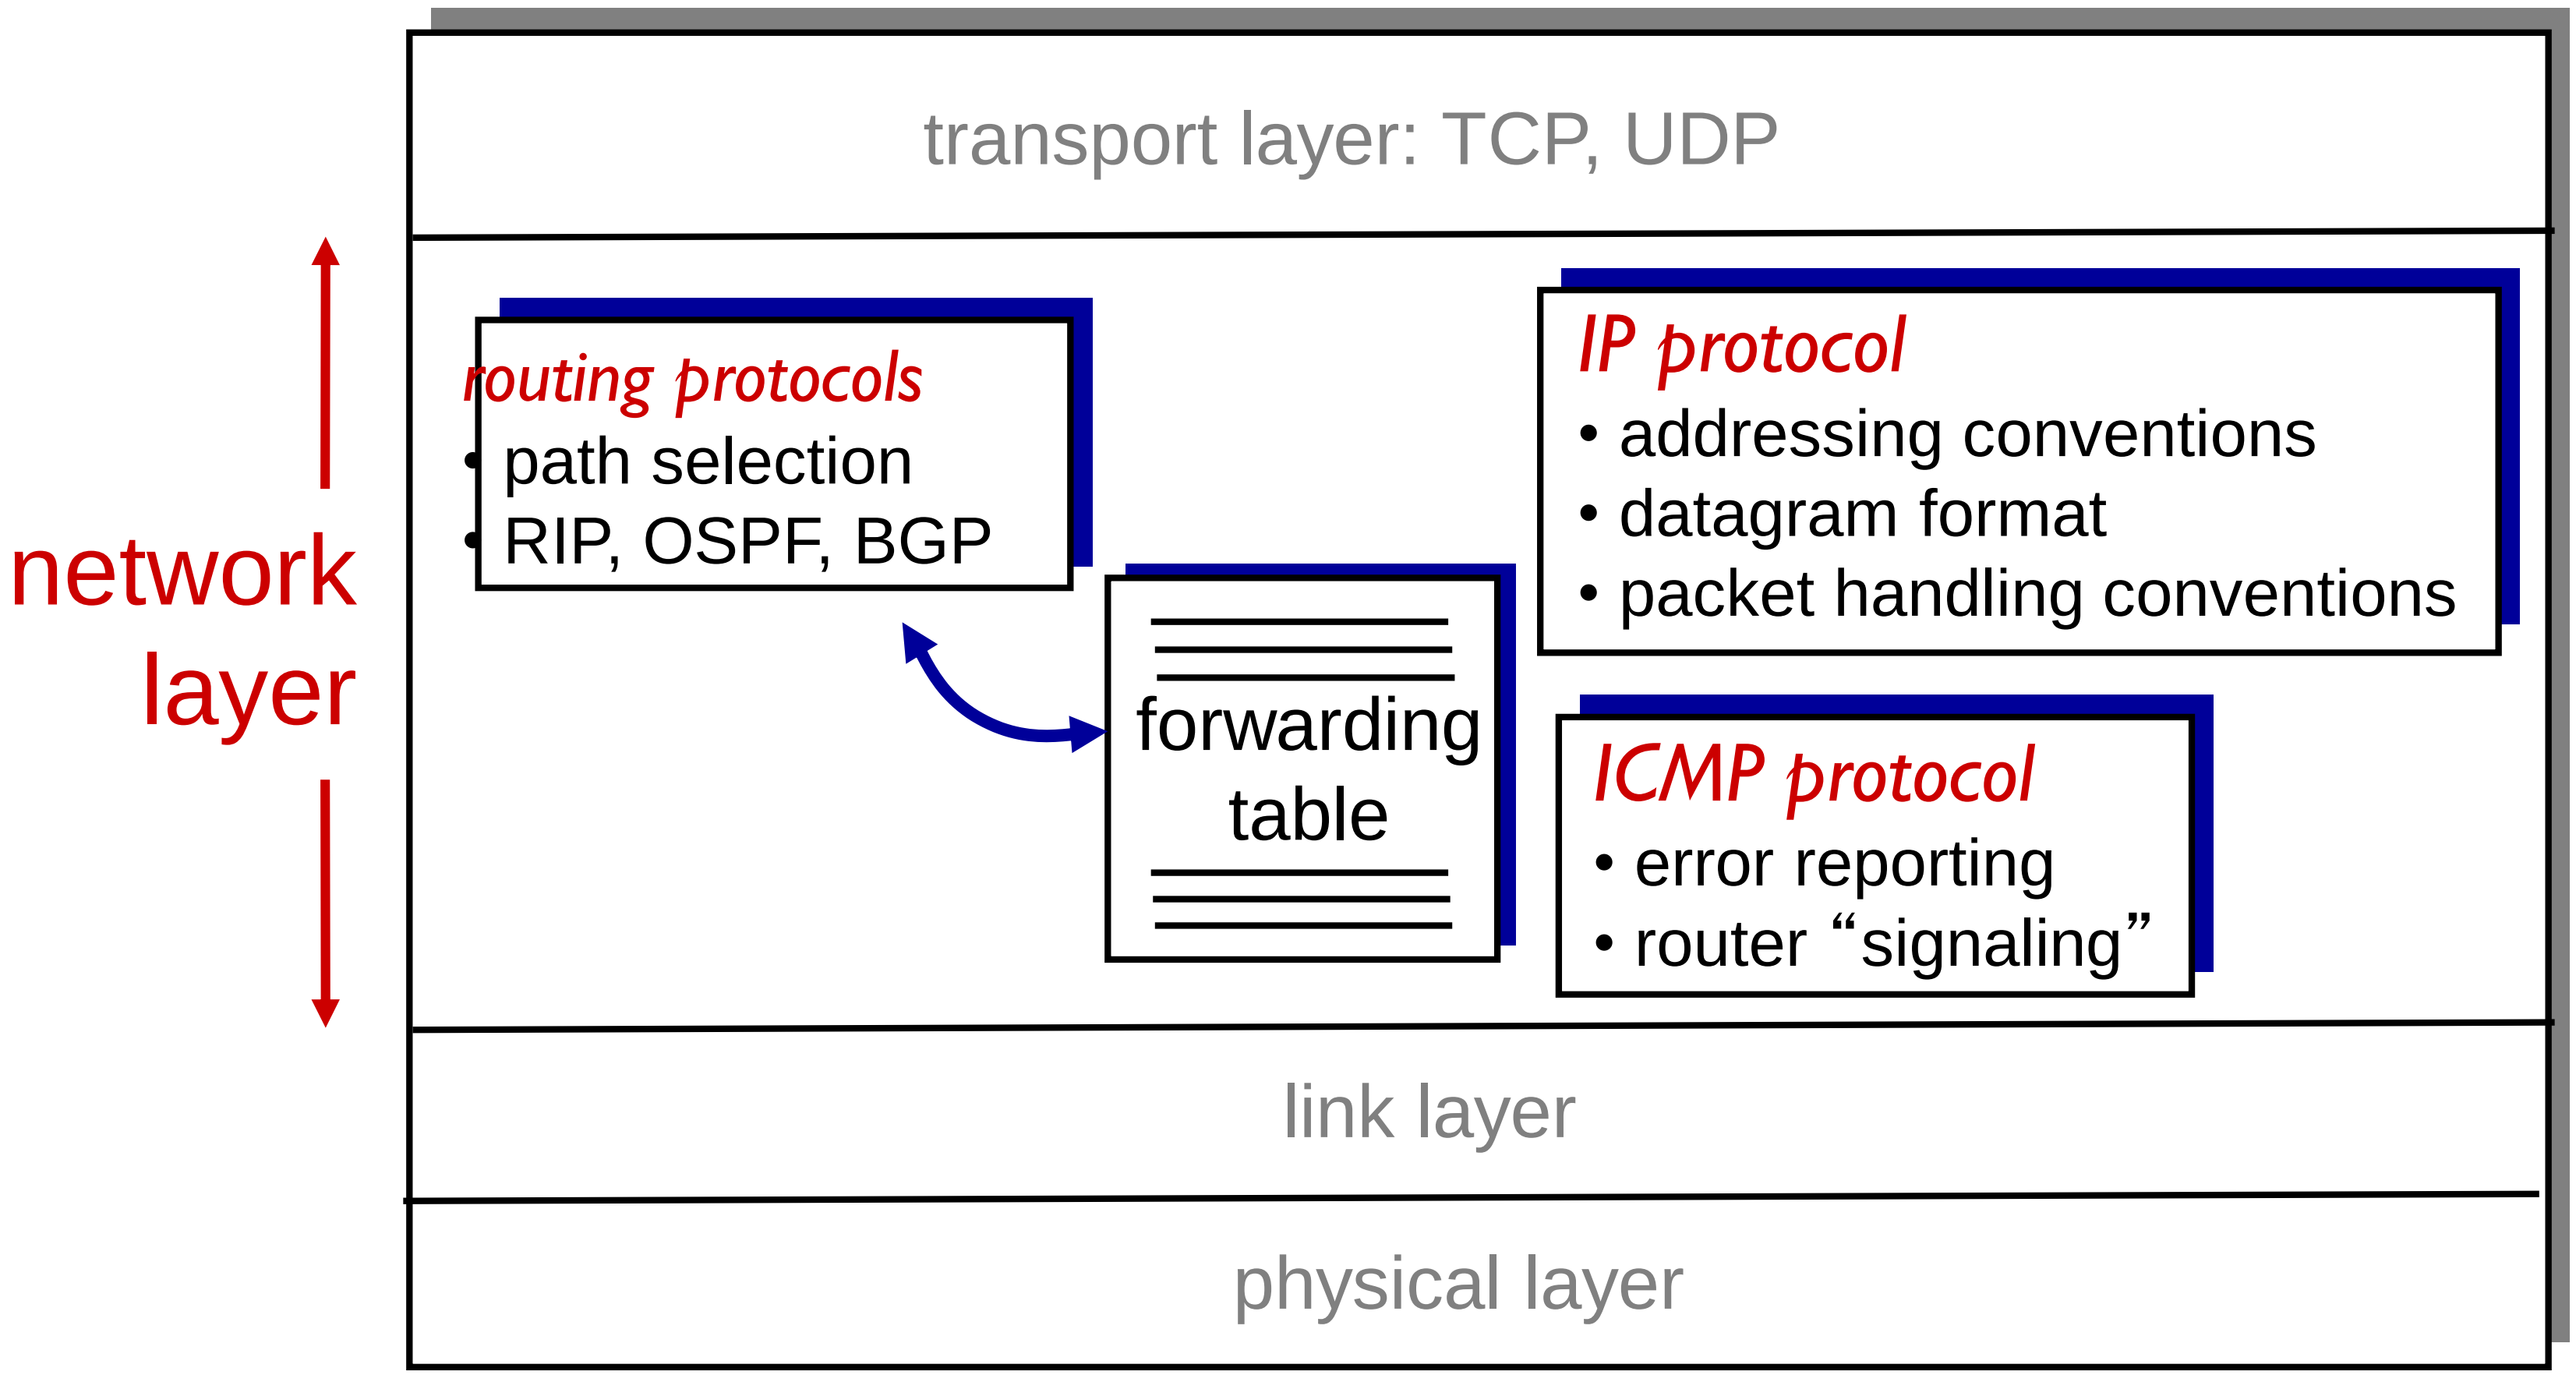

IP datagram format

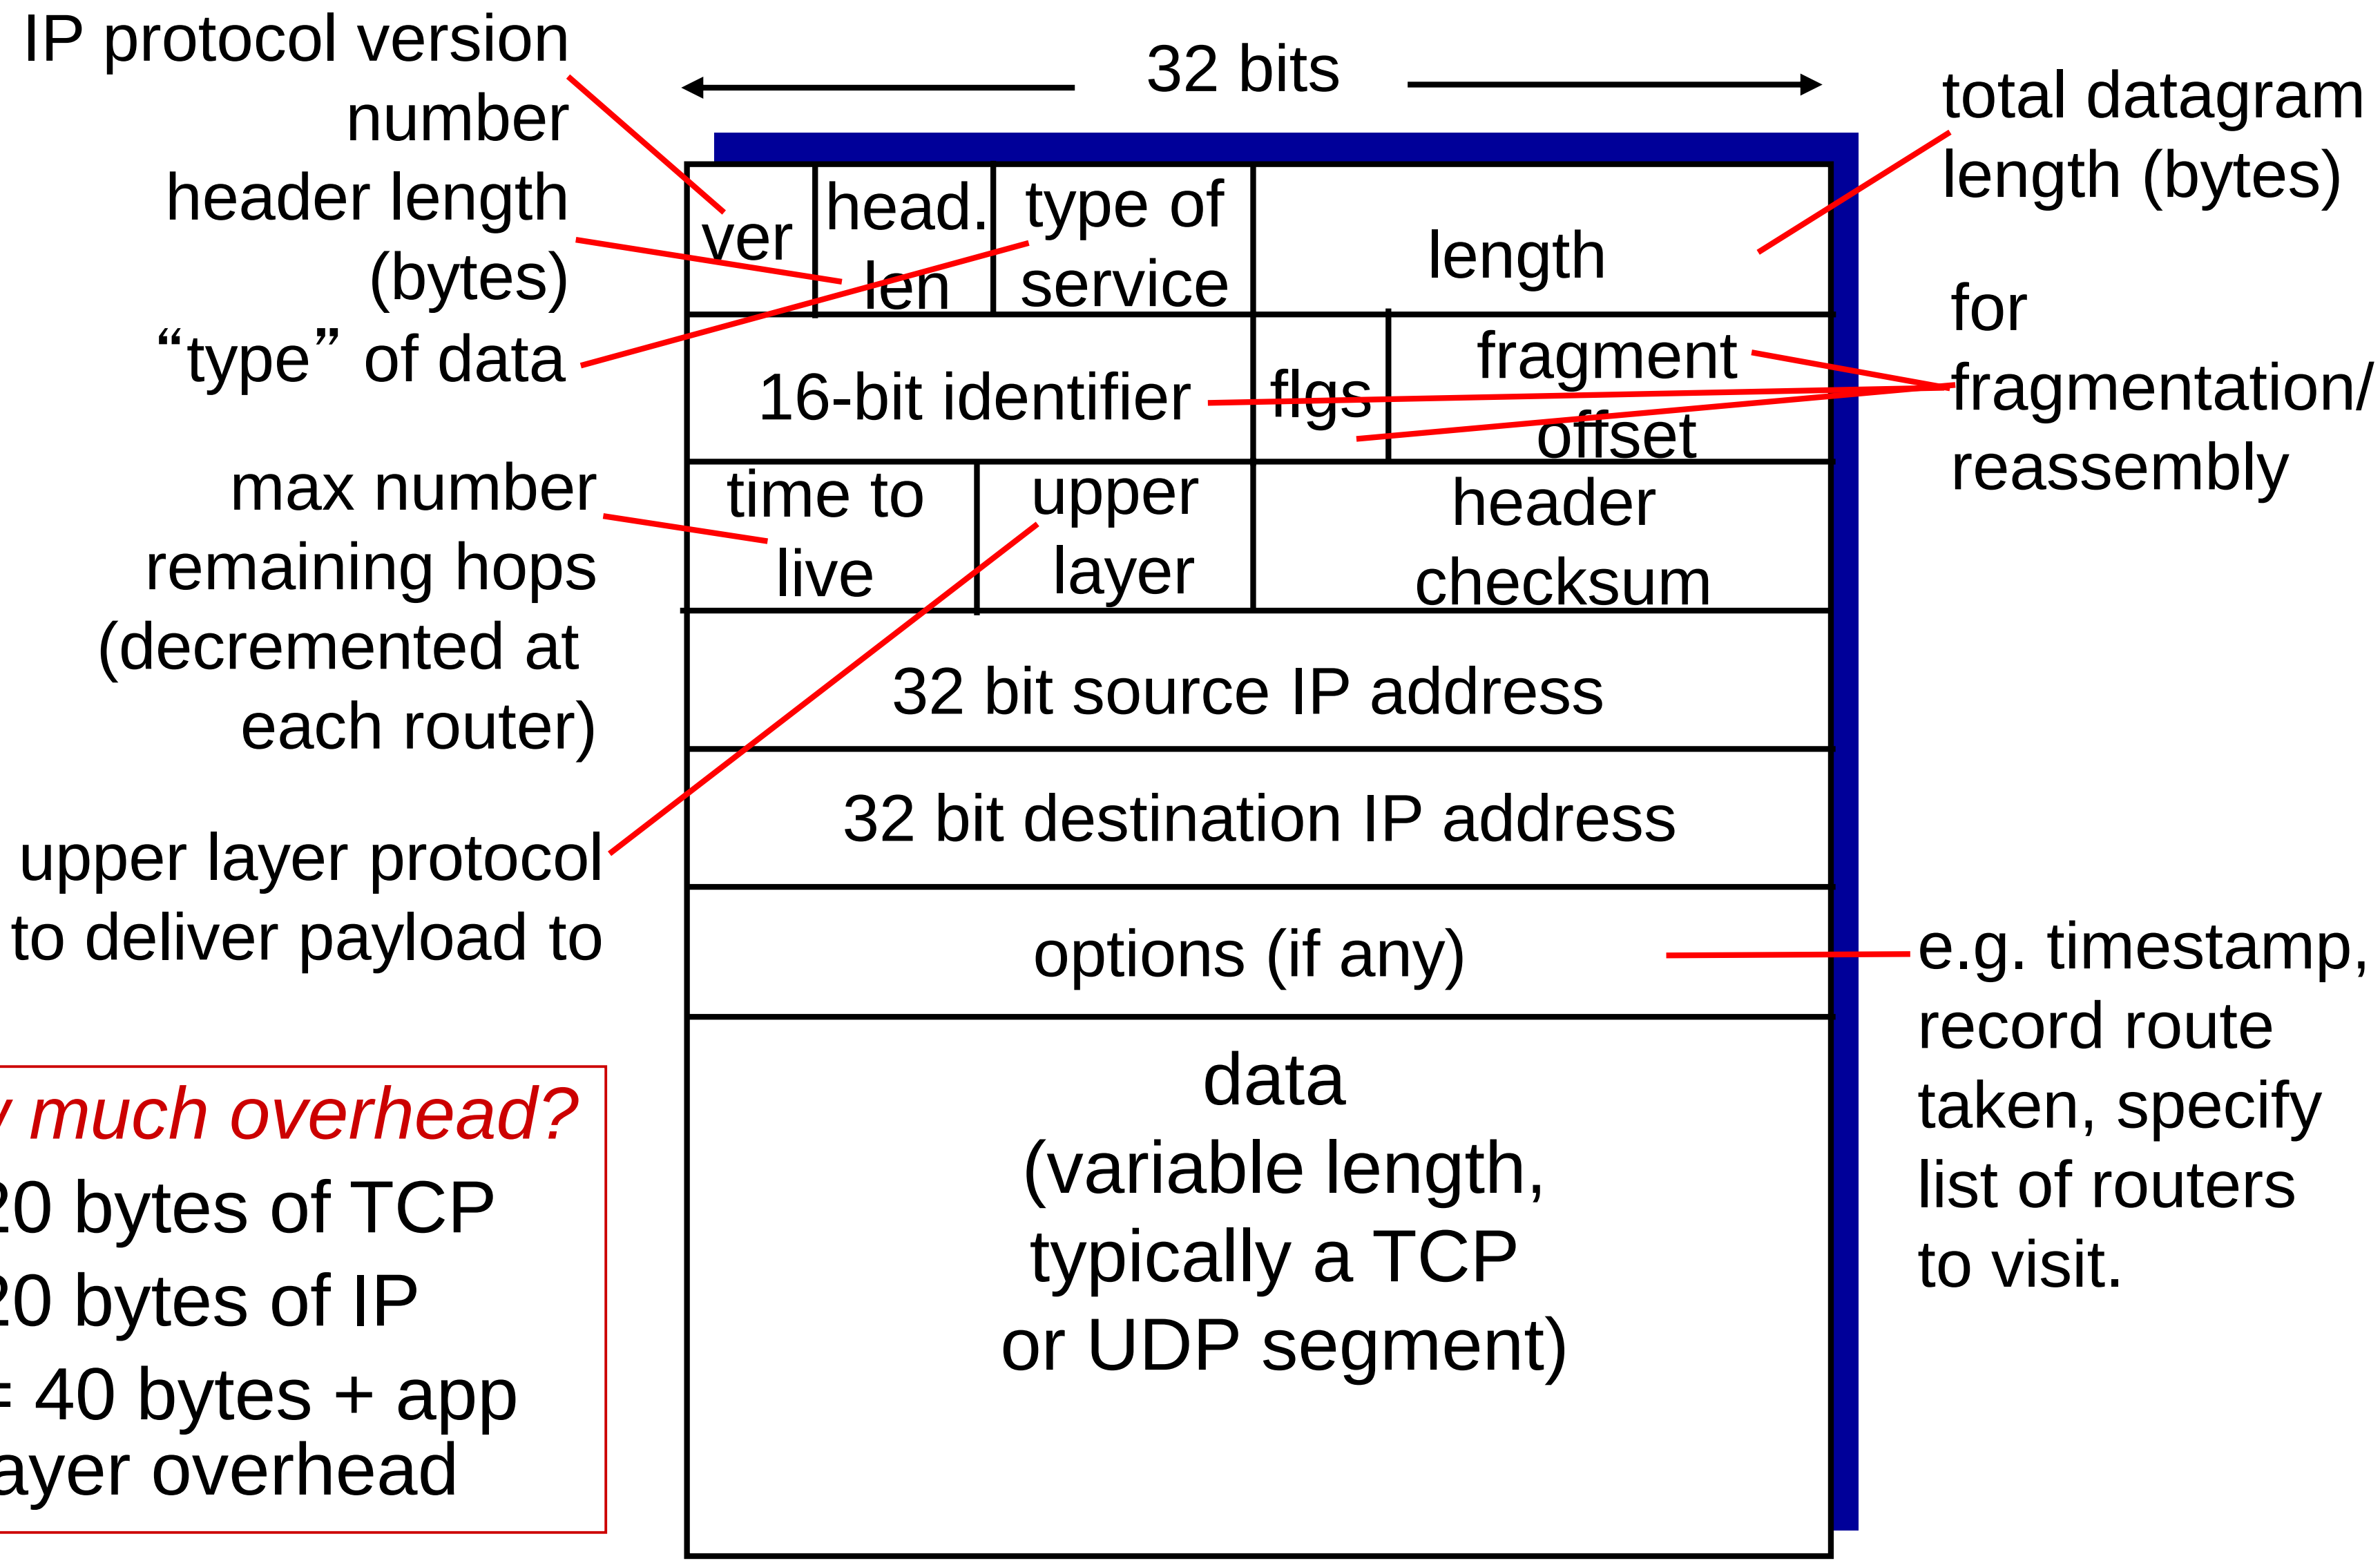

how much overhead?

- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead

IP fragmentation, reassembly

- network links have MTU (max.transfer size) - largest possible link-level frame
  - different link types, different MTUs
- large IP datagram divided ("fragmented") within net
  - one datagram becomes several datagrams
  - "reassembled" only at final destination
  - IP header bits used to identify, order related fragments

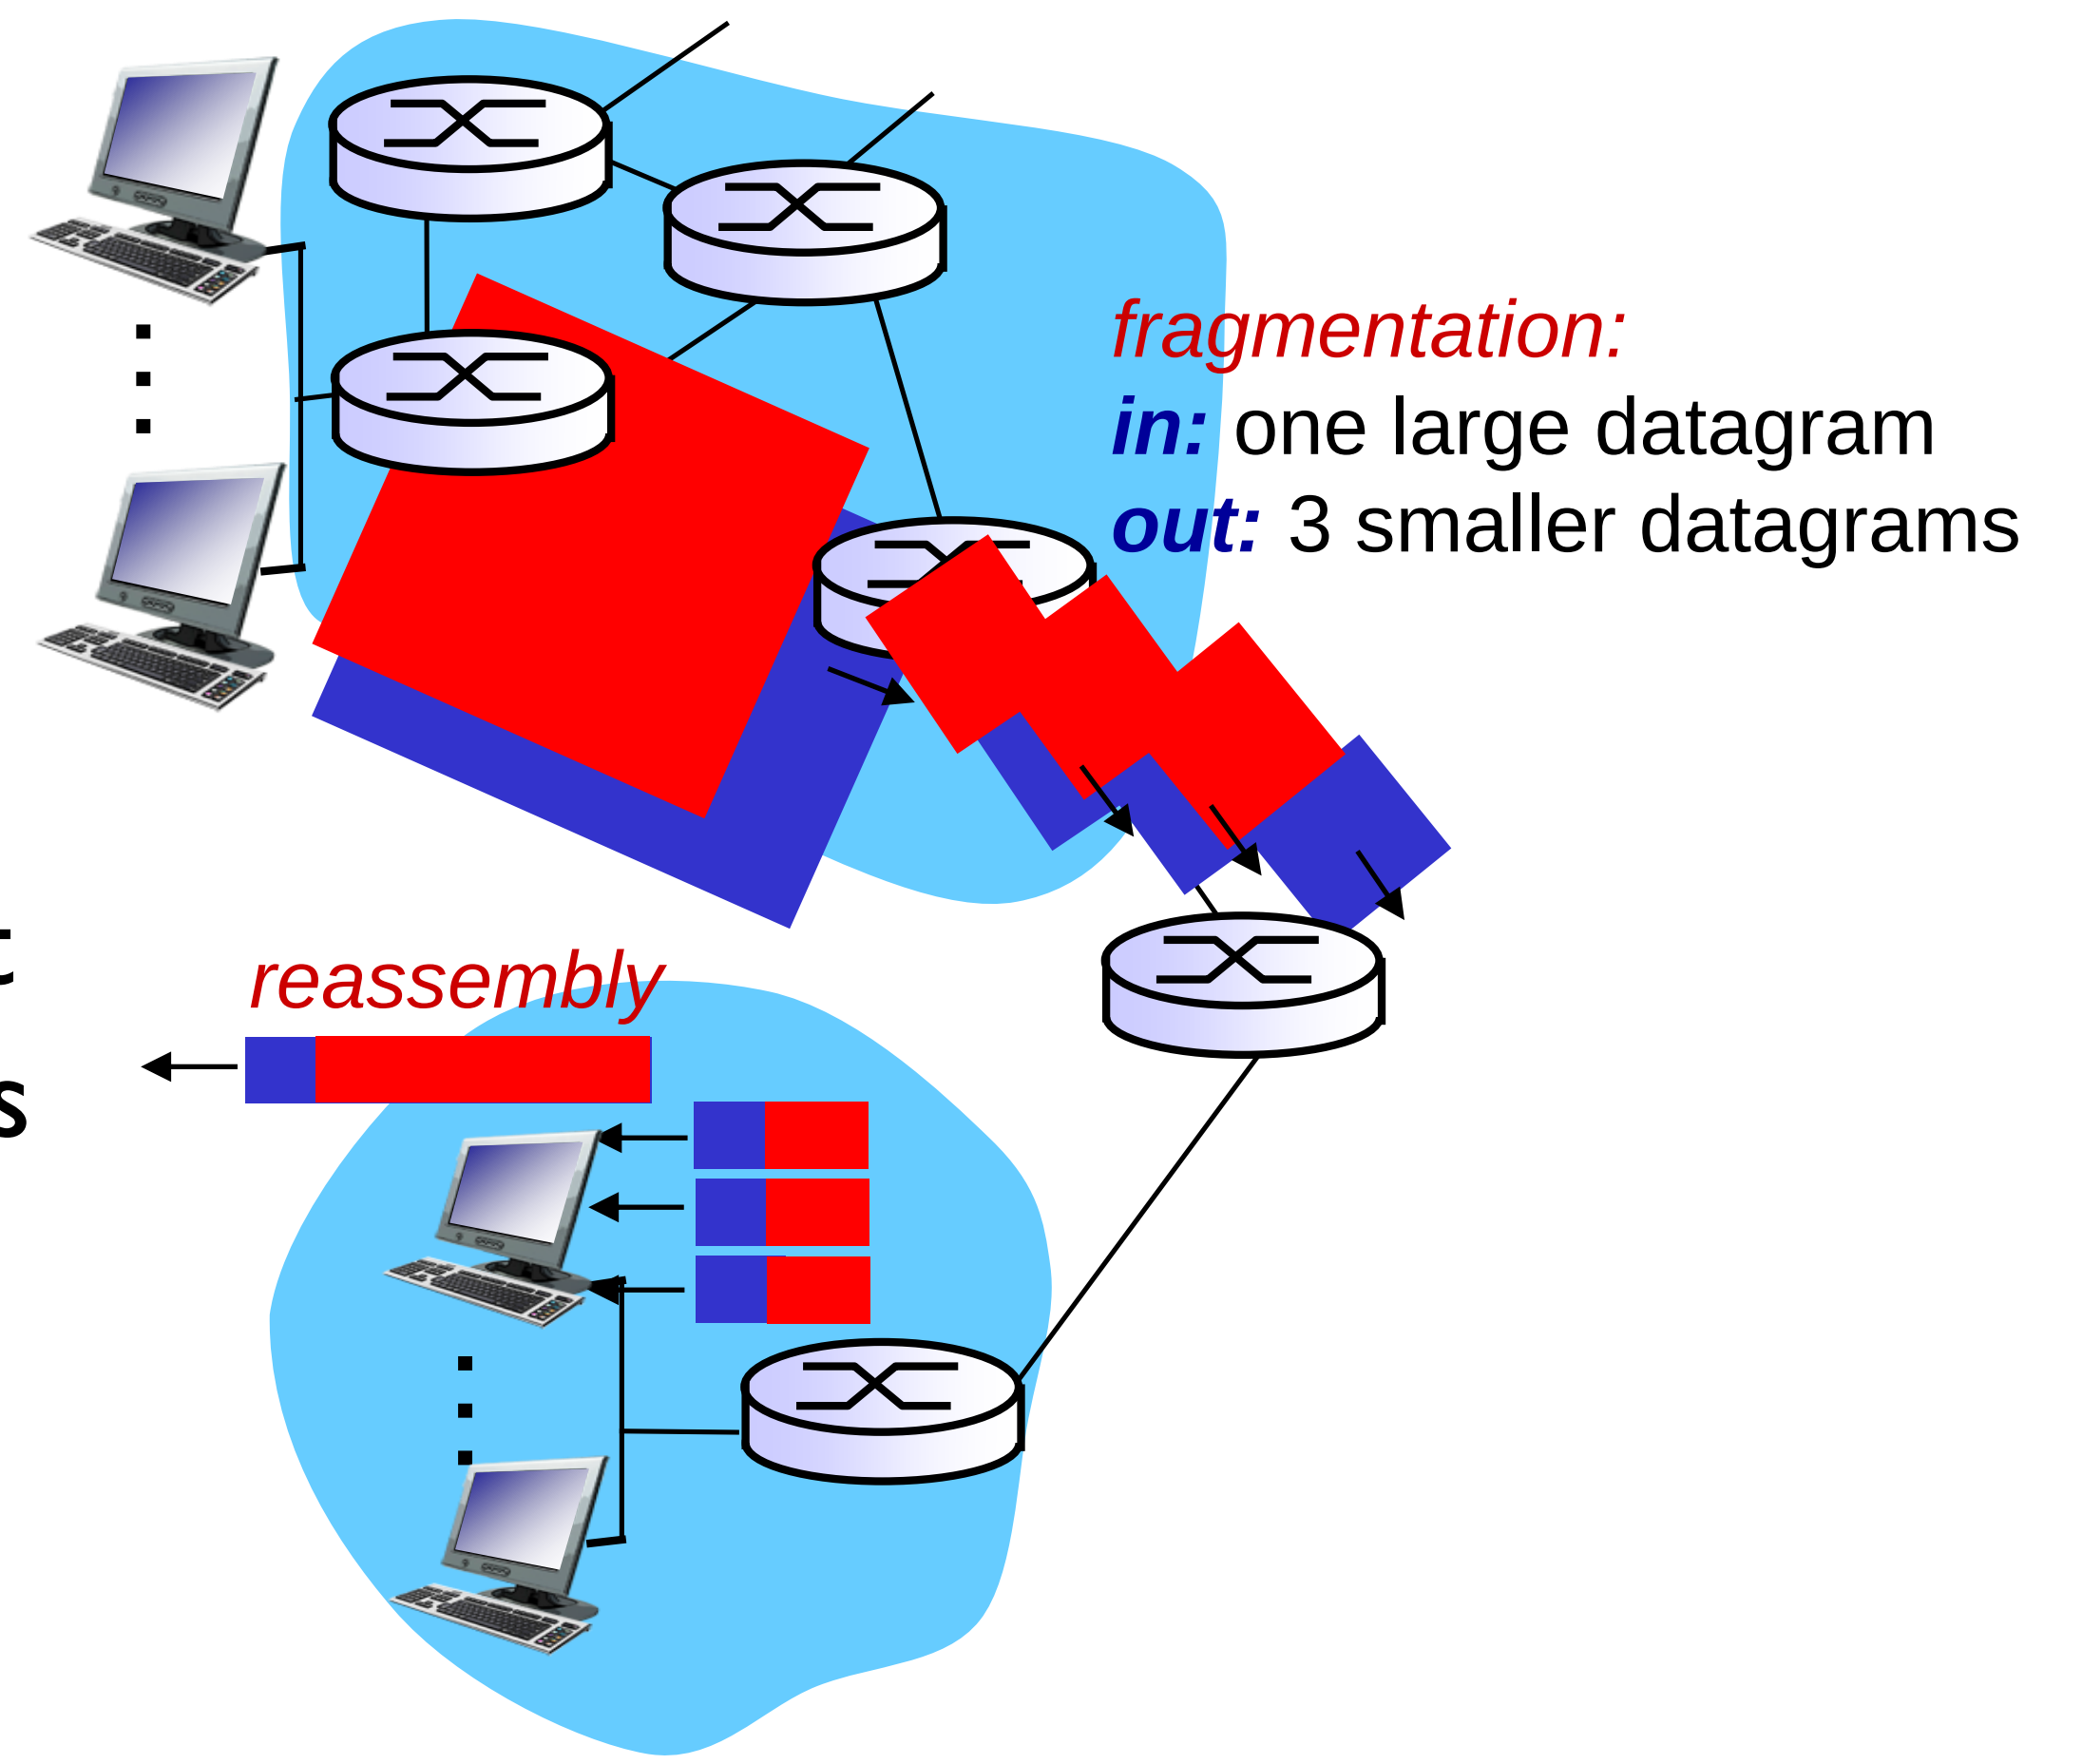

IP fragmentation, reassembly

example:

- 4000 byte datagram
- MTU = 1500 bytes

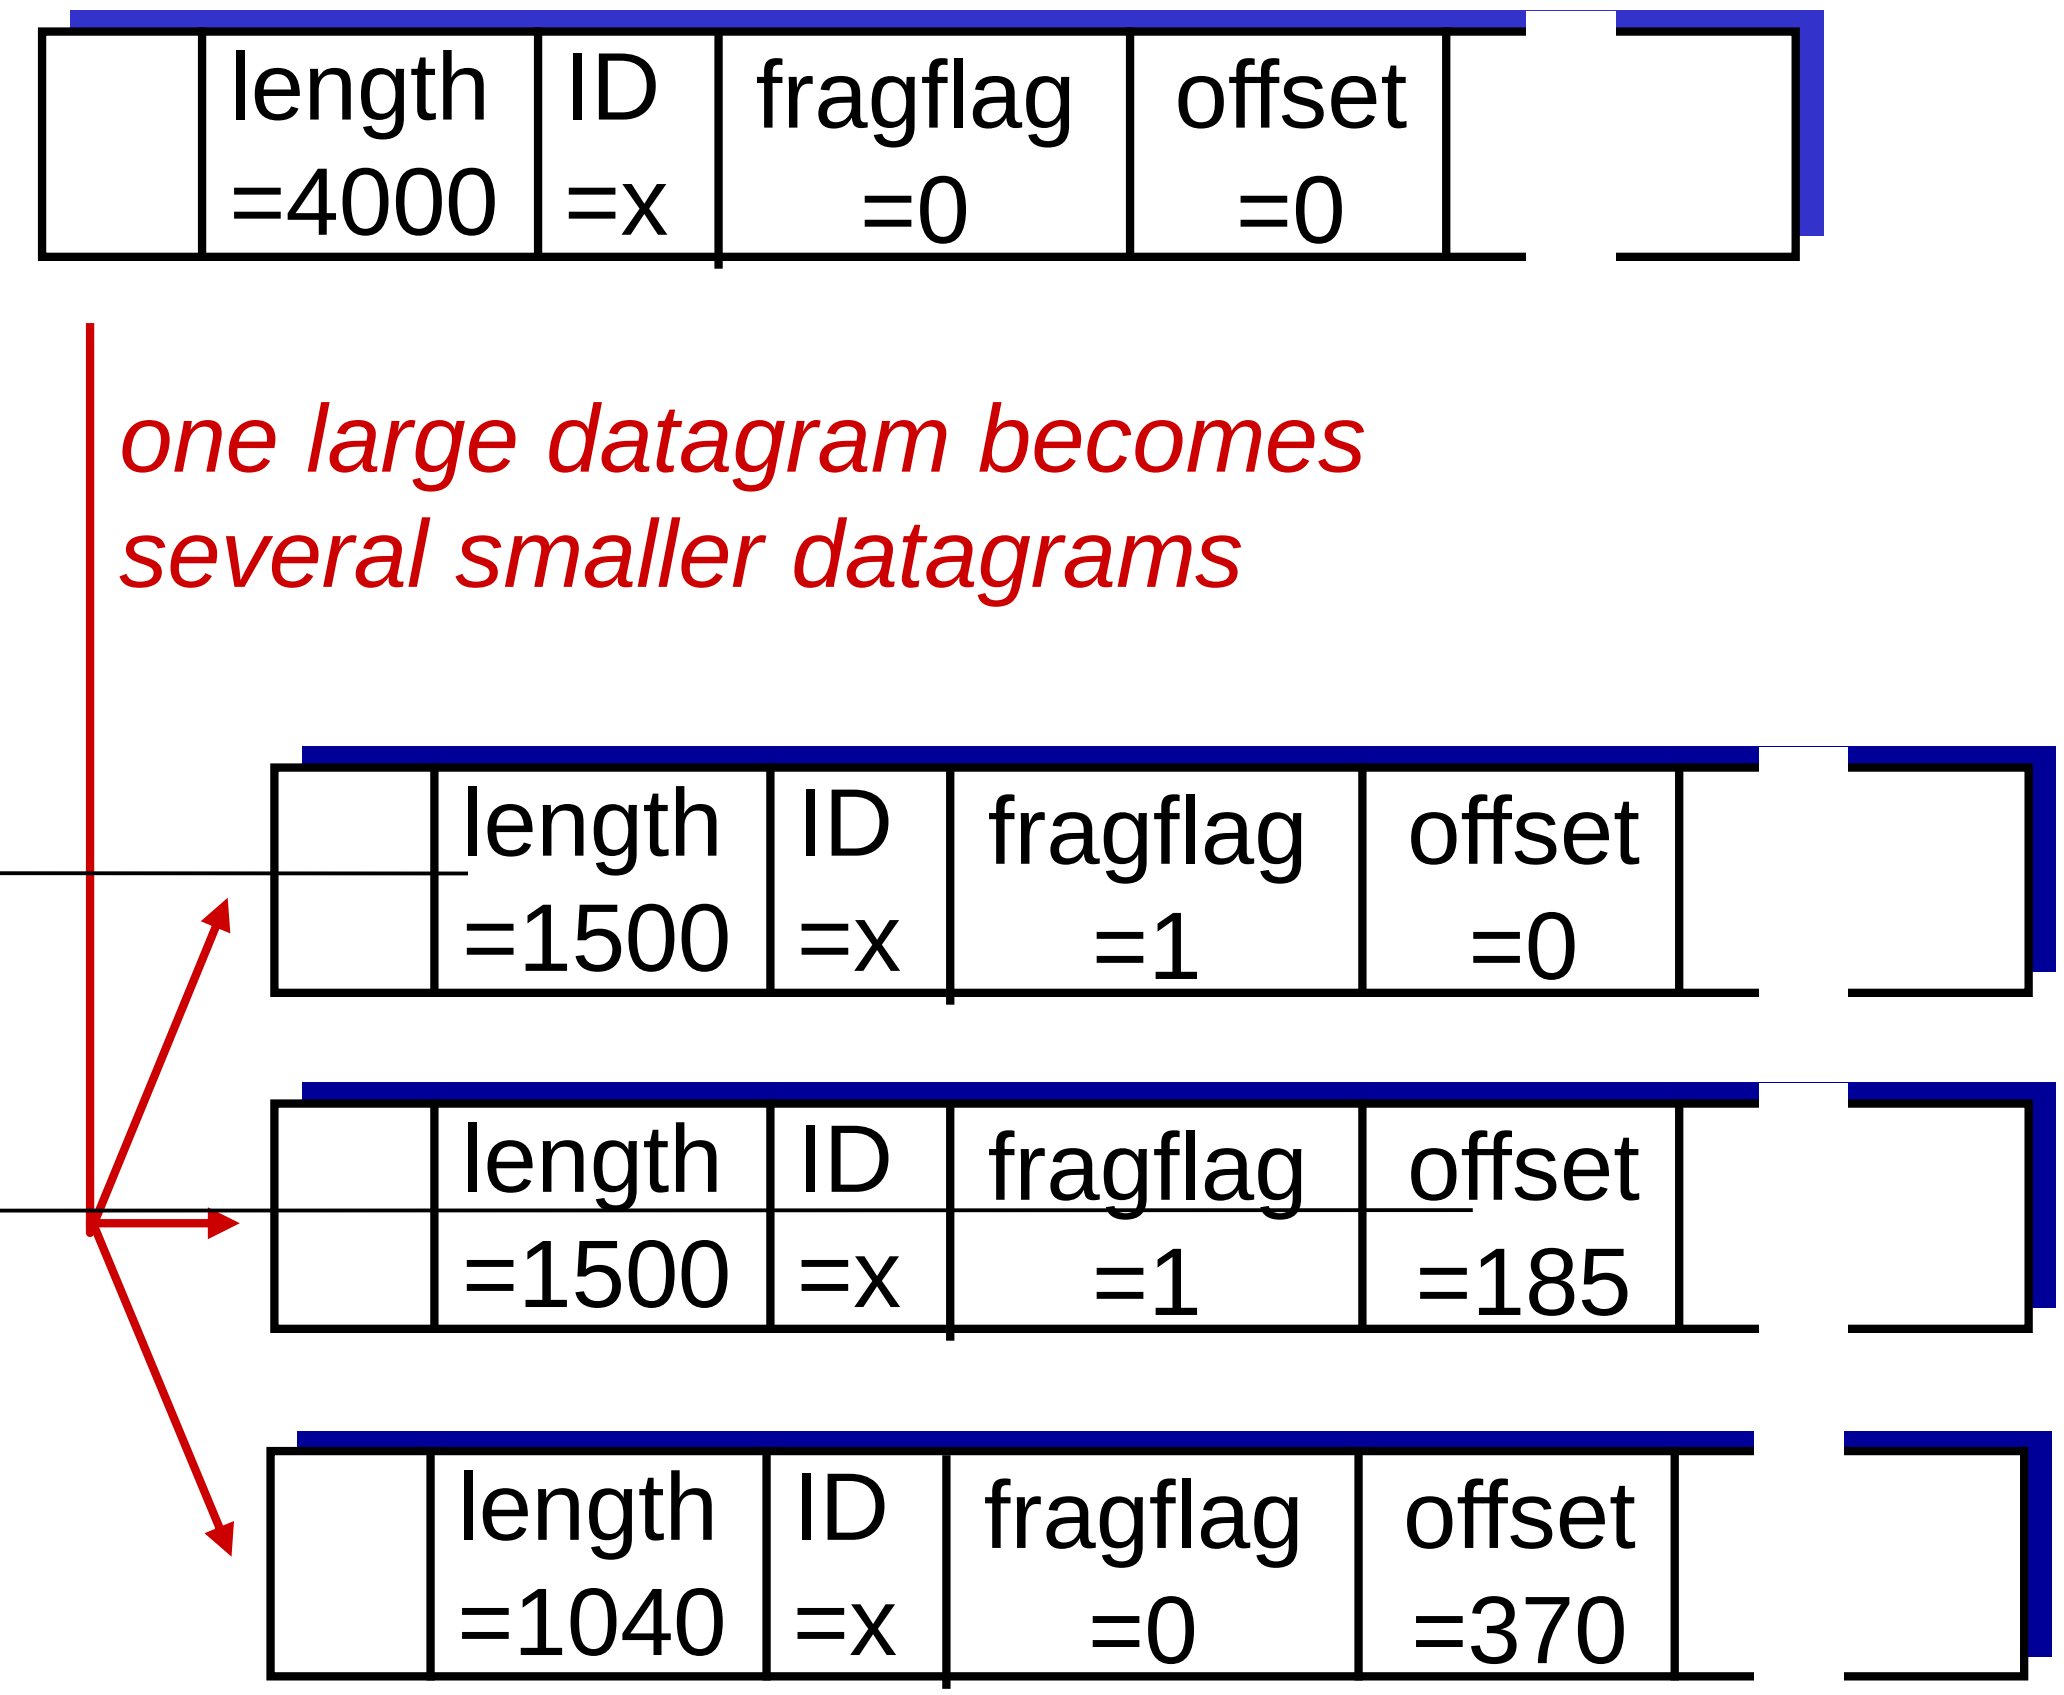

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

IP addressing: introduction

- *IP address:* 32-bit identifier for host, router *interface*
- *interface:* connection between host/router and physical link
  - routers typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)
- *IP addresses associated with each interface*

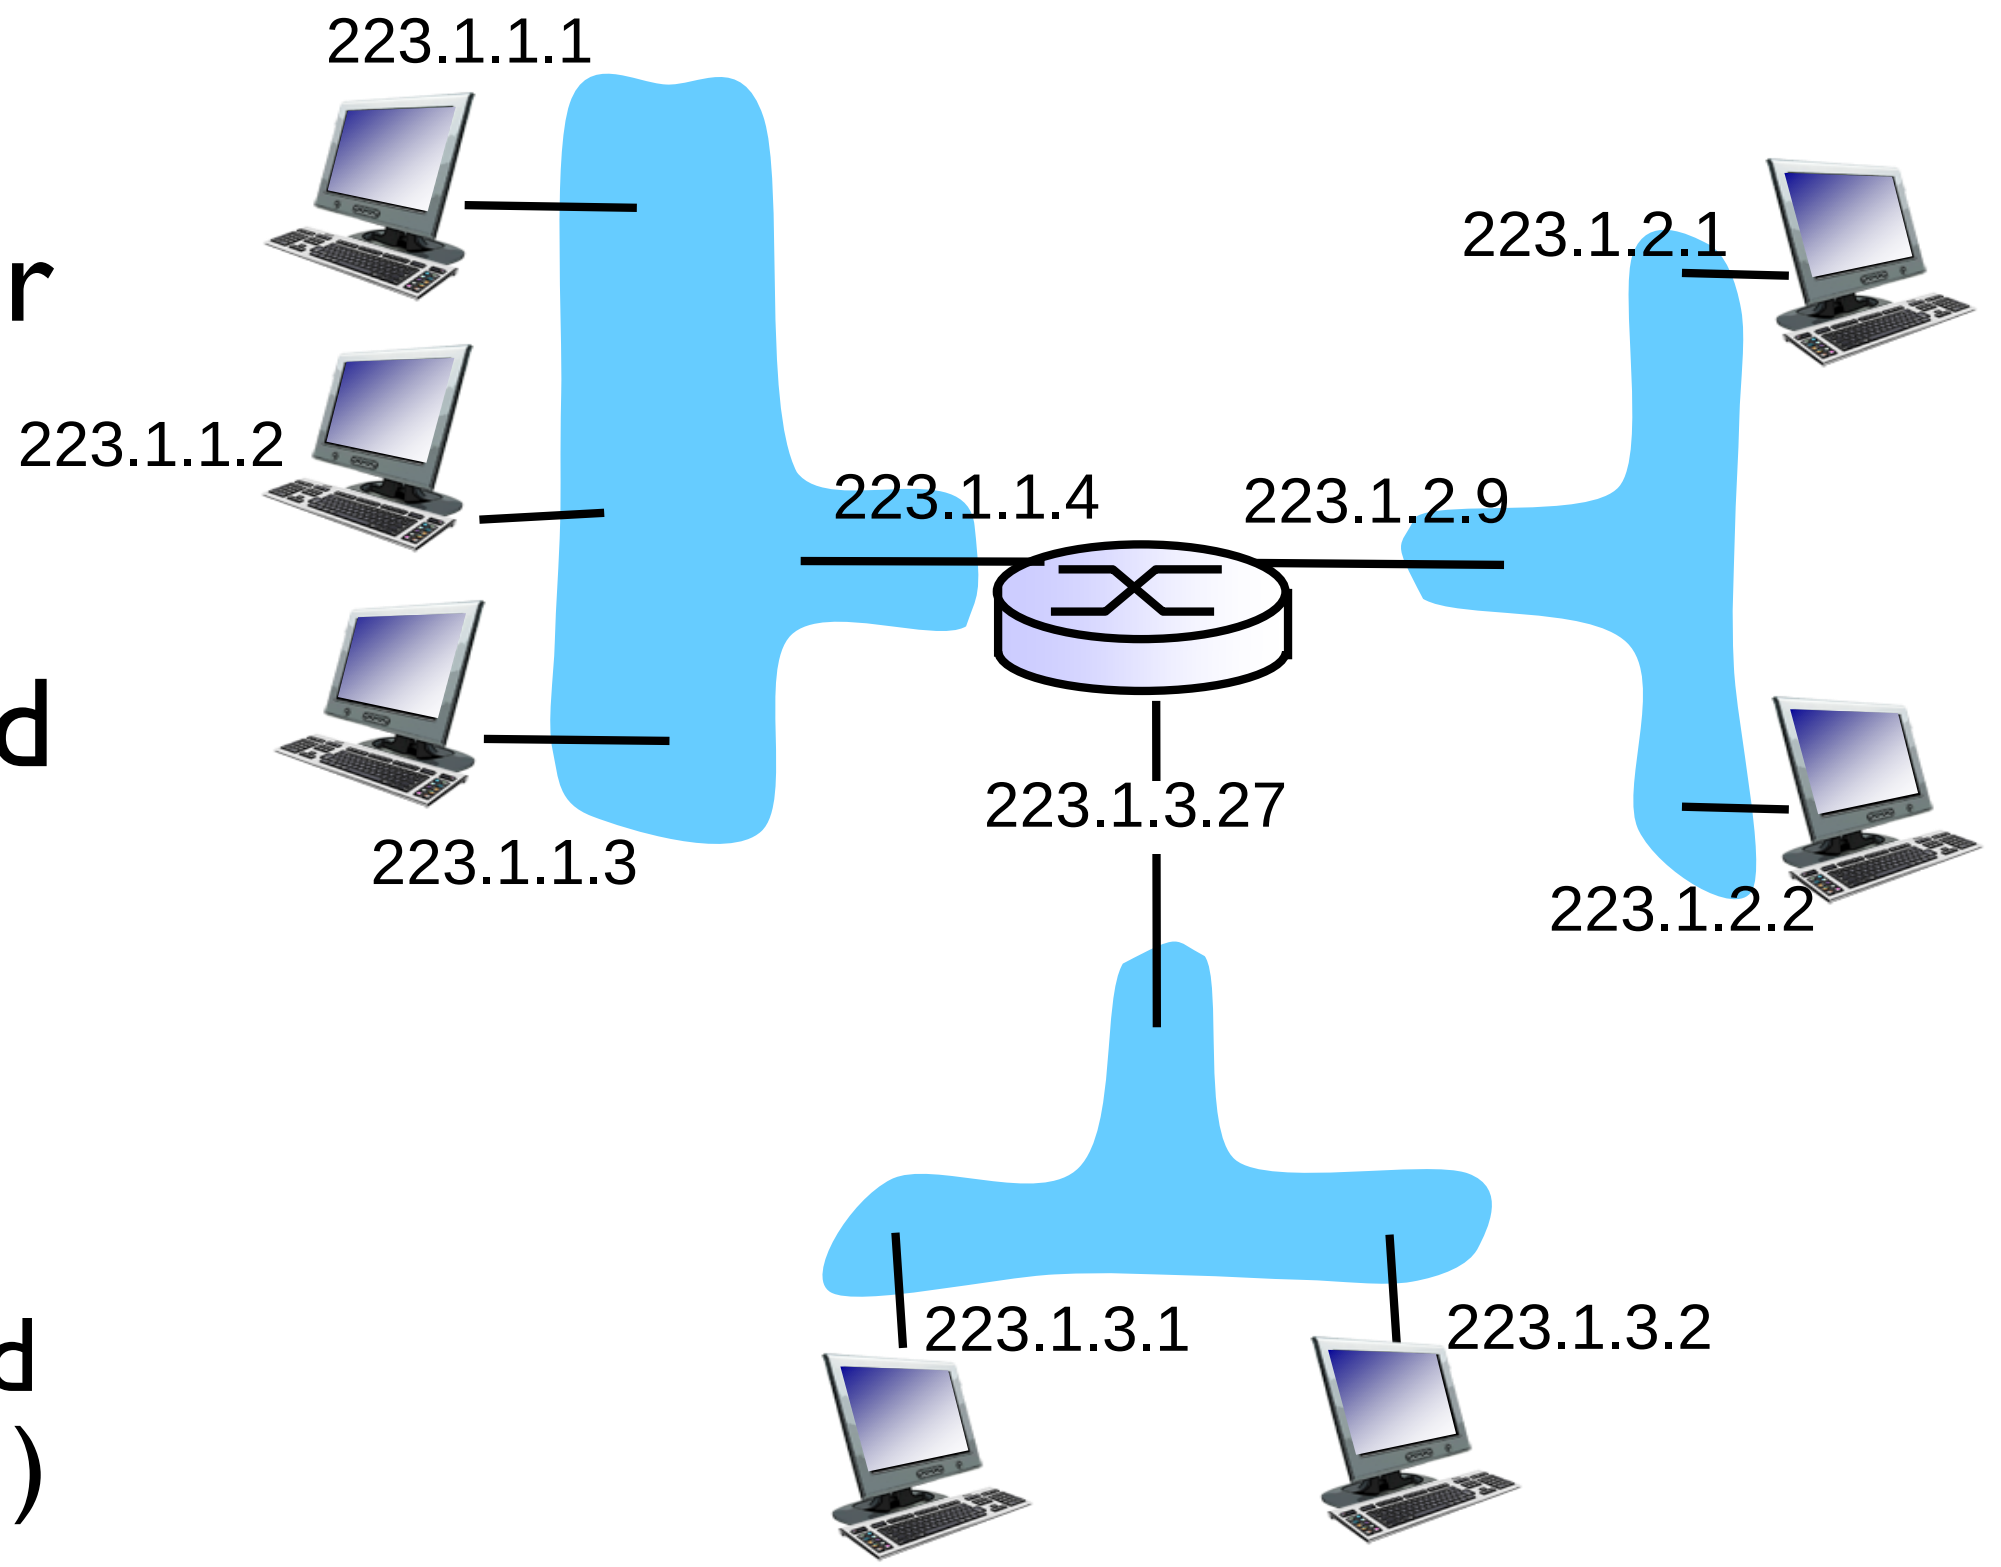

$$223.1.1.1 = \underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$$

IP addressing: introduction

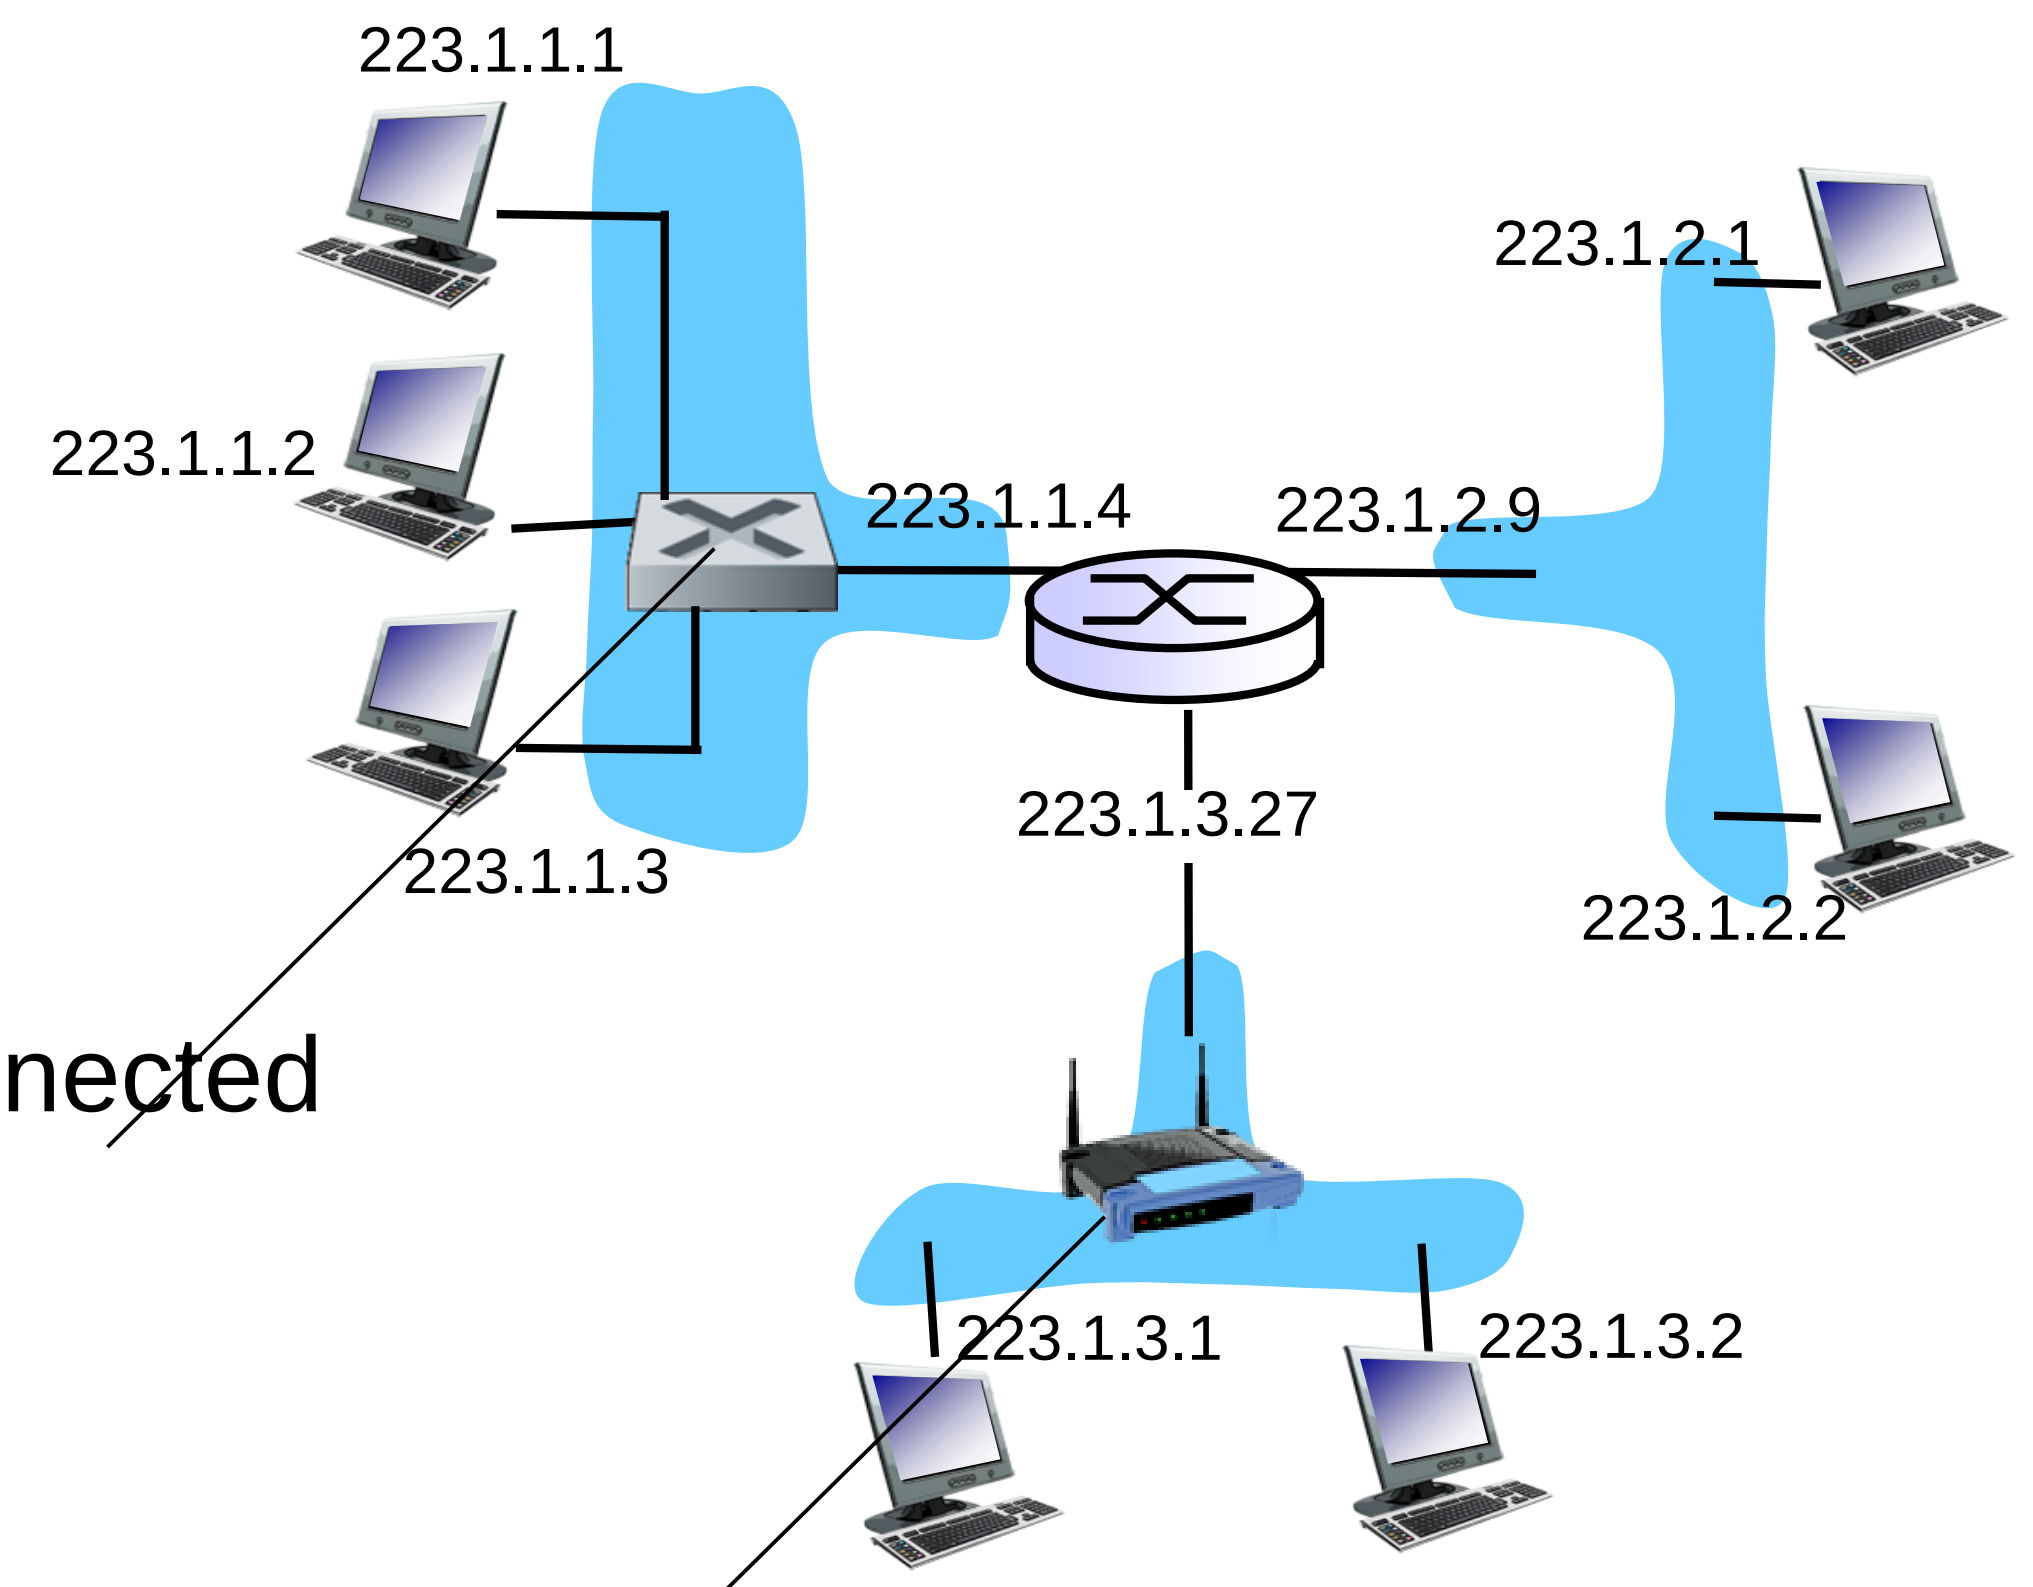

wired Ethernet interfaces connected by Ethernet switches

A: wireless WiFi interfaces connected by WiFi base station

Subnets

- IP address:
  - subnet part - high order bits
  - host part - low order bits
- *what's a subnet ?*
  - device interfaces with same subnet part of IP address
  - can physically reach each other *without intervening router*

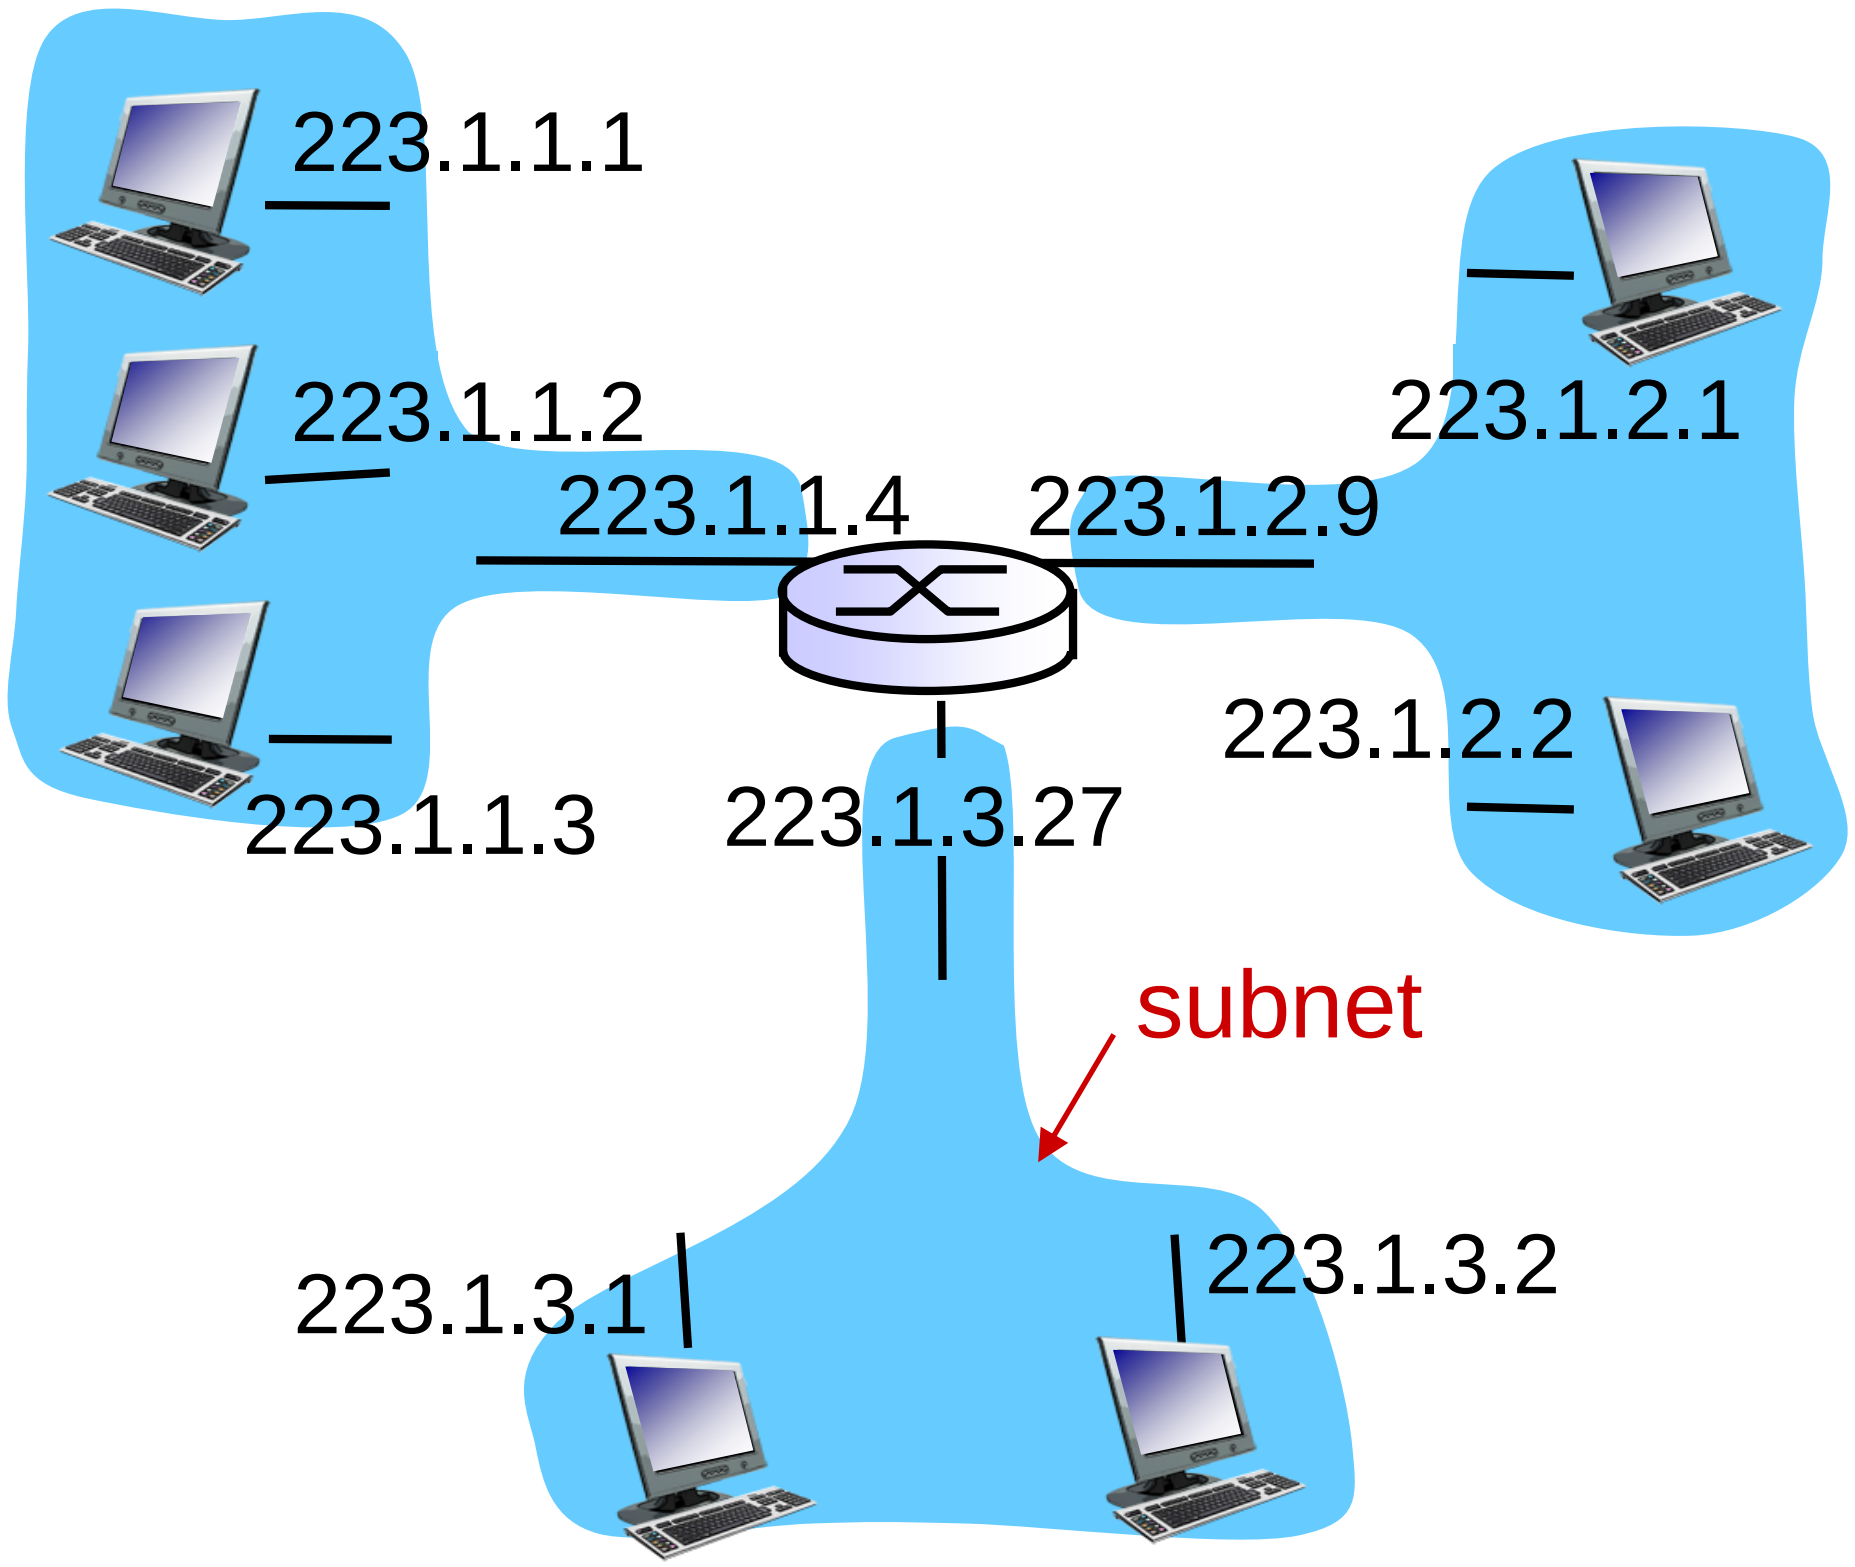

network consisting of 3 subnets

Subnets

recipe

- to determine the subnets, detach each interface from its host or router, creating islands of isolated networks
- each isolated network is called a *subnet*

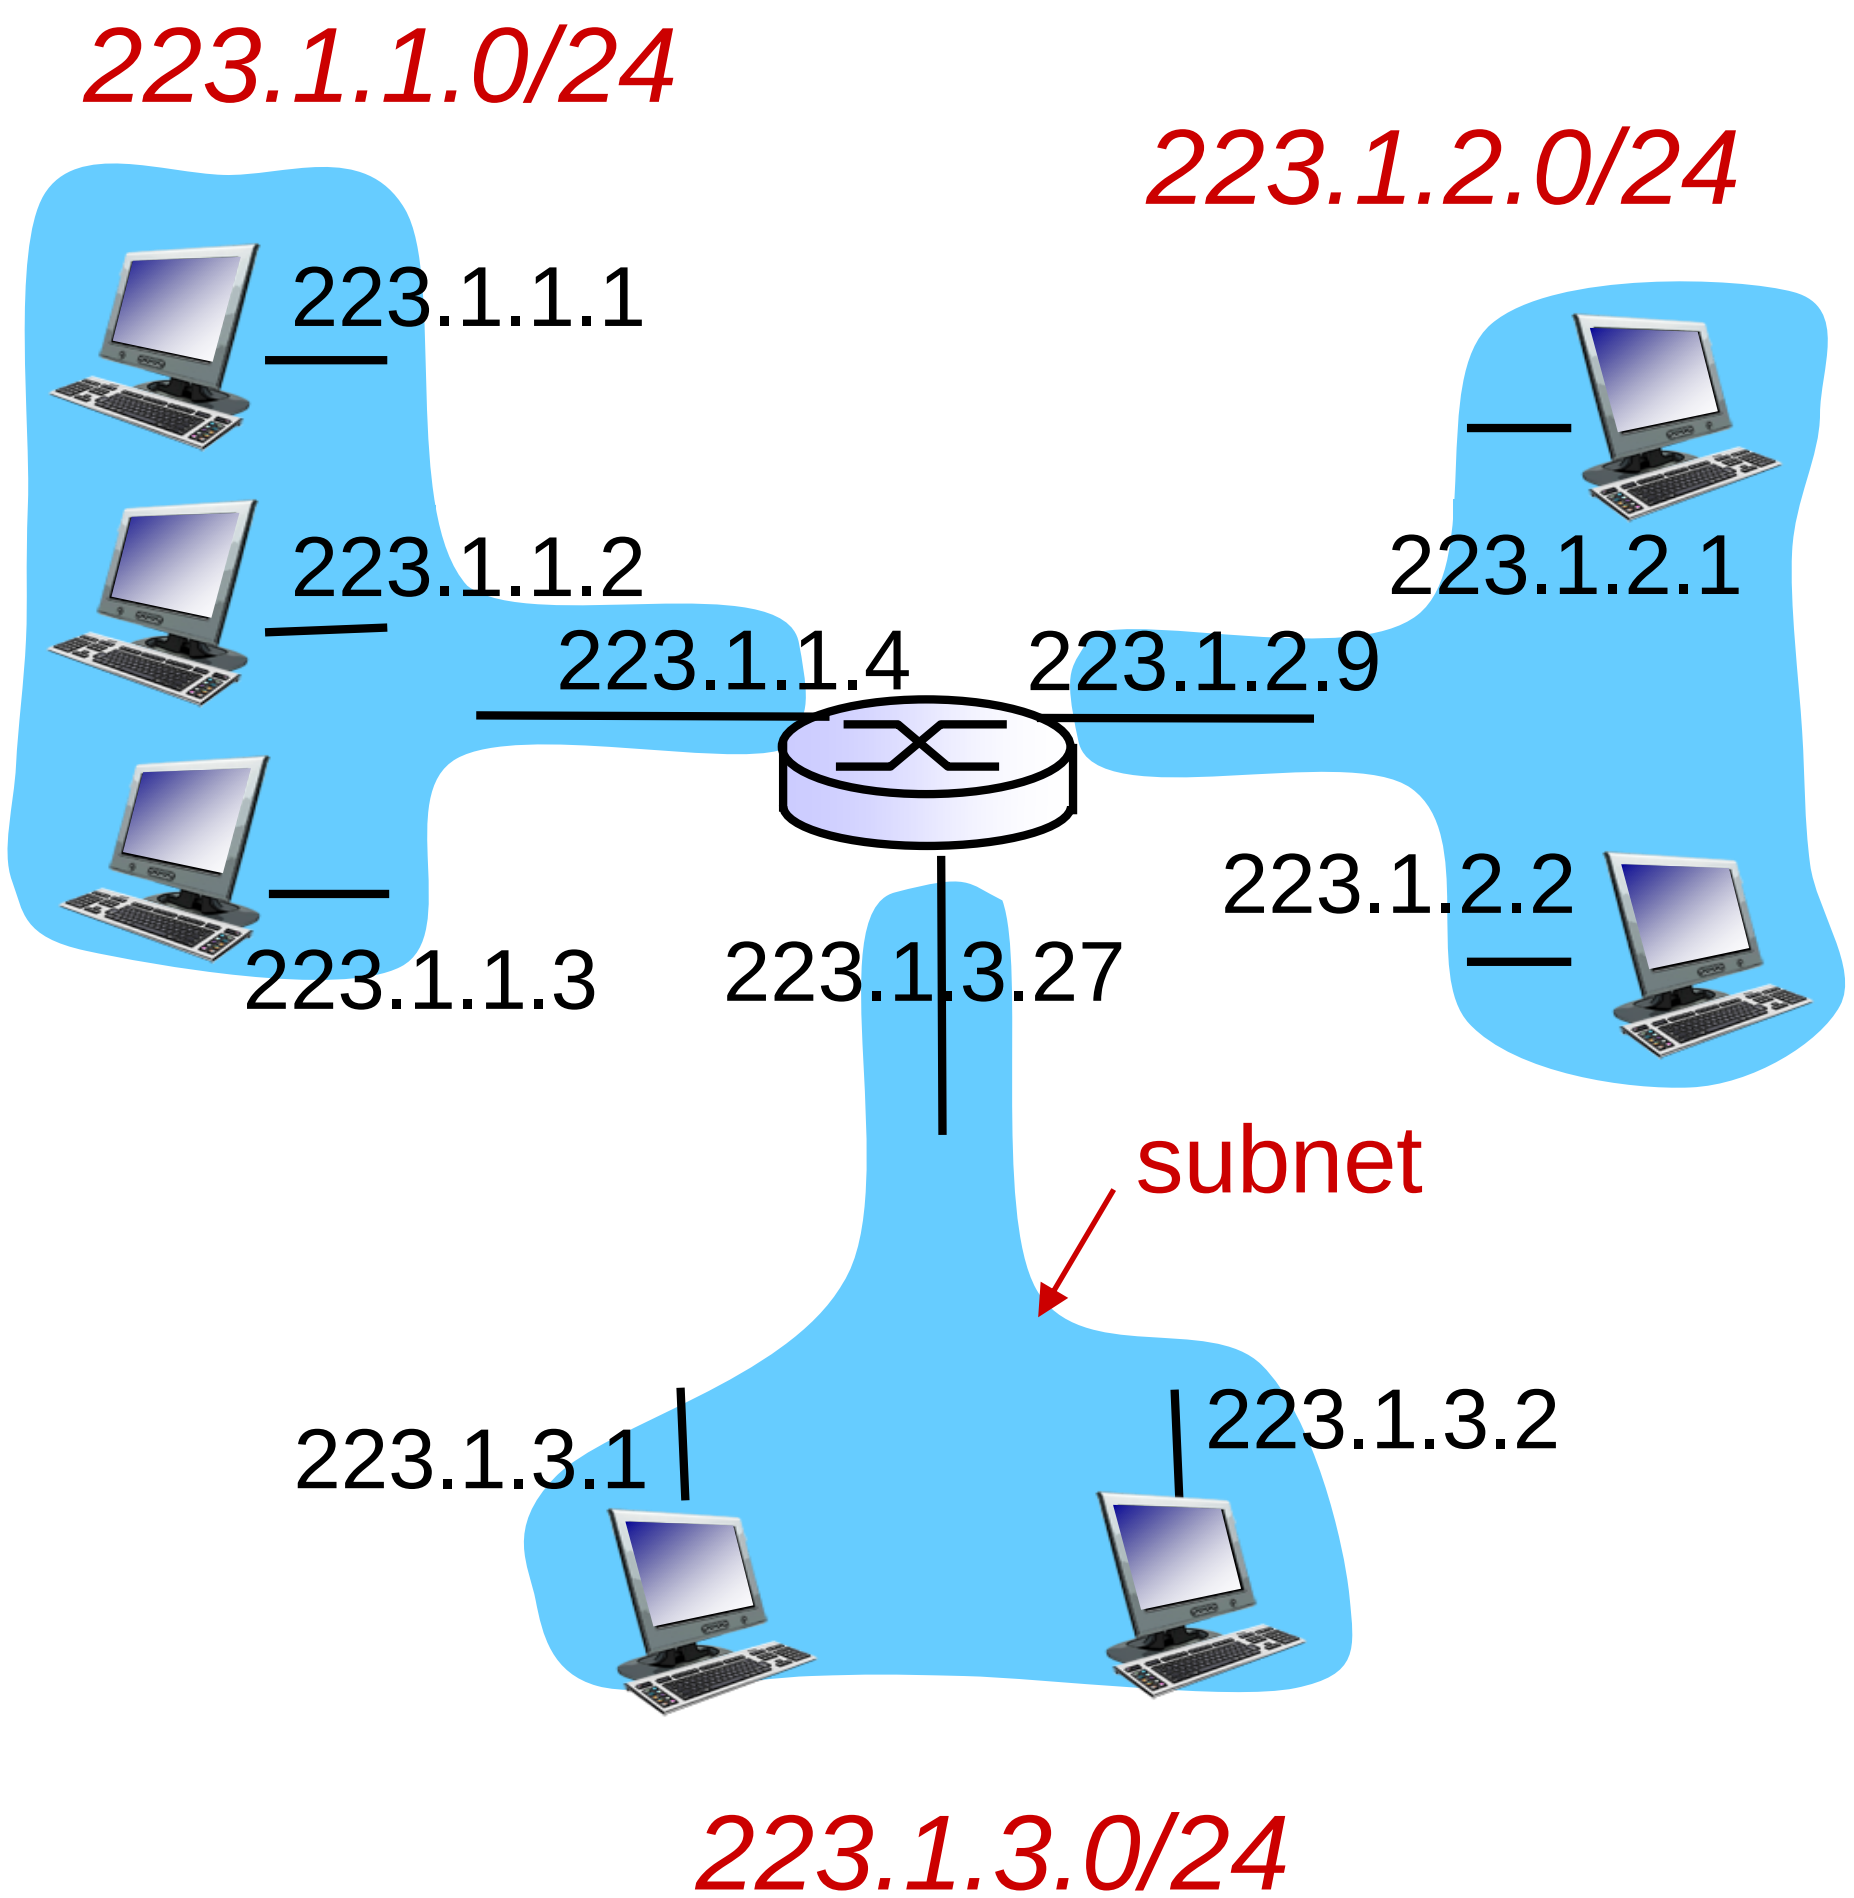

subnet mask: /24

Subnets

how many?

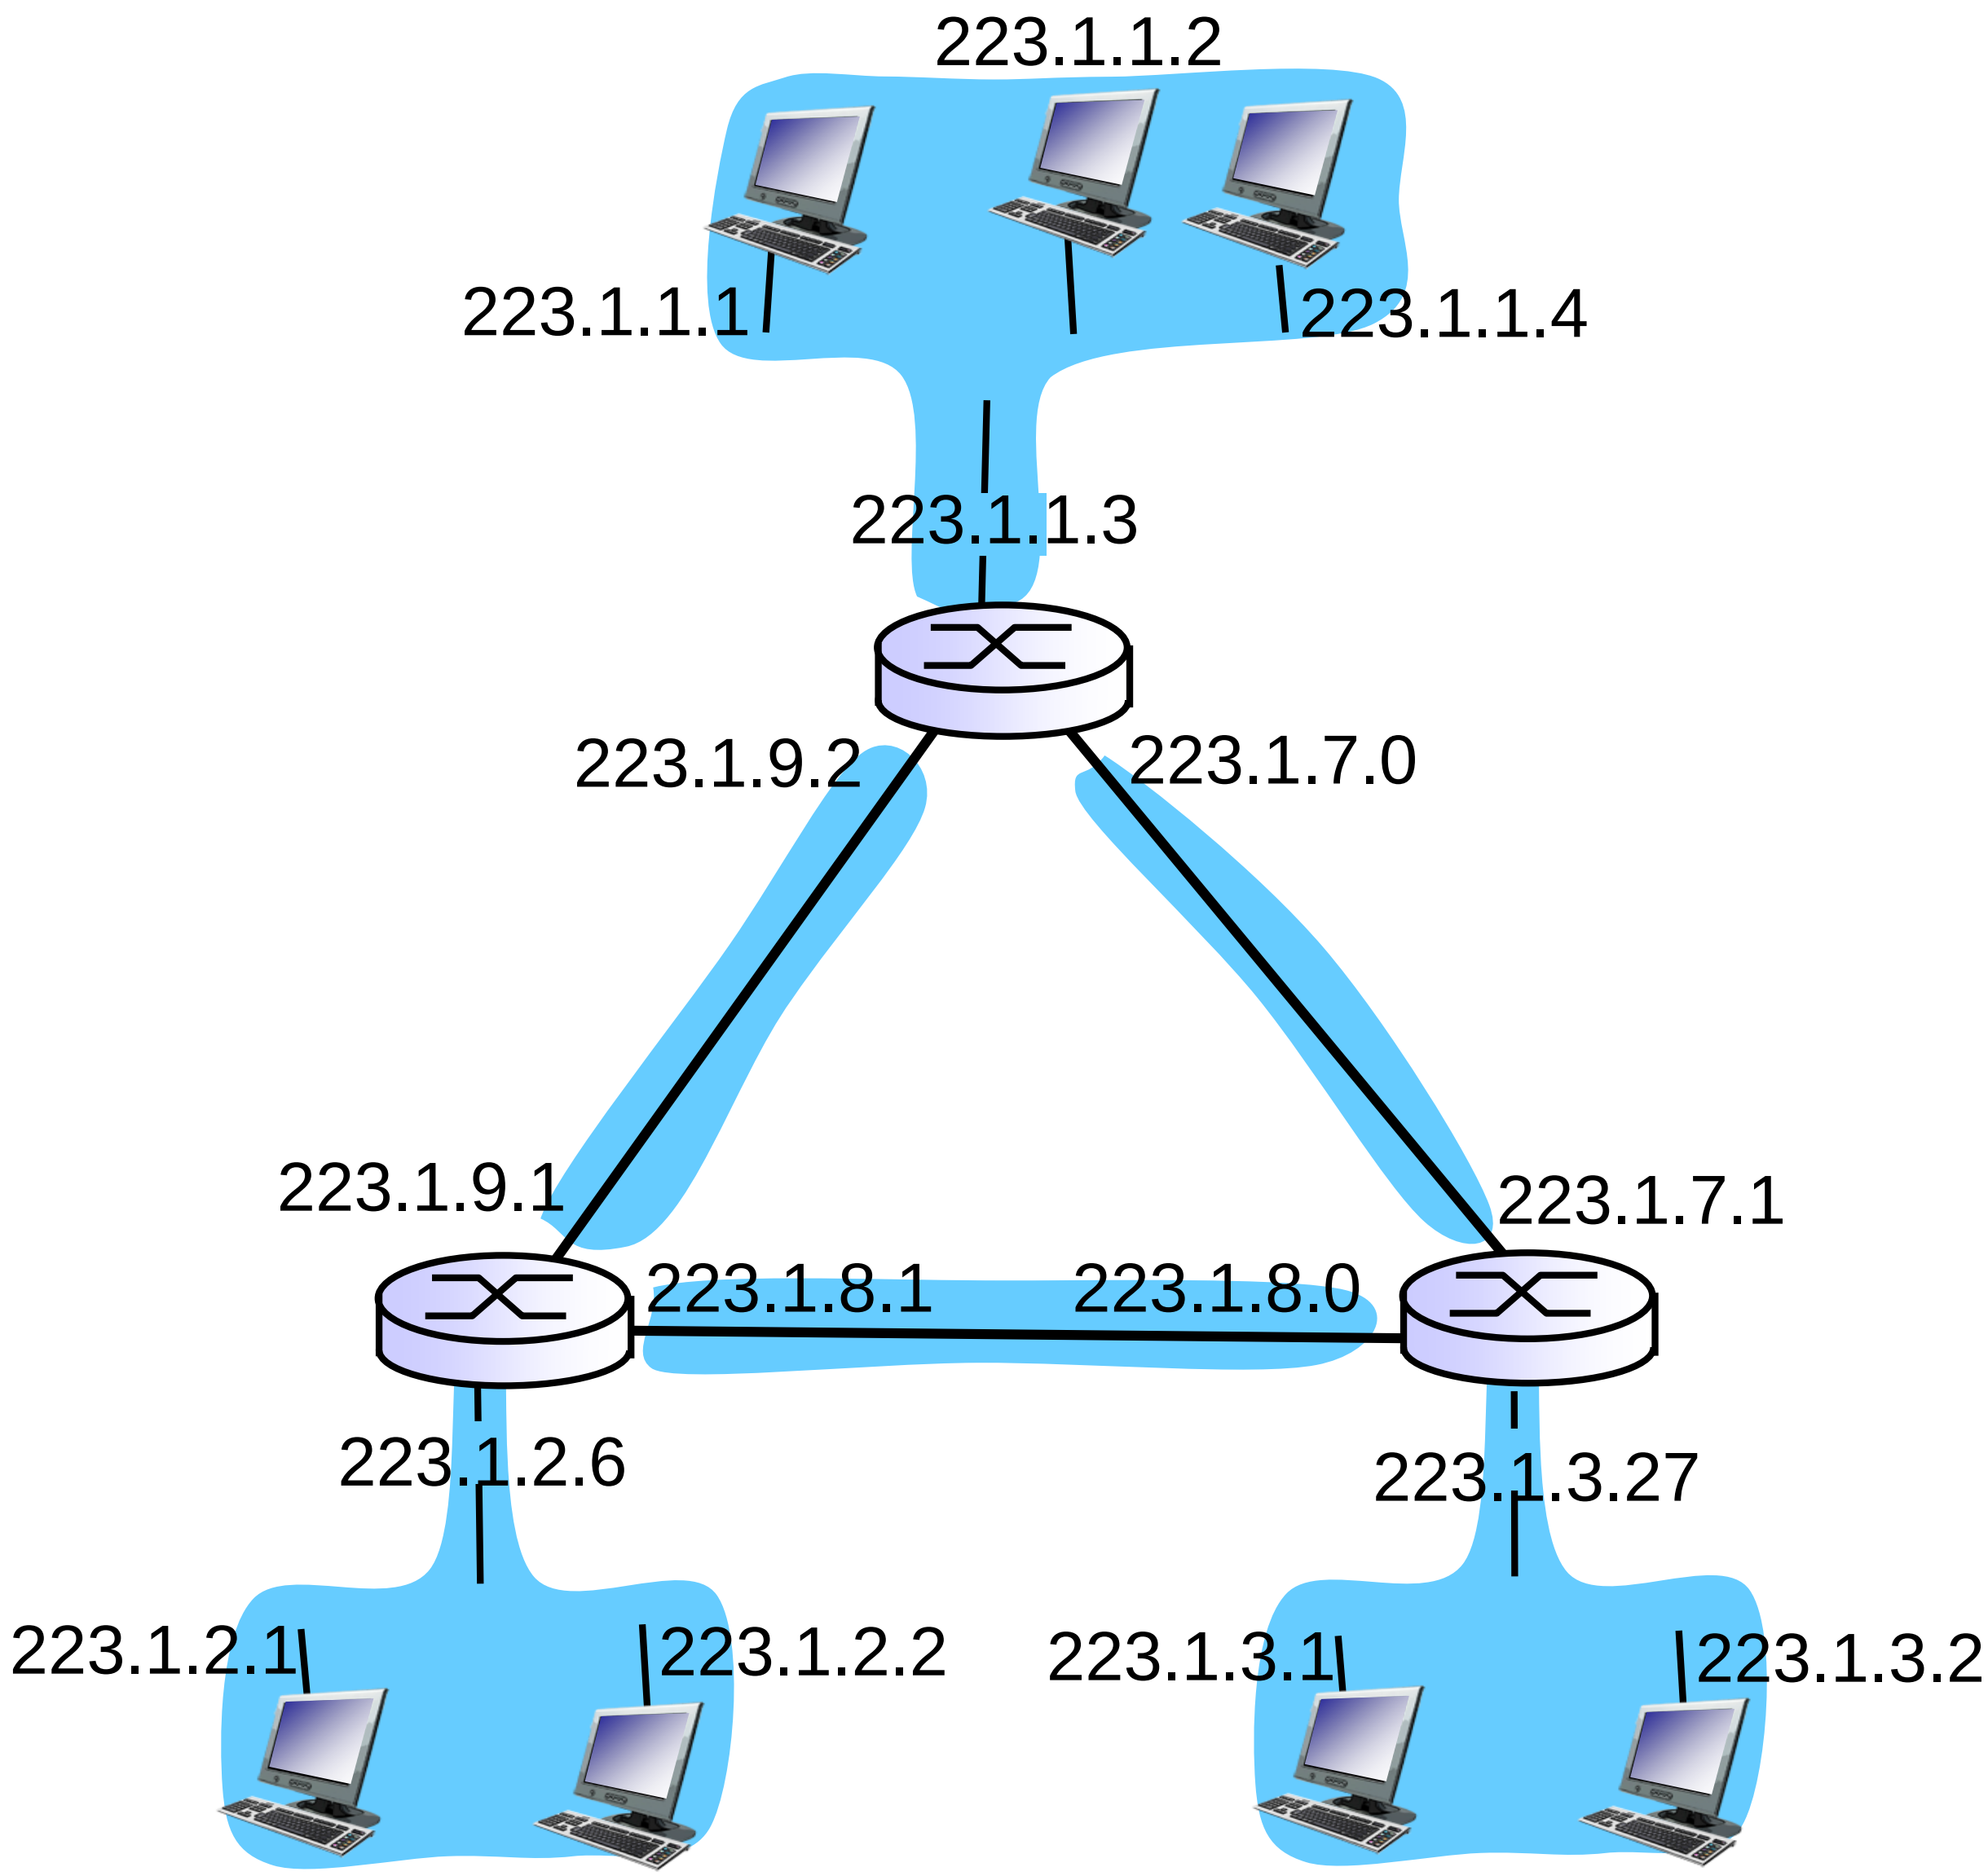

IP addressing: CIDR

CIDR: Classless InterDomain Routing

- subnet portion of address of arbitrary length
- address format: a.b.c.d/x, where x is # bits in subnet portion of address

subnet part	host part

11001000 00010111 00010000 00000000

200.23.16.0/23

IP addresses: how to get one?

Q: How does a *host* get IP address?

- hard-coded by system admin in a file
  - Windows: control-panel->network->configuration->tcp/ip->properties
  - UNIX: /etc/rc.config
- DHCP: Dynamic Host Configuration Protocol: dynamically get address from as server
  - "plug-and-play"

DHCP: Dynamic Host Configuration Protocol

goal: allow host to *dynamically* obtain its IP address from network server when it joins network

- can renew its lease on address in use
- allows reuse of addresses (only hold address while connected/"on")
- support for mobile users who want to join network

DHCP overview:

- host broadcasts "DHCP discover" msg [optional]
- DHCP server responds with "DHCP offer" msg [optional]
- host requests IP address: "DHCP request" msg
- DHCP server sends address: "DHCP ack" msg

DHCP client-server scenario

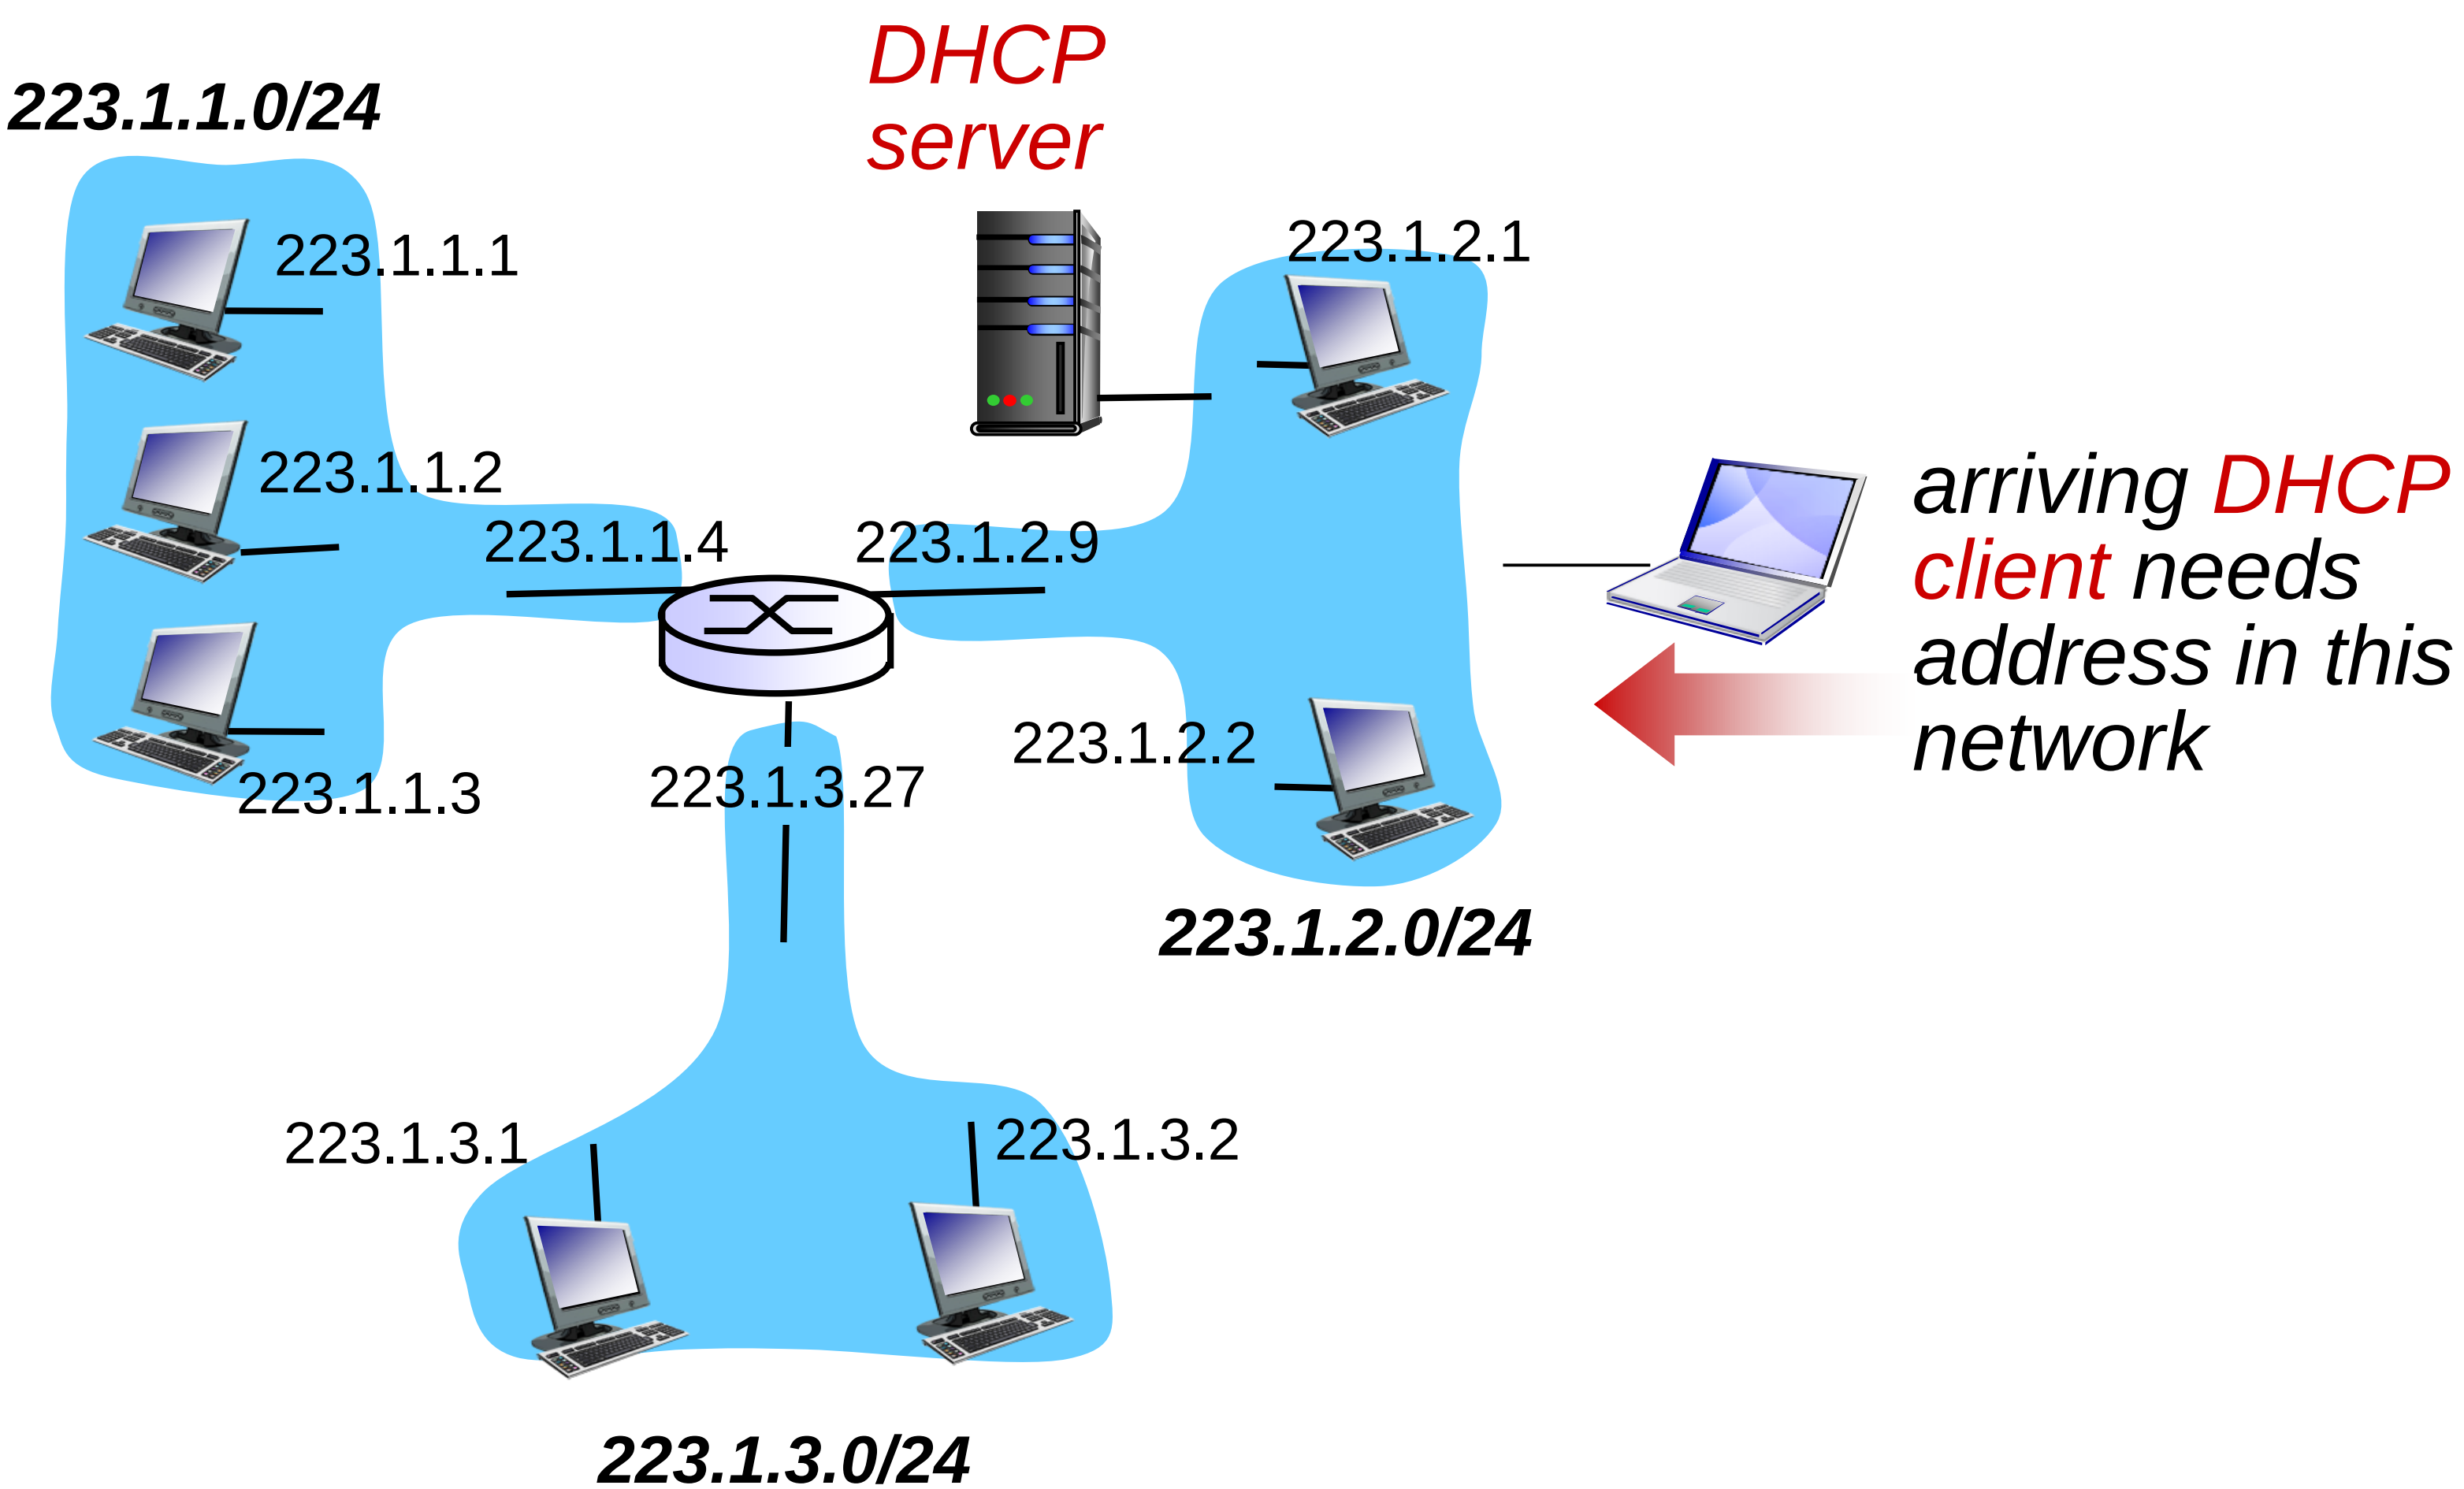

DHCP client-server scenario

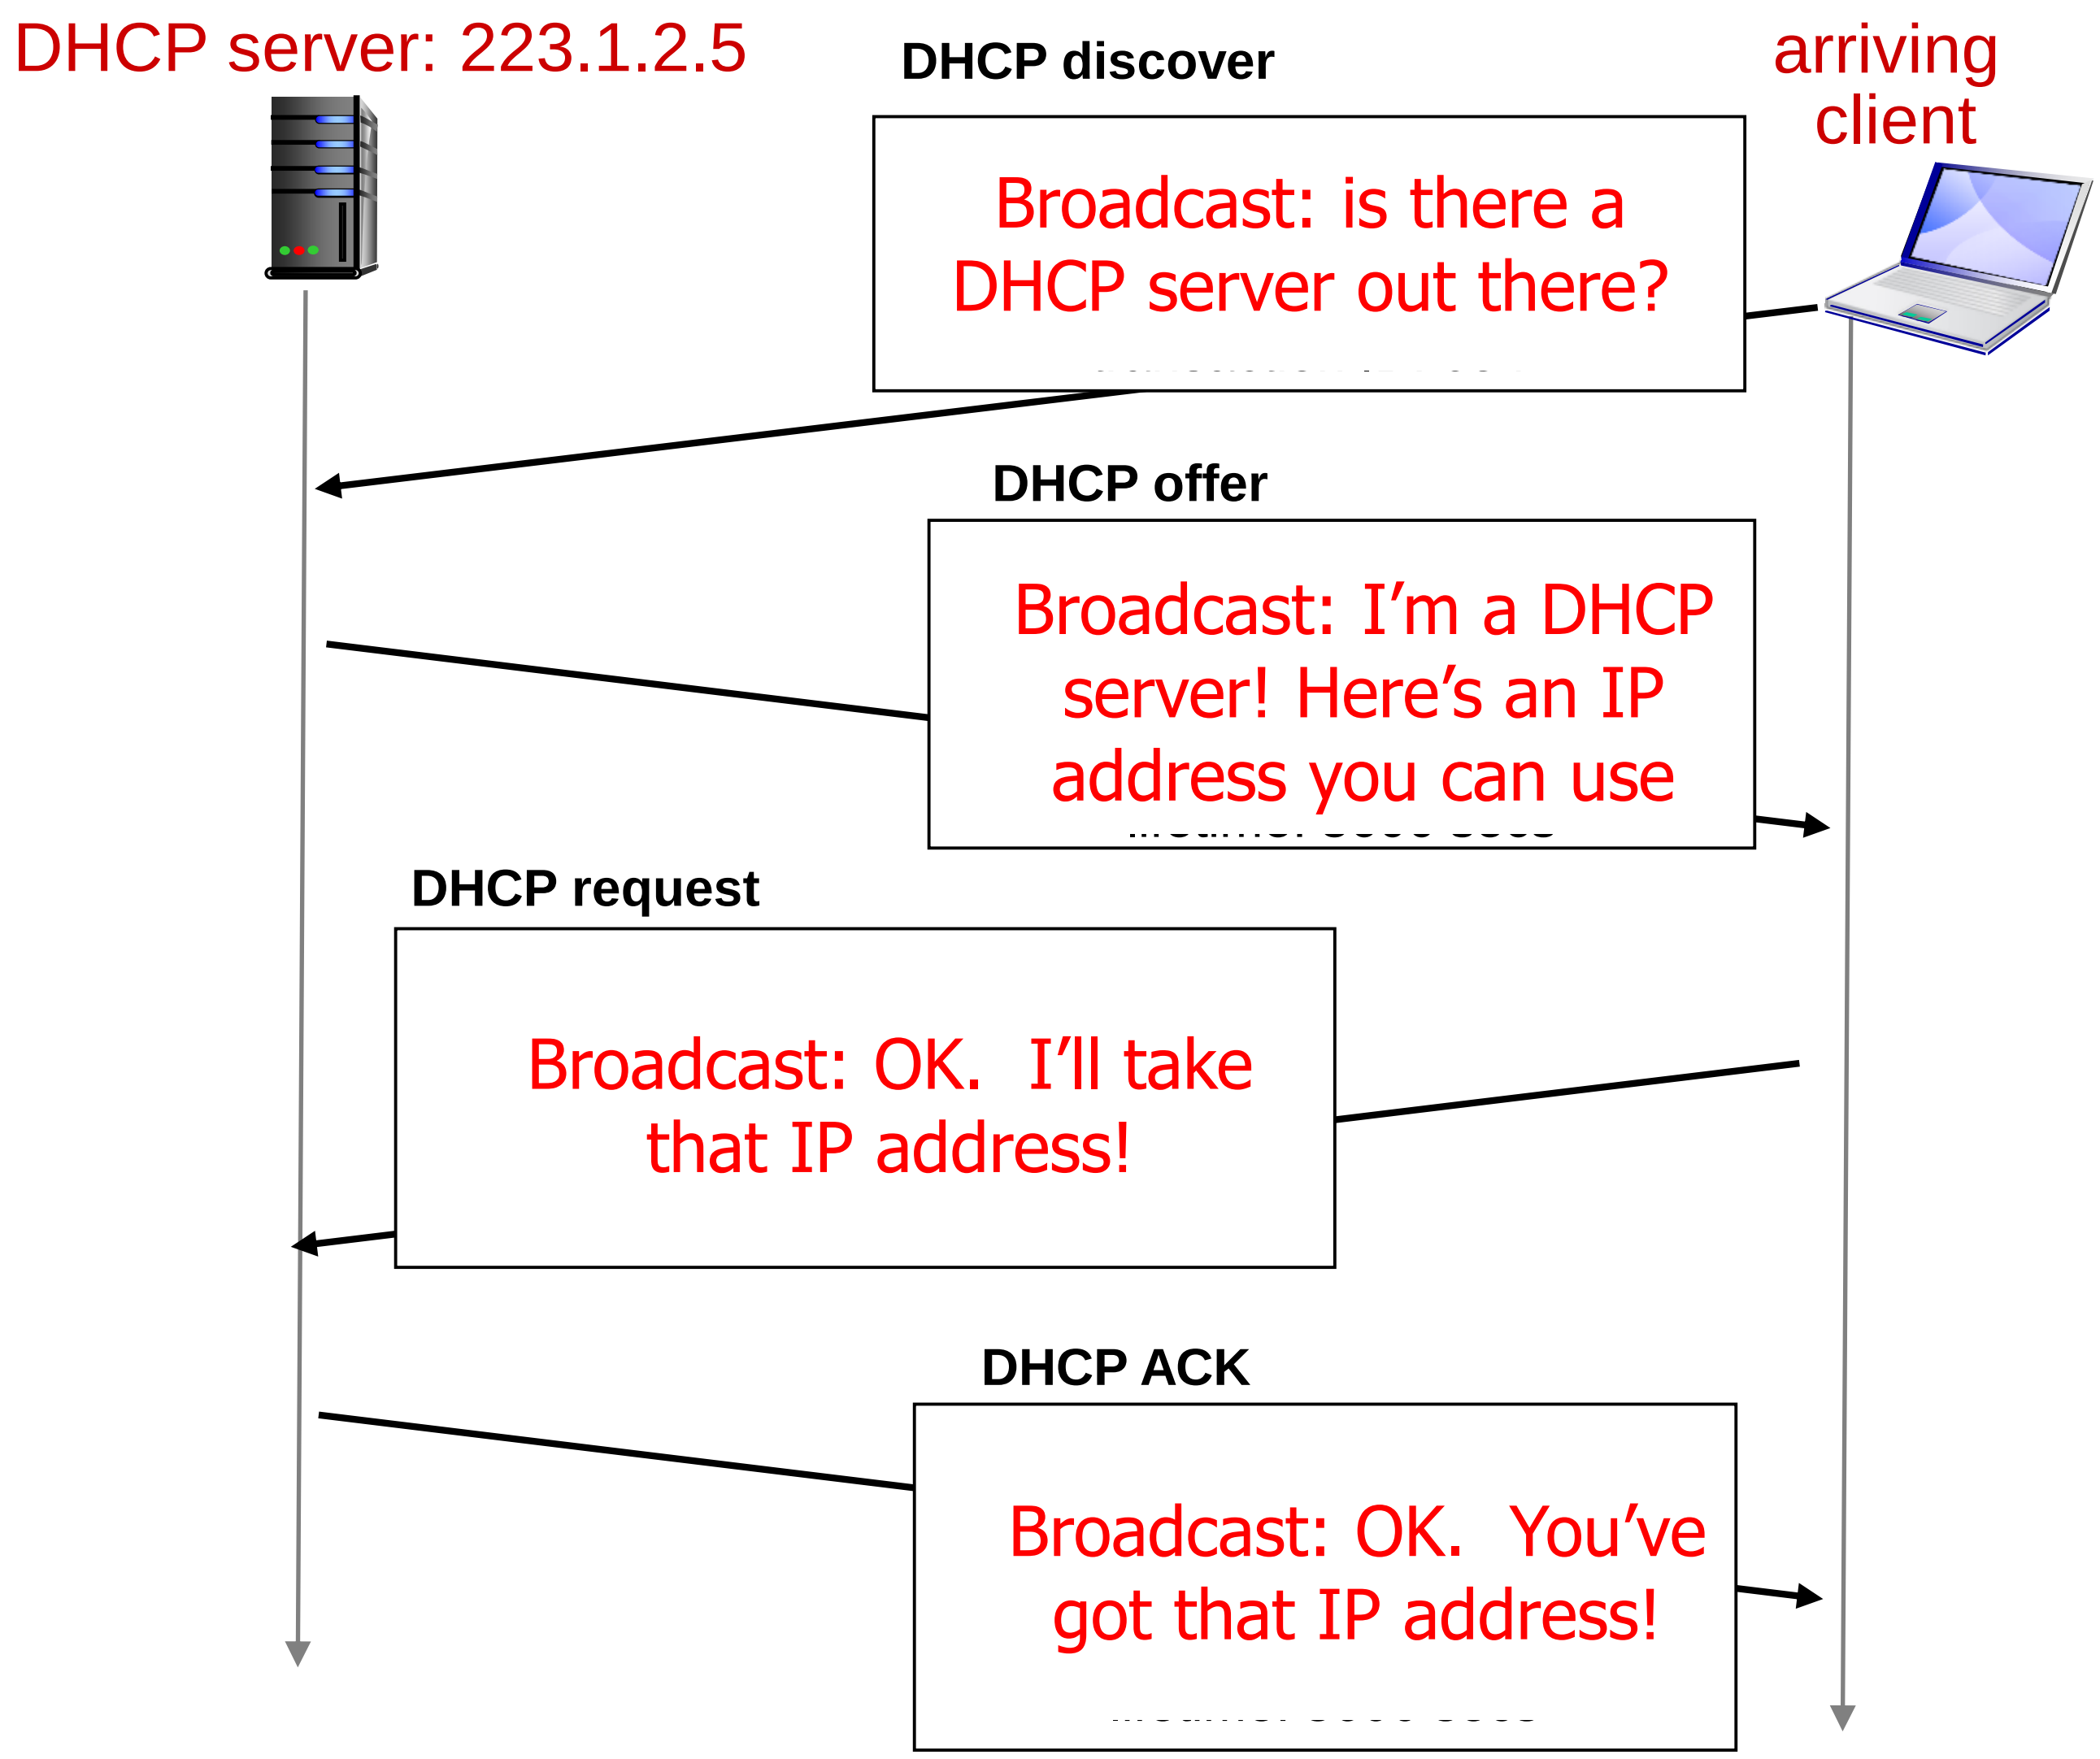

DHCP: more than IP addresses

DHCP can return more than just allocated IP address on subnet:

- address of first-hop router for client
- name and IP address of DNS sever
- network mask (indicating network versus host portion of address)

DHCP: example

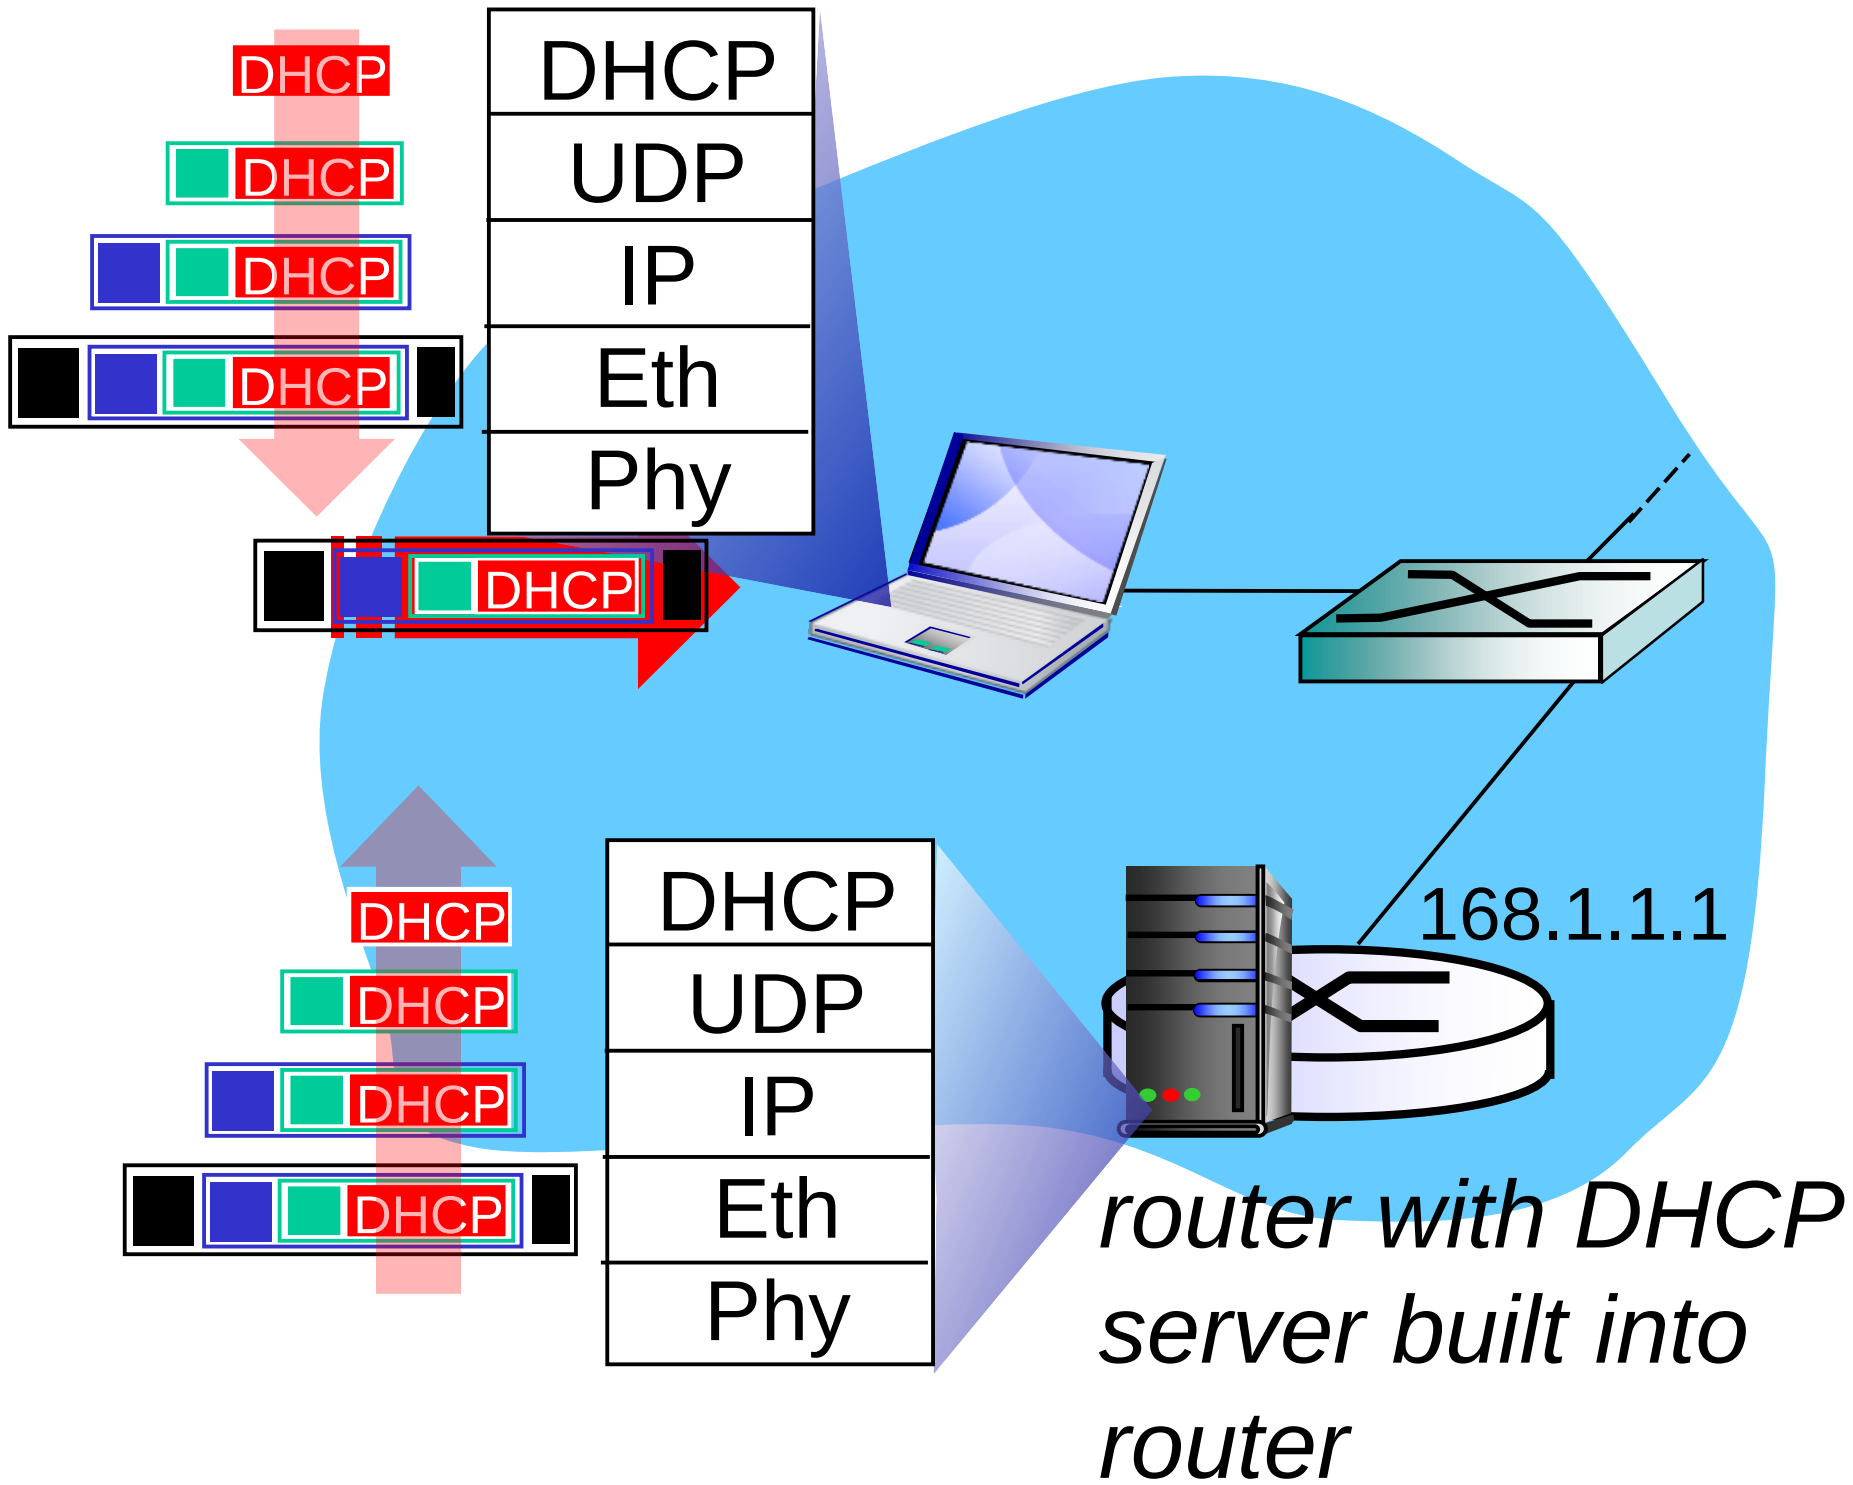

- connecting laptop needs its IP address, addr of first-hop router, addr of DNS server: use DHCP
- DHCP request encapsulated in UDP, encapsulated in IP, encapsulated in 802.1 Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet demuxed to IP demuxed, UDP demuxed to DHCP

DHCP: example

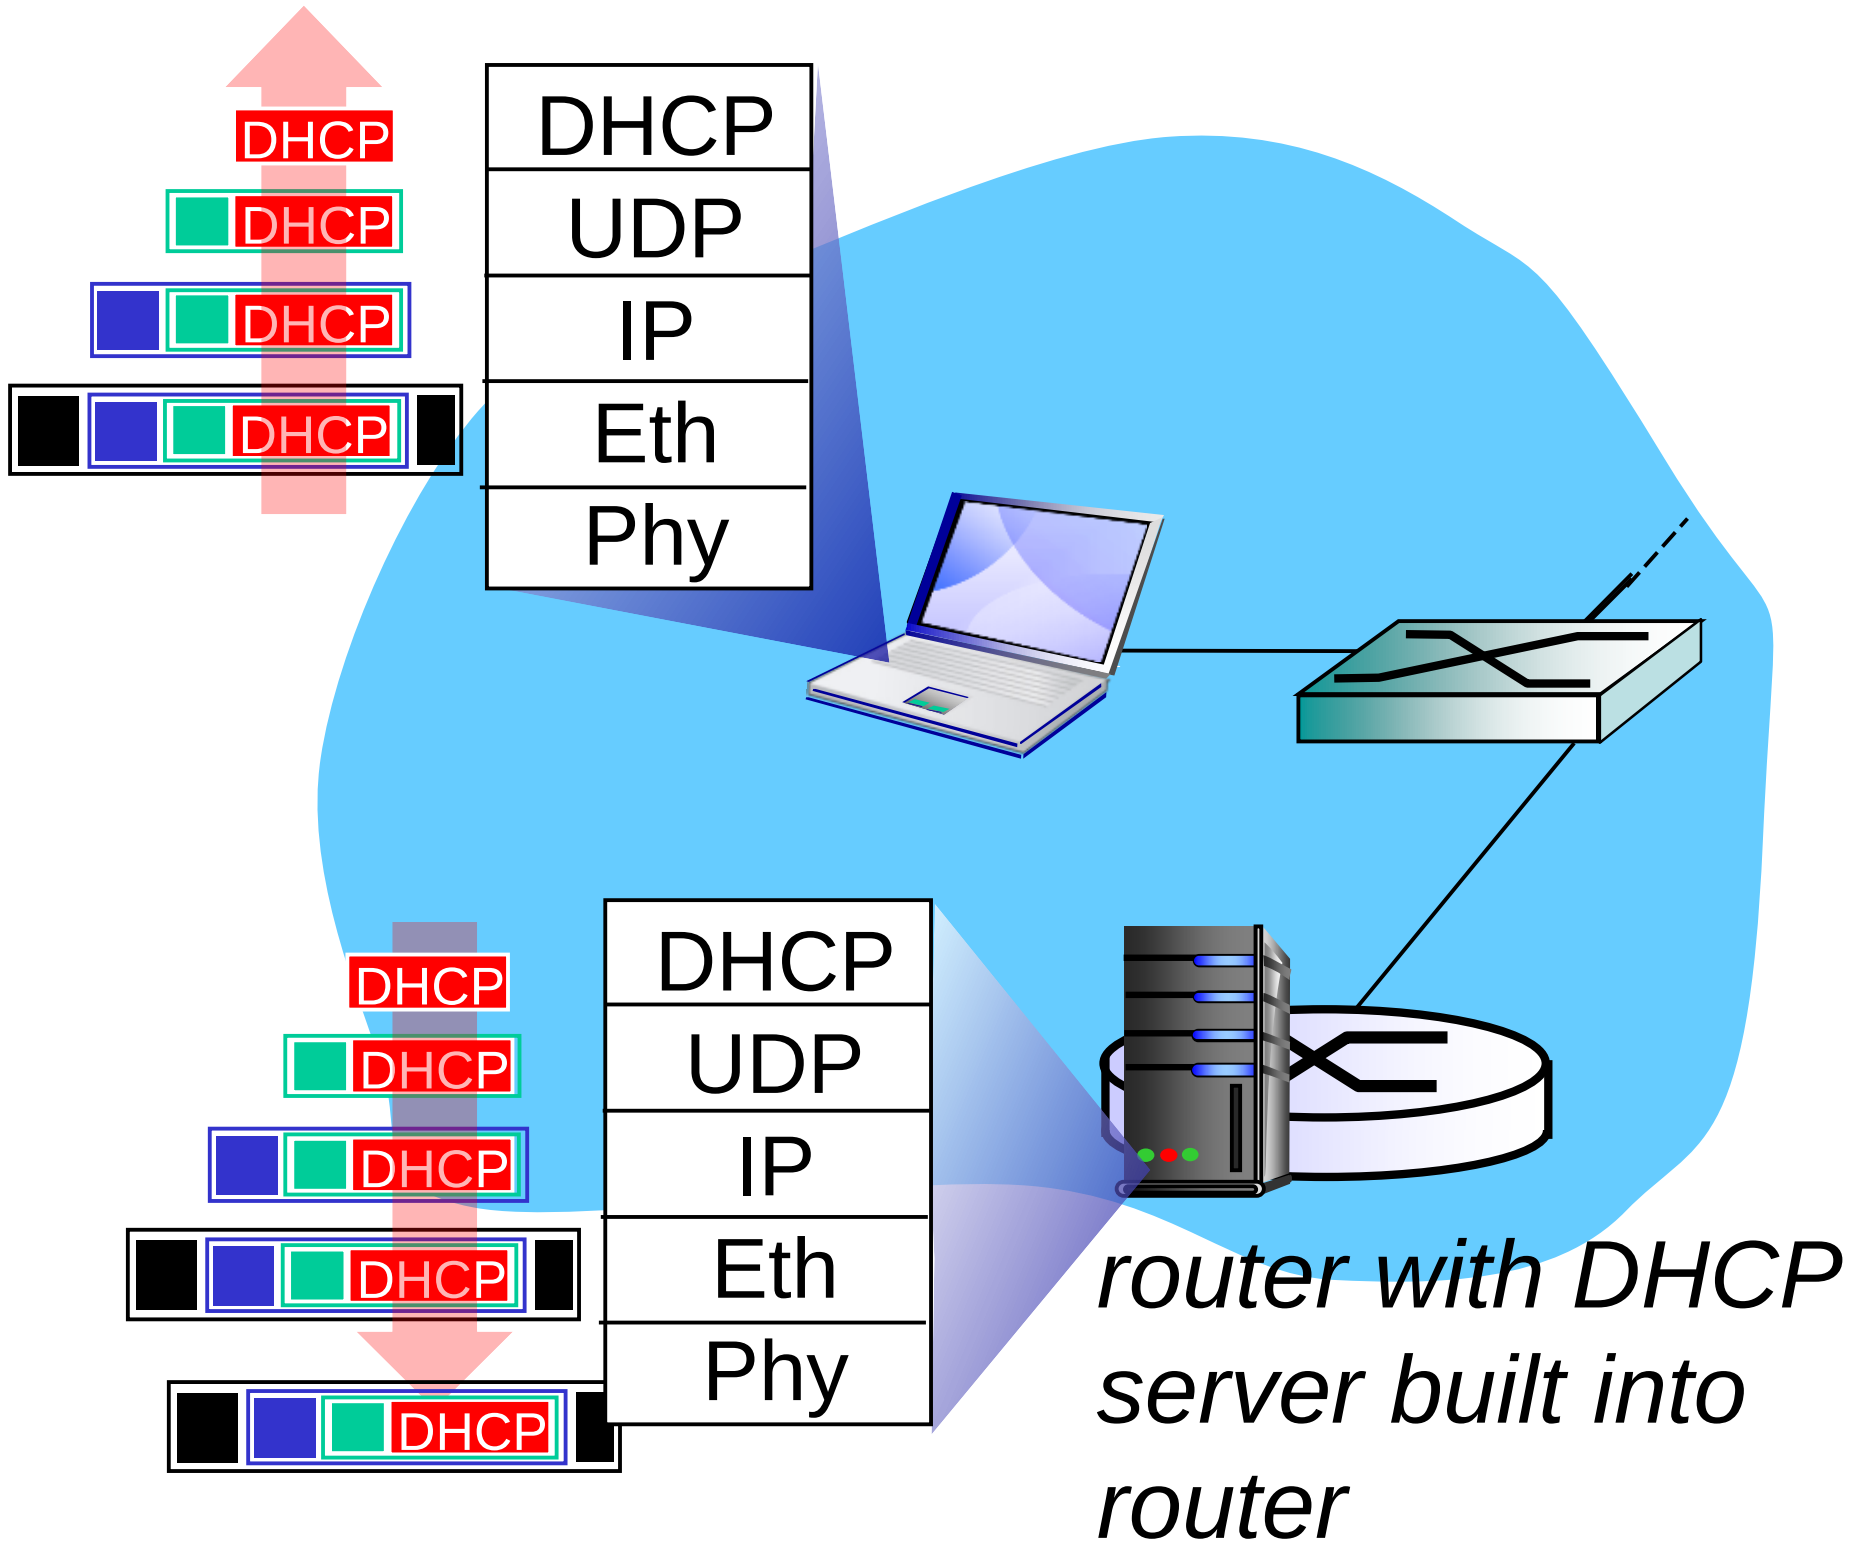

- DCP server formulates DHCP ACK containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulation of DHCP server, frame forwarded to client, demuxing up to DHCP at client
- client now knows its IP address, name and IP address of DNS server, IP address of its first-hop router

IP addresses: how to get one?

Q: how does *network* get subnet part of IP addr?

A: gets allocated portion of its provider ISP's address space

ISP's block	<u>11001000 00010111 00010000</u> 00000000	200.23.16.0/20
Organization 0	<u>11001000 00010111 0001000</u>0 00000000	200.23.16.0/23
Organization 1	<u>11001000 00010111 0001001</u>0 00000000	200.23.18.0/23
Organization 2	<u>11001000 00010111 0001010</u>0 00000000	200.23.20.0/23
...	....	....
Organization 7	<u>11001000 00010111 0001111</u>0 00000000	200.23.30.0/23

IP addressing: the last word...

Q: how does an ISP get block of addresses?

A: ICANN: Internet Corporation for Assigned Names and Numbers http://www.icann.org/

- allocates addresses
- manages DNS
- assigns domain names, resolves disputes

NAT: network address translation

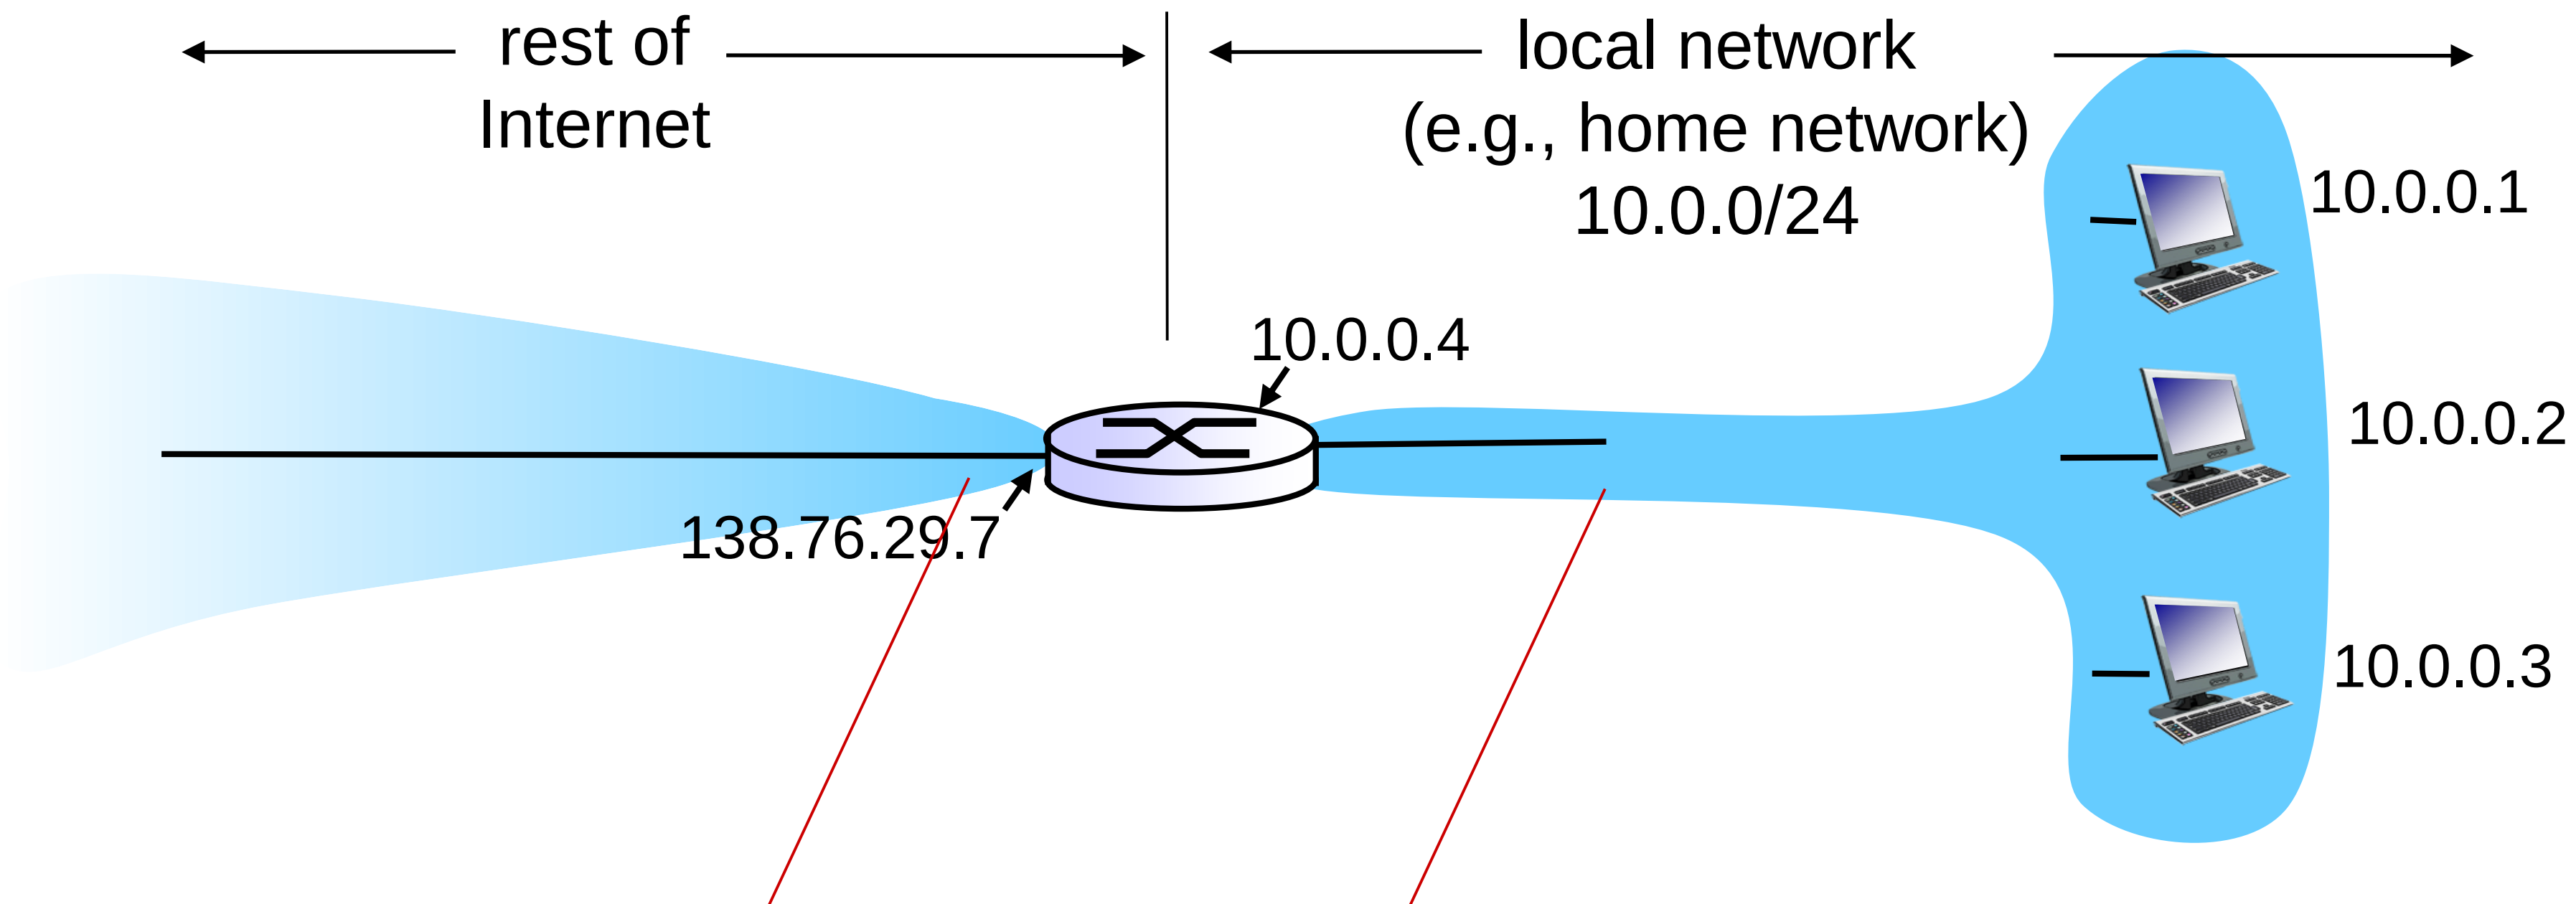

all datagrams *leaving* local network have *same* single source NAT IP address: 138.76.29.7,different source port numbers

datagrams with source or destination in this network have 10.0.0/24 address for source, destination (as usual)

NAT: network address translation

motivation: local network uses just one IP address as far as outside world is concerned:

- range of addresses not needed from ISP: just one IP address for all devices
- can change addresses of devices in local network without notifying outside world
- can change ISP without changing addresses of devices in local network
- devices inside local net not explicitly addressable, visible by outside world (a security plus)

NAT: network address translation

implementation: NAT router must:

- *outgoing datagrams: replace* (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)
  . . . remote clients/servers will respond using (NAT IP address, new port #) as destination addr
- *remember (in NAT translation table)* every (source IP address, port #) to (NAT IP address, new port #) translation pair
- *incoming datagrams: replace* (NAT IP address, new port #) in dest fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

NAT: network address translation

NAT translation table	
WAN side addr	LAN side addr
138.76.29.7, 5001	10.0.0.1, 3345
……	……

1: host 10.0.0.1 sends datagram to 128.119.40.186, 80

2: NAT router changes datagram source addr from 10.0.0.1, 3345 to 138.76.29.7, 5001, updates table

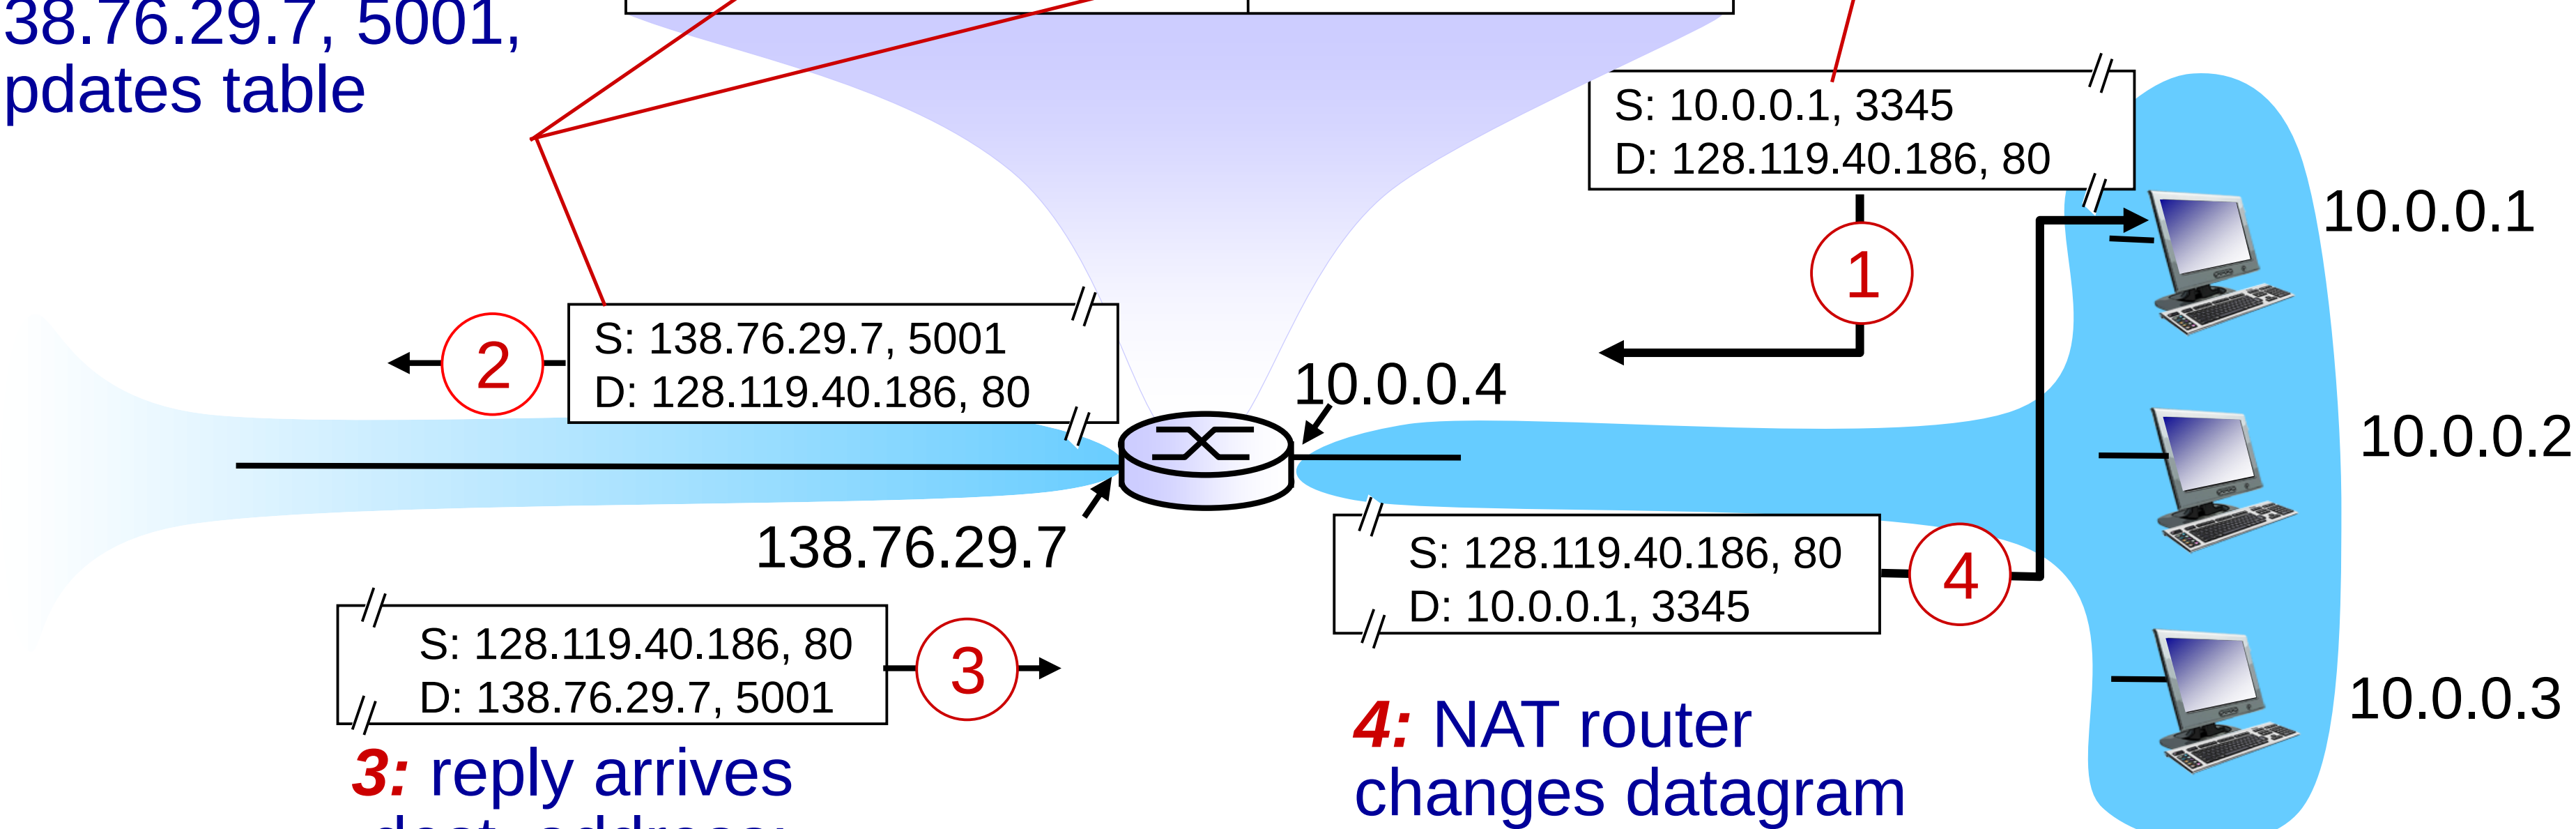

3: reply arrives dest. address: 138.76.29.7, 5001

4: NAT router changes datagram dest addr from 138.76.29.7, 5001 to 10.0.0.1, 3345

ICMP: internet control message protocol

- used by hosts & routers to communicate network-level information
  - error reporting: unreachable host, network, port, protocol
  - echo request/reply (used by ping)
- network-layer "above" IP:
  - ICMP msgs carried in IP datagrams
- ICMP message: type, code plus first 8 bytes of IP datagram causing error

Type	Code	description
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

IPv6: motivation

- *initial motivation:* 32-bit address space soon to be completely allocated.
- additional motivation:
  - header format helps speed processing/forwarding
  - header changes to facilitate QoS

IPv6 datagram format:

- fixed-length 40 byte header
- no fragmentation allowed

IPv6 datagram format

priority: identify priority among datagrams in flow
flow Label: identify datagrams in same "flow."
(concept of "flow" not well defined).
next header: identify upper layer protocol for data

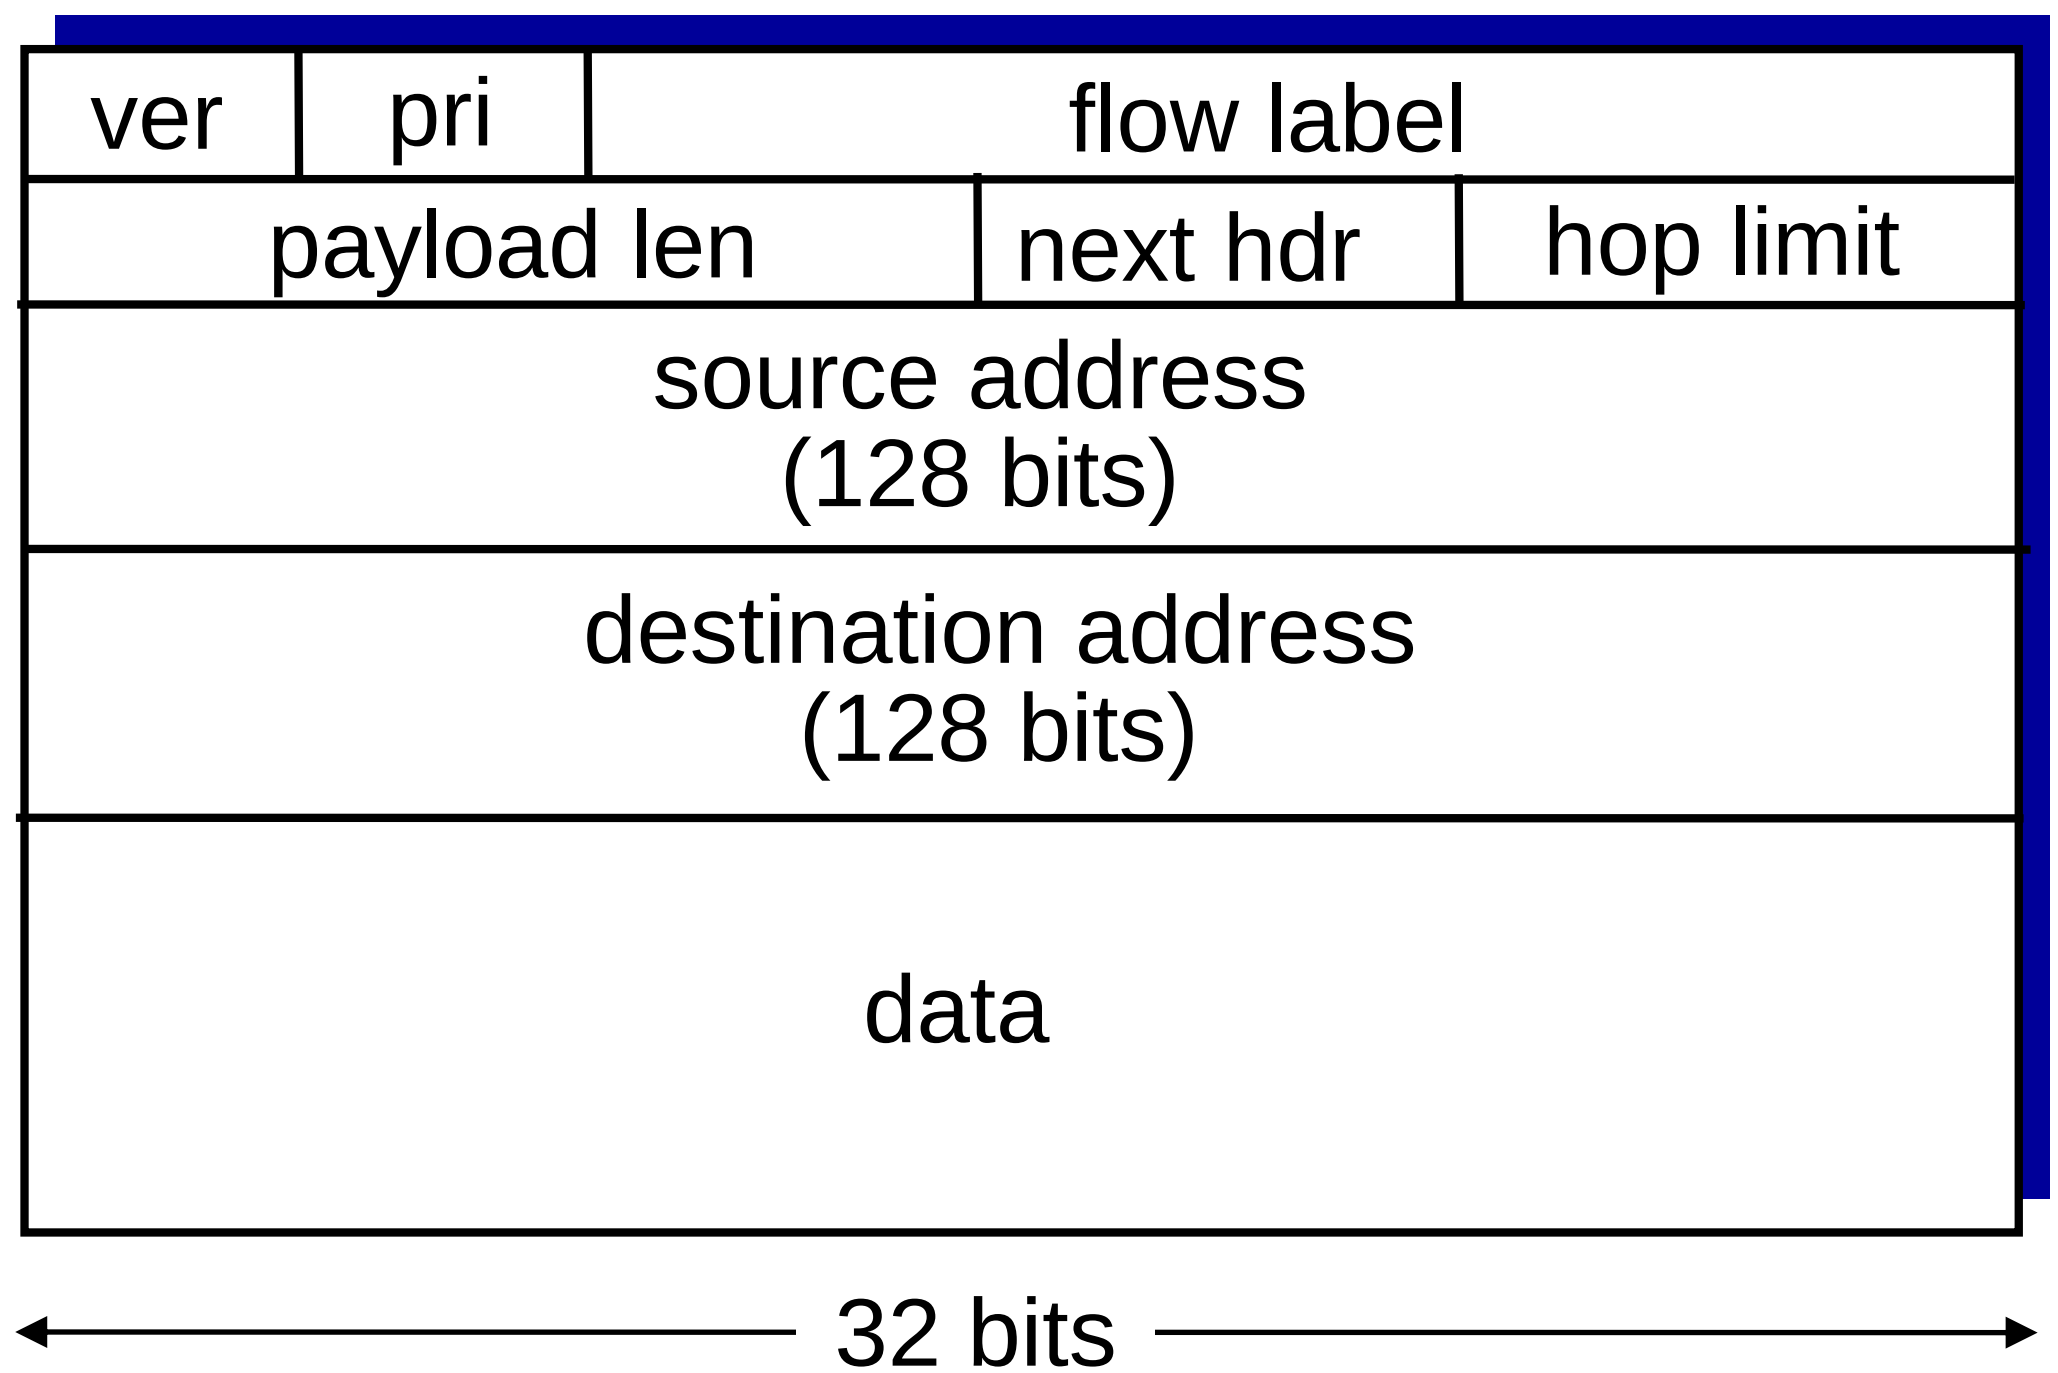

Other changes from IPv4

- *checksum:* removed entirely to reduce processing time at each hop
- *options:* allowed, but outside of header, indicated by "Next Header" field
- *ICMPv6:* new version of ICMP
  - additional message types, e.g. "Packet Too Big"
  - multicast group management functions

Transition from IPv4 to IPv6

- not all routers can be upgraded simultaneously
  - no "flag days"
  - how will network operate with mixed IPv4 and IPv6 routers?
- *tunneling:* IPv6 datagram carried as *payload* in IPv4 datagram among IPv4 routers

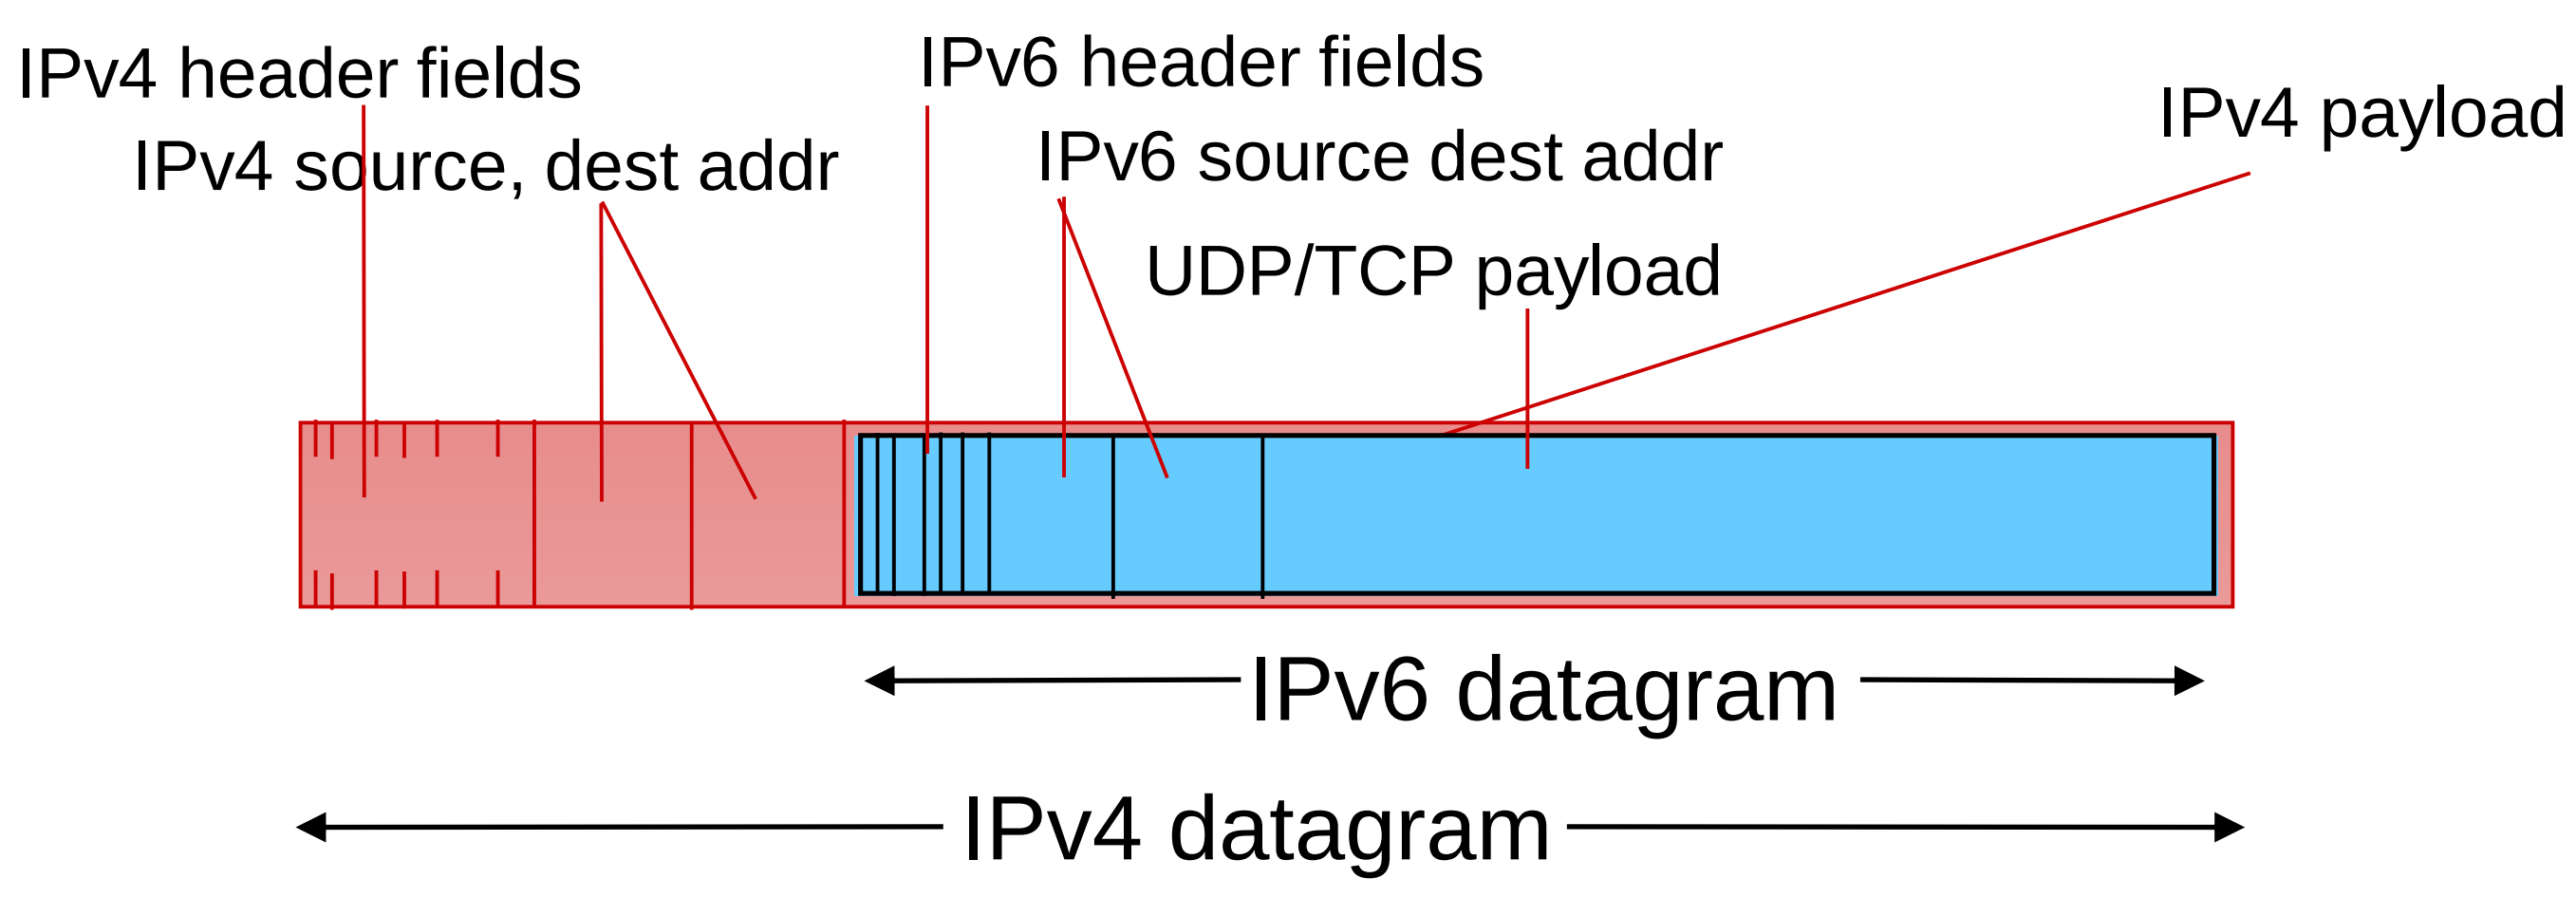

Tunneling

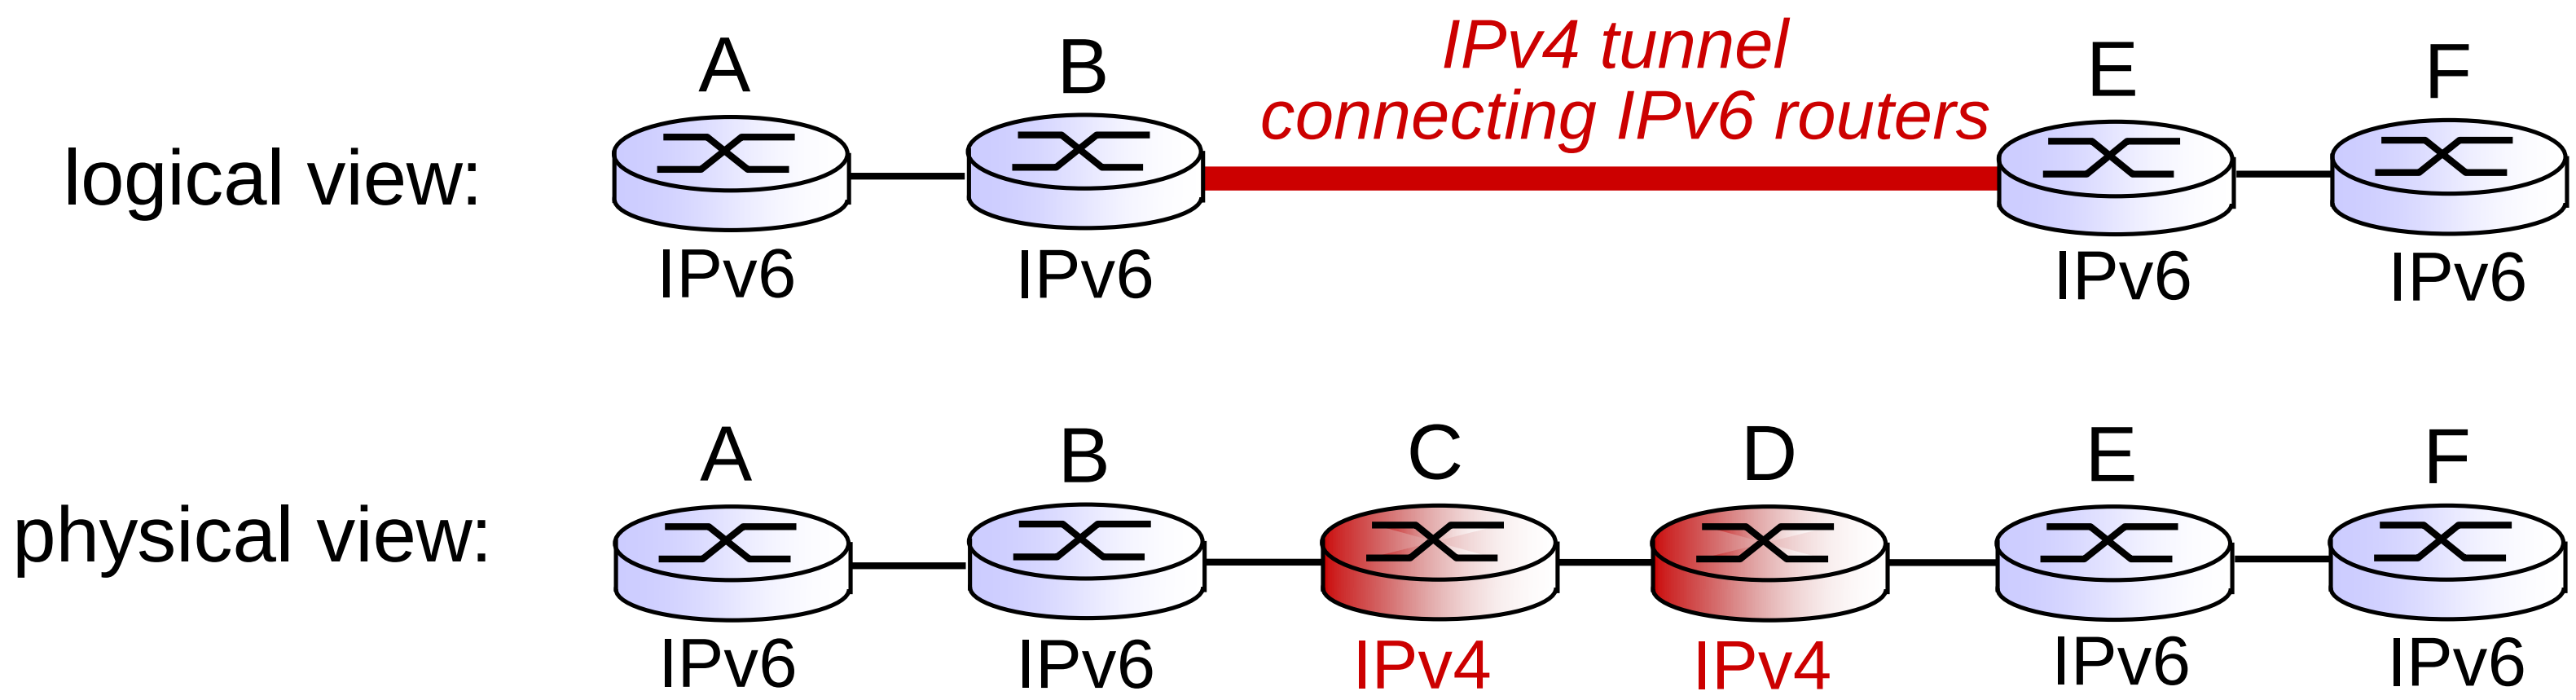

logical view:
A
B
IPv4 tunnel
connecting IPv6 routers
E
F
IPv6
IPv6
IPv6
IPv6
physical view:
A
B
C
D
E
F
IPv6
IPv6
IPv4
IPv4
IPv6
IPv6

Tunneling

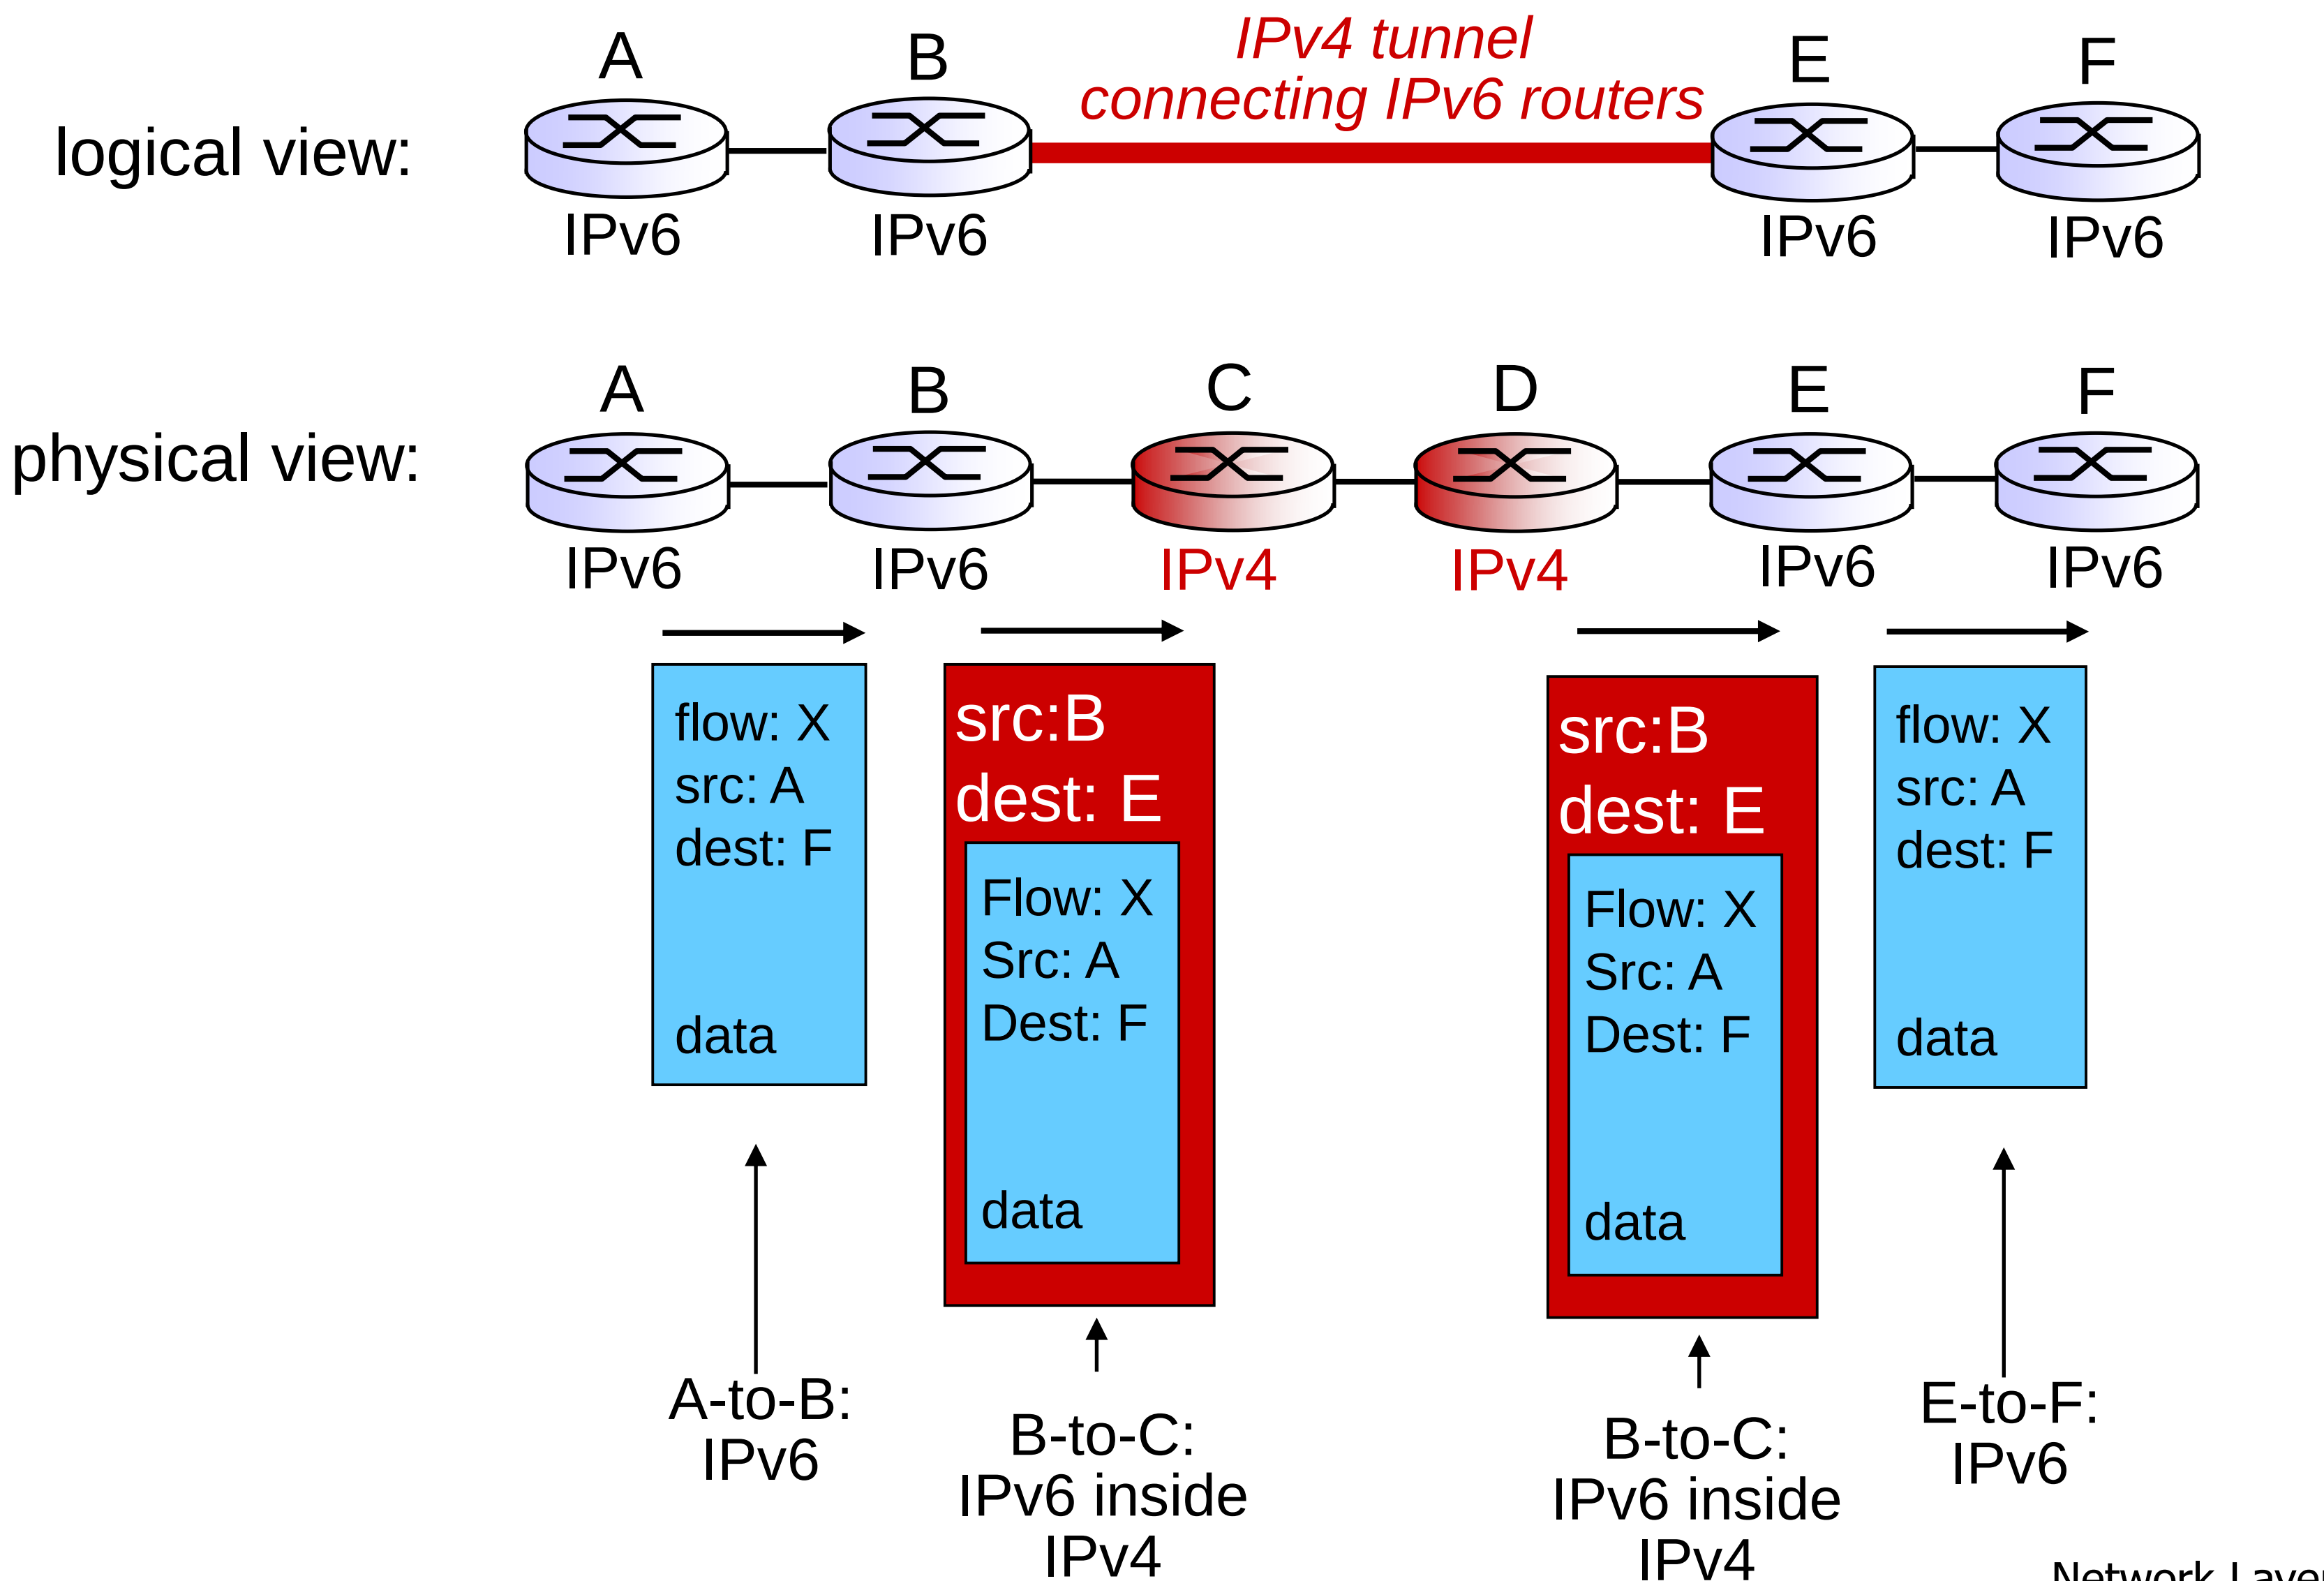
logical view:
A
B
IPv4 tunnel
connecting IPv6 routers
E
F
IPv6
IPv6
IPv6
IPv6
physical view:
A
B
C
D
E
F
IPv6
IPv6
IPv4
IPv4
IPv6
IPv6
flow: X
src: A
dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
flow: X
src: A
dest: F
data
A-to-B:
IPv6
B-to-C:
IPv6 inside
IPv4
B-to-C:
IPv6 inside
IPv4
E-to-F:
IPv6

IPv6: adoption

- US National Institutes of Standards estimate [2013]:
  - ~3% of industry IP routers
  - ~11% of US gov't routers

- *Long (long!) time for deployment, use*
  - 20 years and counting!
  - think of application-level changes in last 20 years: WWW, Facebook, …
  - *Why?*

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Interplay between routing, forwarding

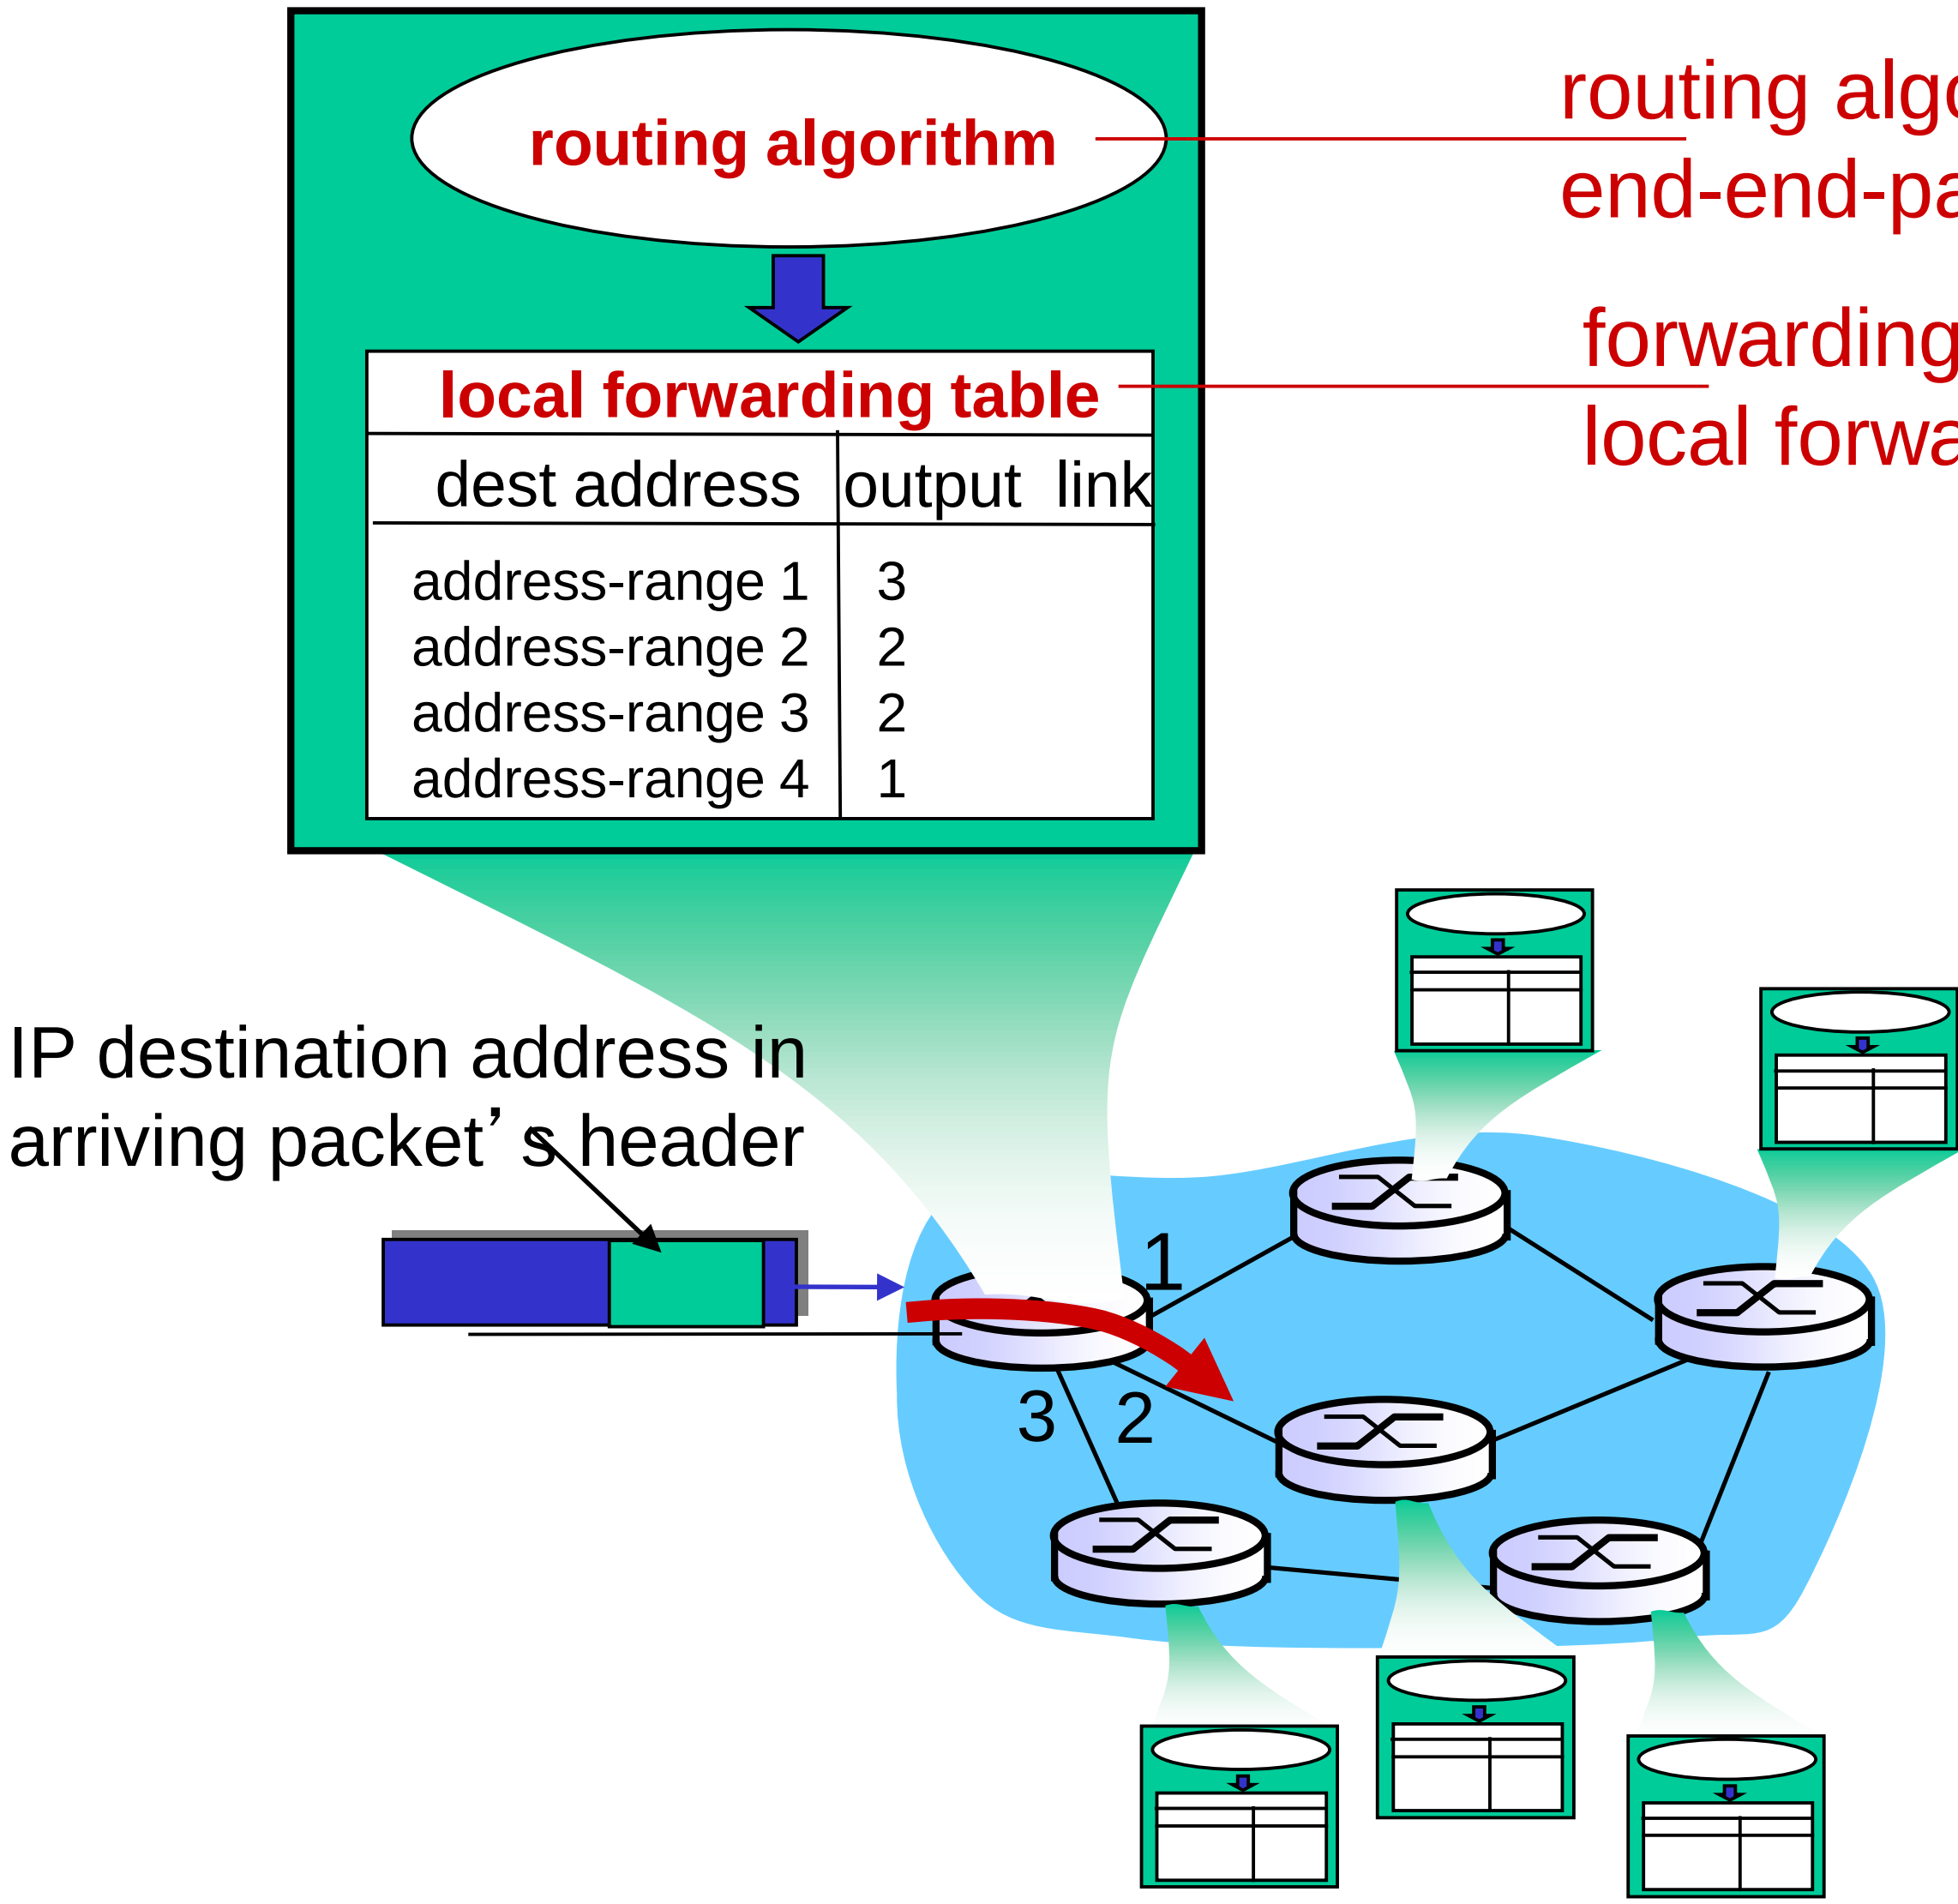

routing algorithm determines end-end-path through network

forwarding table determines local forwarding at this router

Graph abstraction

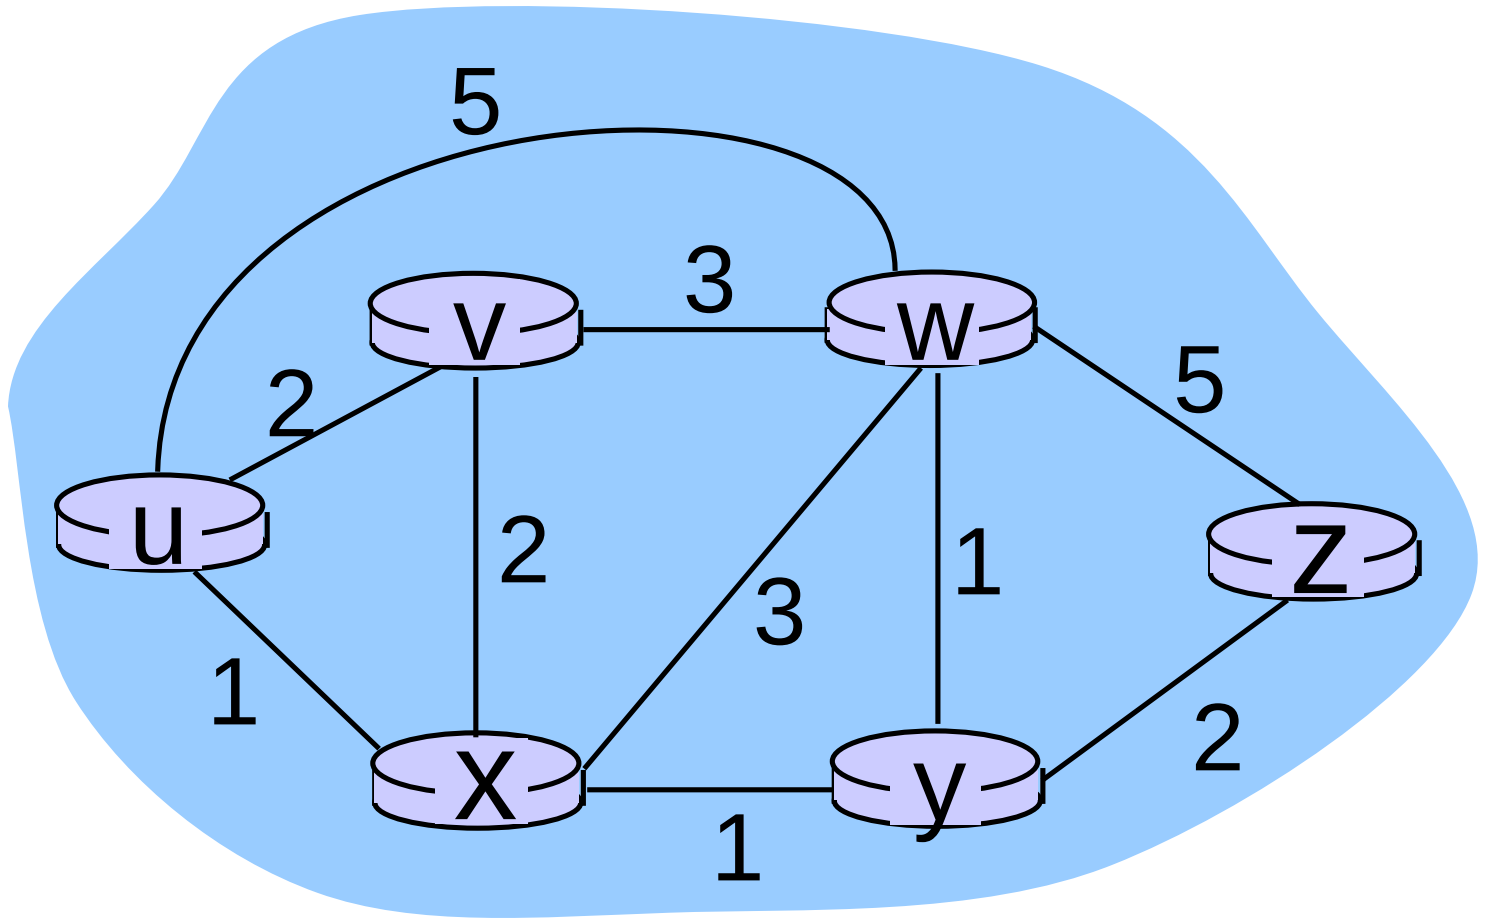

graph: G = (N,E)

N = set of routers = { u, v, w, x, y, z }

E = set of links ={ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }

aside: graph abstraction is useful in other network contexts, e.g., P2P, where *N* is set of peers and *E* is set of TCP connections

Graph abstraction: costs

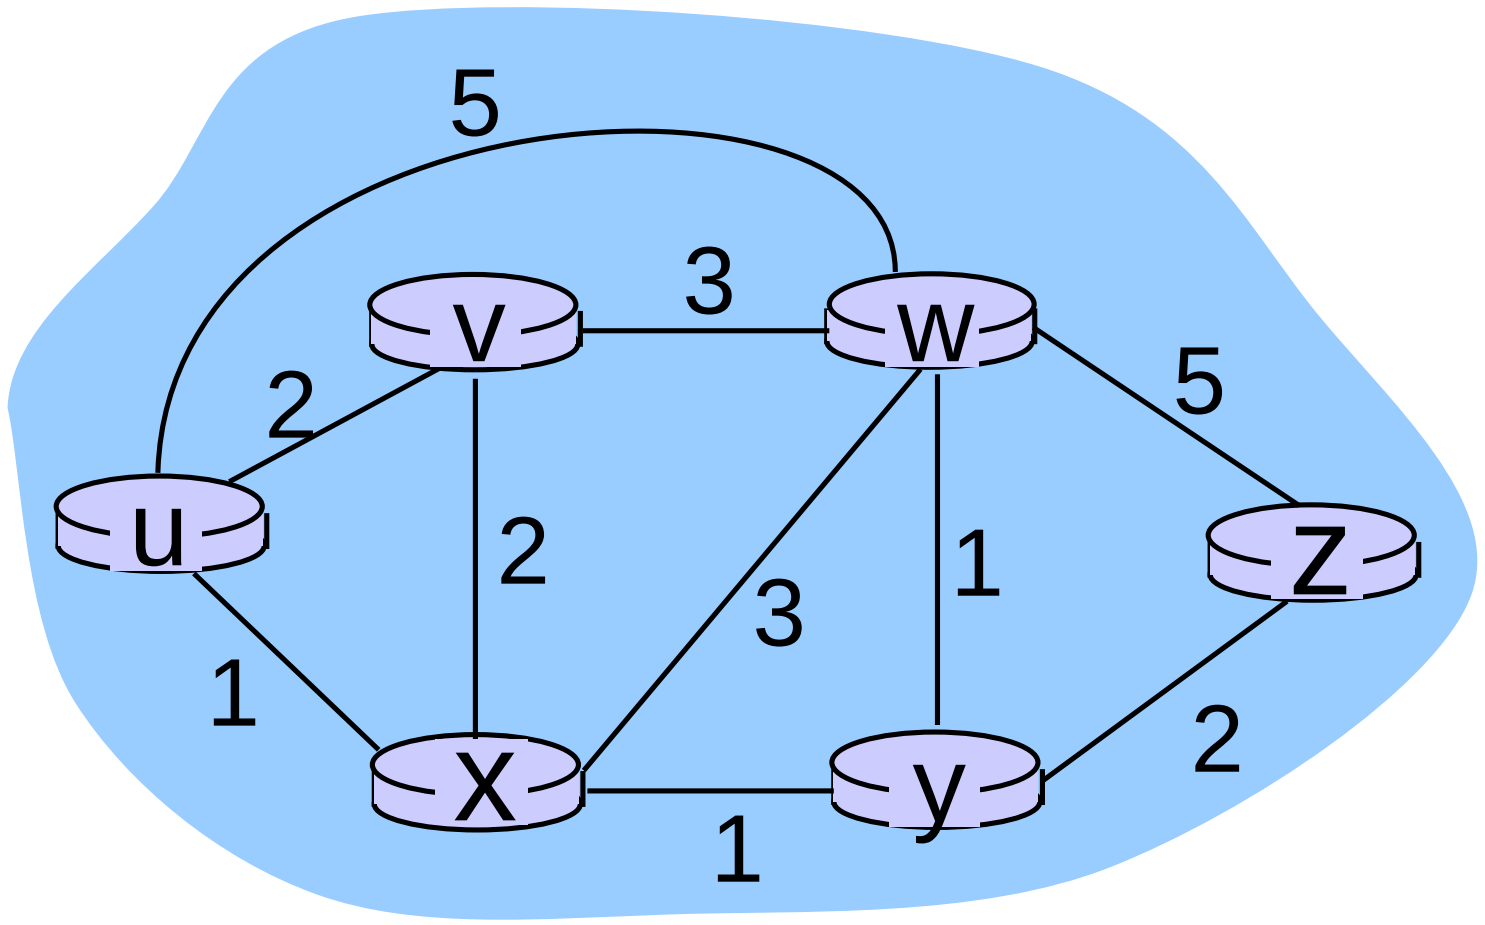

$c(x,x')$ = cost of link (x,x')
e.g., $c(w,z) = 5$

cost could always be 1, or inversely related to bandwidth, or inversely related to congestion

cost of path $(x_1, x_2, x_3,\ldots, x_p) = c(x_1,x_2) + c(x_2,x_3) + \ldots + c(x_{p-1},x_p)$

key question: what is the least-cost path between u and z ?
routing algorithm: algorithm that finds that least cost path

Routing algorithm classification

Q: global or decentralized information?

global:

- all routers have complete topology, link cost info
- "link state" algorithms

decentralized:

- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Q: static or dynamic?

static:

- routes change slowly over time

dynamic:

- routes change more quickly
  - periodic update
  - in response to link cost changes

Chapter 4: outline

A Link-State Routing Algorithm

Dijkstra's algorithm

- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives *forwarding table* for that node
- iterative: after k iterations, know least cost path to k dest.'s

notation:

- c(x,y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to dest. v
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

Dijsktra's Algorithm

```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
        then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
      D(v) = min( D(v), D(w) + c(w,v) )
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'
```

Dijkstra's algorithm: example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	∞	∞
1	uw	6,w		5,u	11,w	∞
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy					12,y
5	uwxvyz					

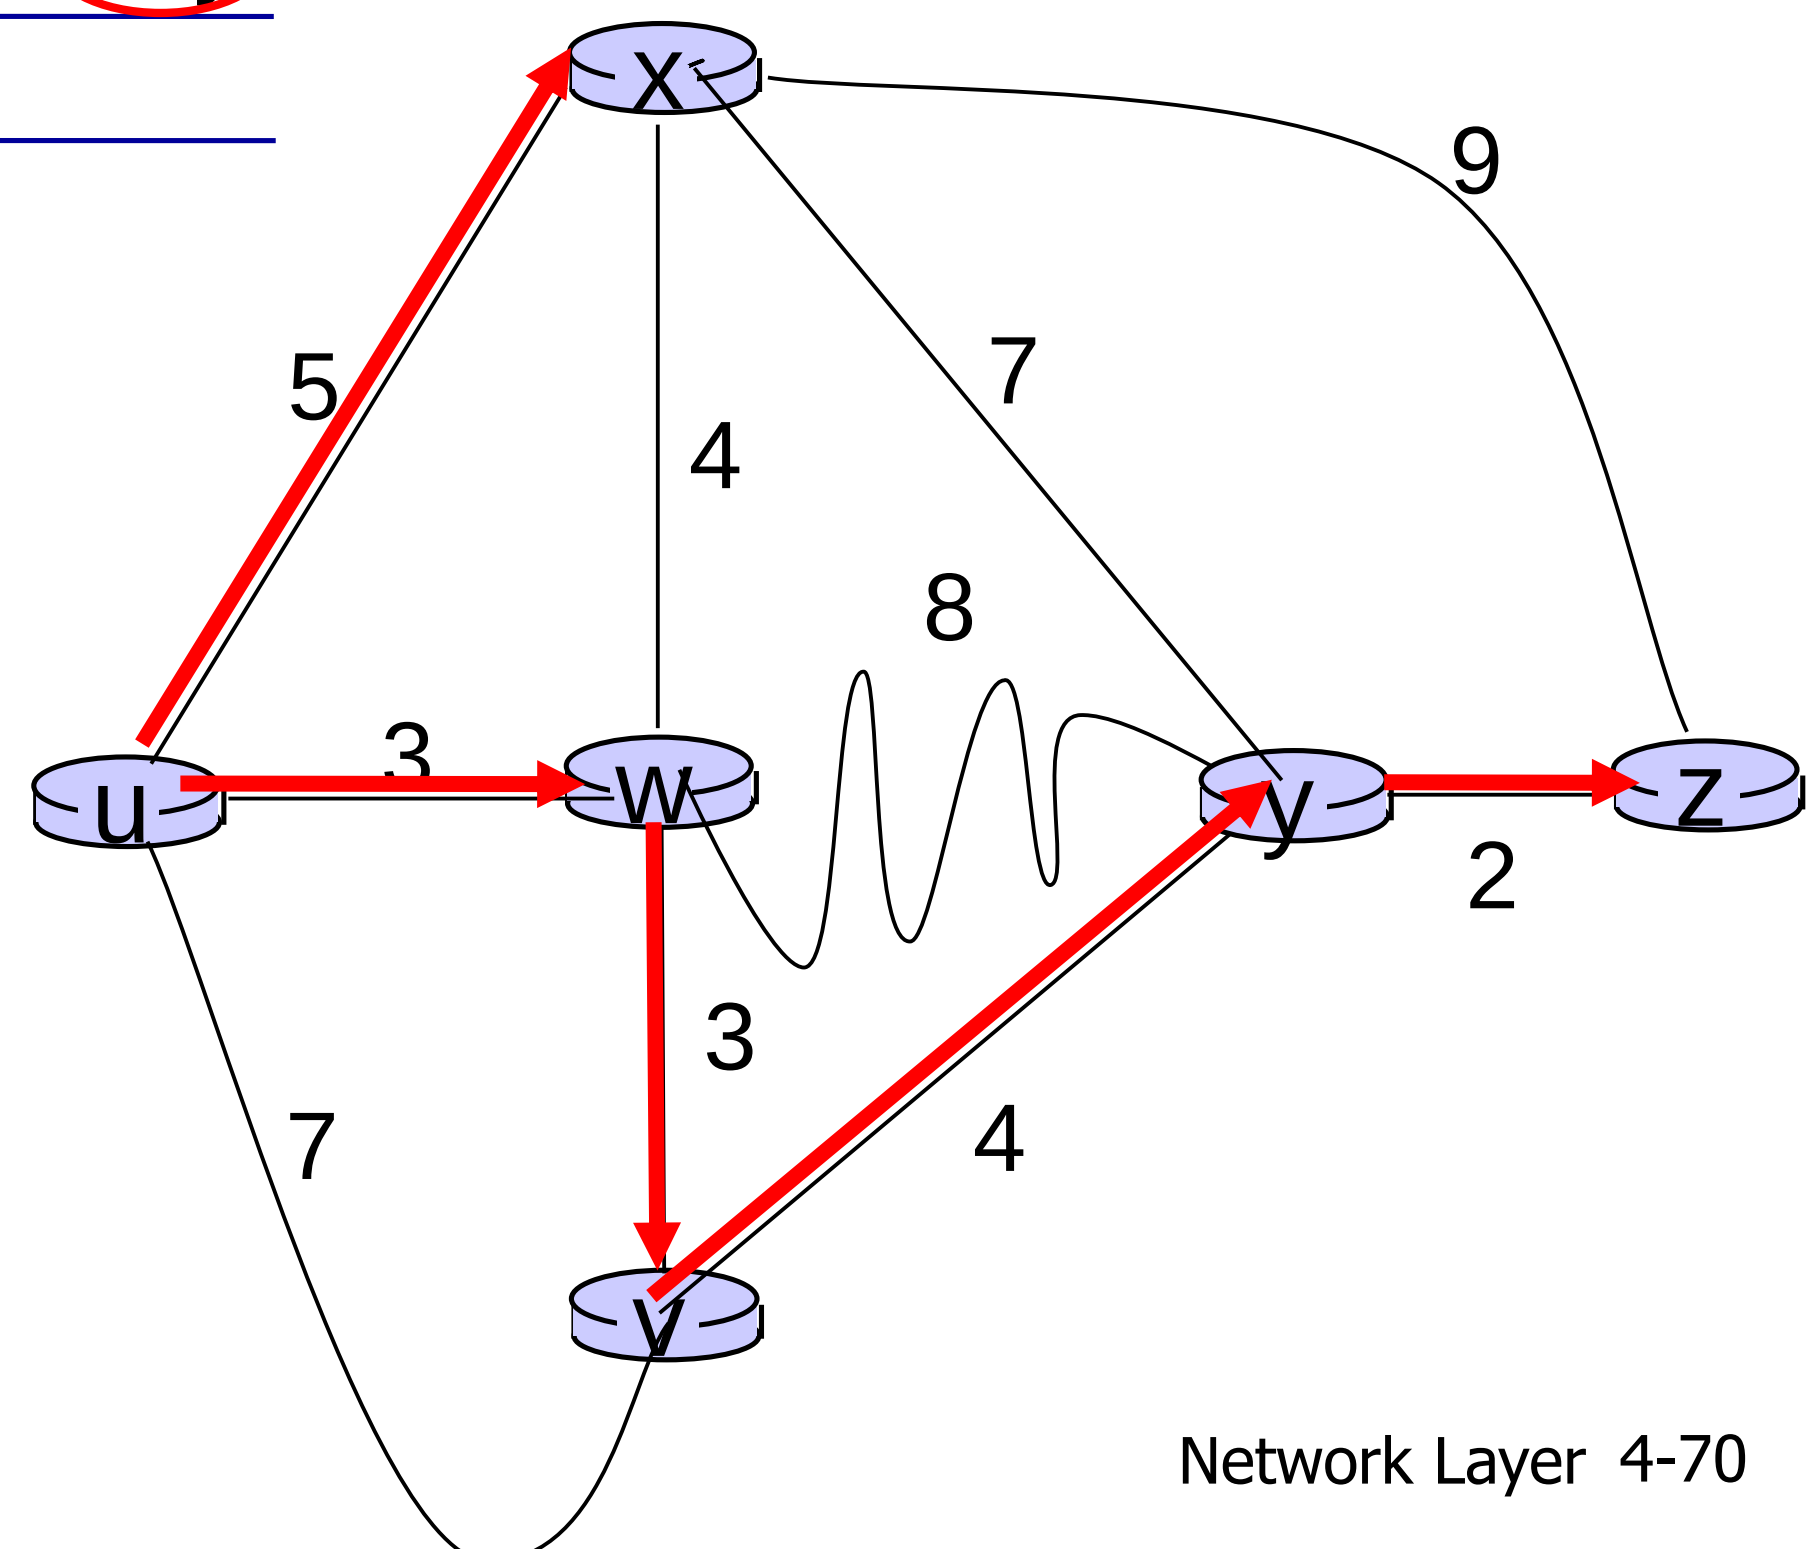

notes:

- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Distance vector algorithm

Bellman-Ford equation (dynamic programming)

let

$d_x(y)$:= cost of least-cost path from x to y

then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

cost from neighbor v to destination y

cost to neighbor v

min taken over all neighbors v of x

Bellman-Ford example

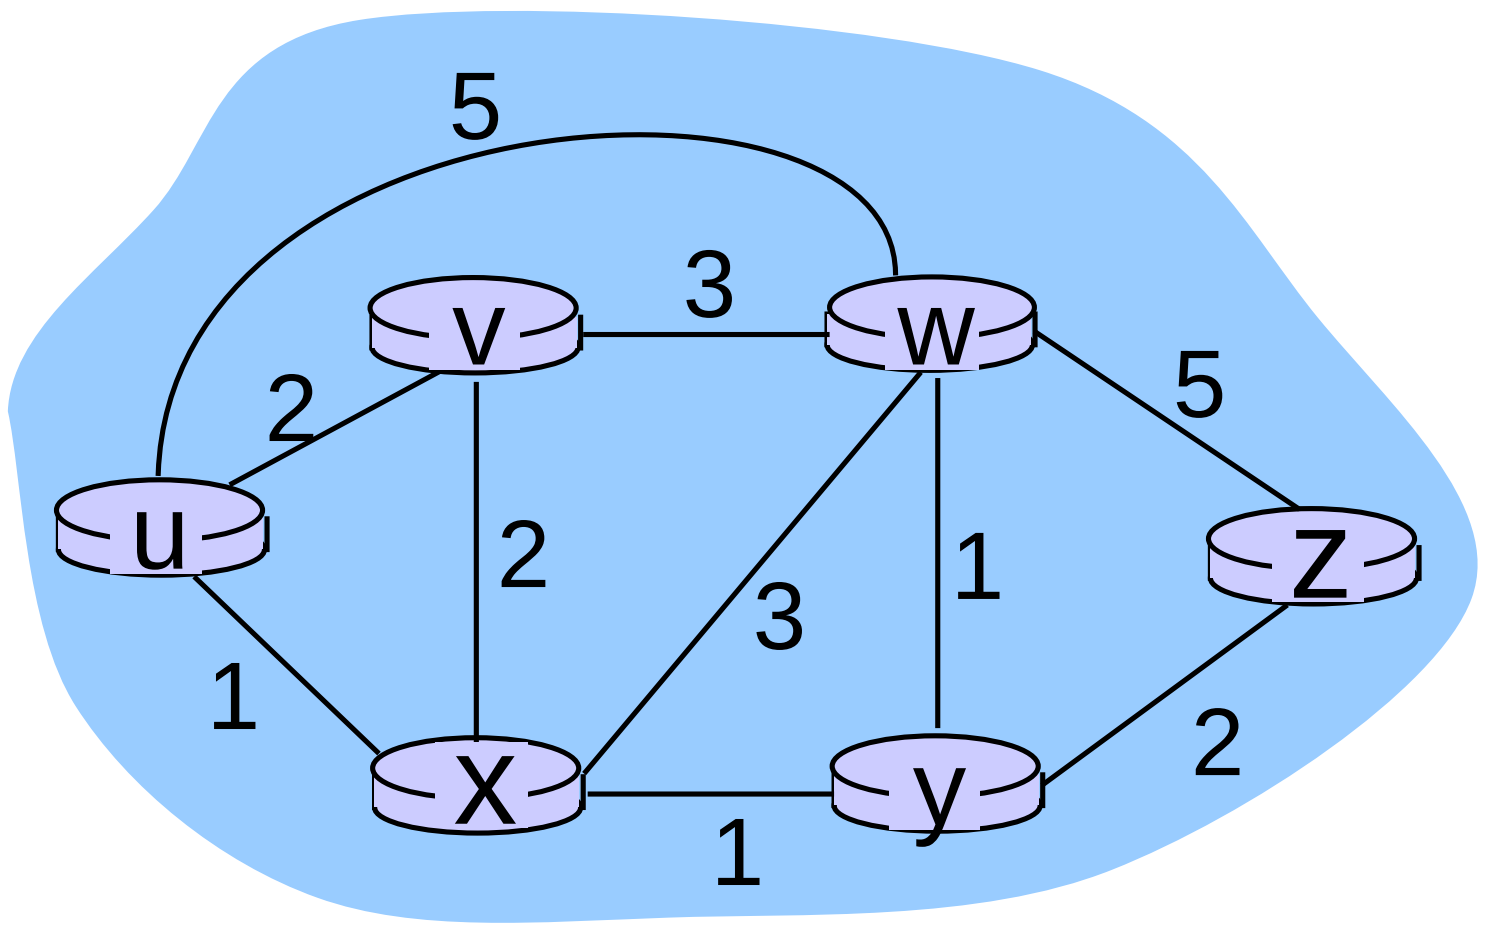

clearly, $d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

B-F equation says:

$$
\begin{aligned}
d_u(z) = \min \{ & c(u,v) + d_v(z), \\
& c(u,x) + d_x(z), \\
& c(u,w) + d_w(z) \} \\
= \min \{ & 2 + 5, \\
& 1 + 3, \\
& 5 + 3\} = 4
\end{aligned}
$$

node achieving minimum is next hop in shortest path, used in forwarding table

Distance vector algorithm

- $D_x(y)$ = estimate of least cost from x to y
  - x maintains distance vector $\mathbf{D}_x = [D_x(y): y \in N]$
- node x:
  - knows cost to each neighbor v: $c(x,v)$
  - maintains its neighbors' distance vectors. For each neighbor v, x maintains $\mathbf{D}_v = [D_v(y): y \in N]$

Distance vector algorithm

key idea:

- from time-to-time, each node sends its own distance vector estimate to neighbors
- when x receives new DV estimate from neighbor, it updates its own DV using B-F equation:

$$D_x(y) \leftarrow \min_v\{c(x,v) + D_v(y)\} \quad \text{for each node } y \in N$$

- under minor, natural conditions, the estimate $D_x(y)$ *converge to the actual least cost* $d_x(y)$

Distance vector algorithm

iterative, asynchronous: each local iteration caused by:
- local link cost change
- DV update message from neighbor

distributed:
- each node notifies neighbors *only* when its DV changes
  - neighbors then notify their neighbors if necessary

each node:

wait for (change in local link cost or msg from neighbor)

recompute estimates

if DV to any dest has changed, *notify* neighbors

$$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\}$$
$$= \min\{2+0\ ,\ 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\}$$
$$= \min\{2+1\ ,\ 7+0\} = 3$$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

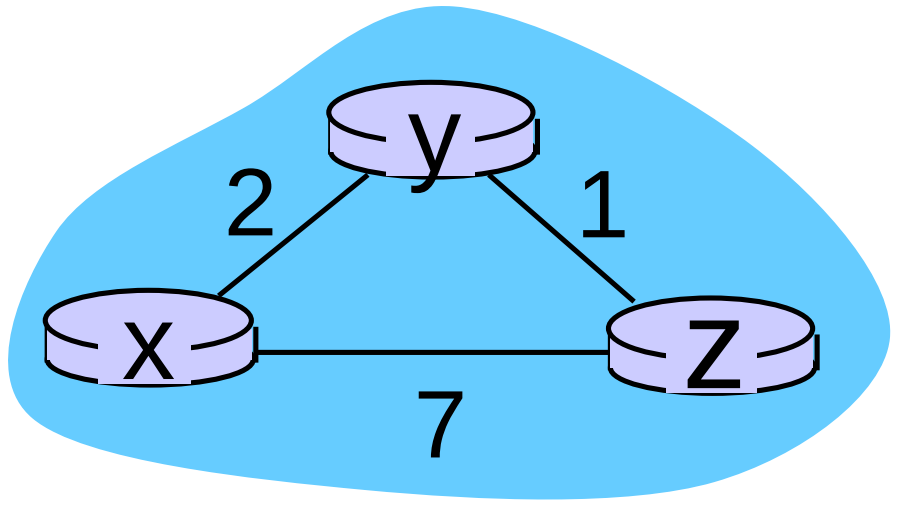

time

$$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\} = \min\{2+0\ ,\ 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\} = \min\{2+1\ ,\ 7+0\} = 3$$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	3	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

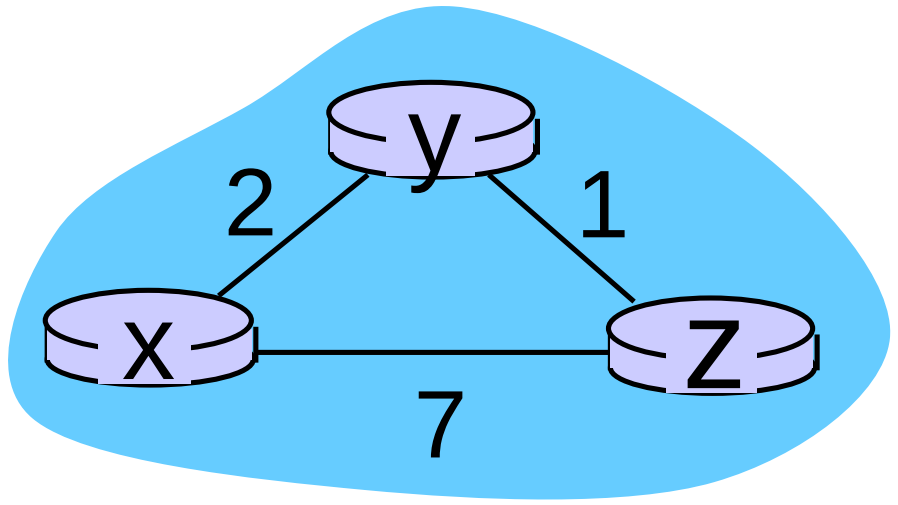

time

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- updates routing info, recalculates distance vector
- if DV changes, notify neighbors

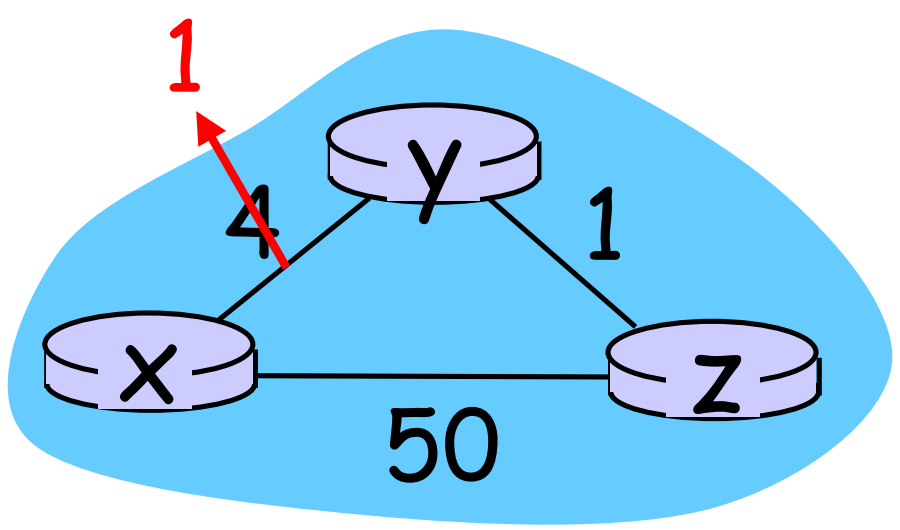

"good news travels fast"

t_0 : y detects link-cost change, updates its DV, informs its neighbors.

t_1 : z receives update from y, updates its table, computes new least cost to x , sends its neighbors its DV.

t_2 : y receives z's update, updates its distance table. y's least costs do *not* change, so y does *not* send a message to z.

Distance vector: link cost changes

link cost changes:

- node detects local link cost change
- *bad news travels slow* - "**count to infinity**" problem!
- Before: Dy(x)=4,Dy(z)=1,Dz(y)=1,Dz(x)=5
- At t0, y detects, link cost change. New Dy(x)=6
- T1, routing loop. Route through z to reach x from y. z routes through y to reach x, Dz(x)=7.
- 44 iterations before algorithm stabilizes

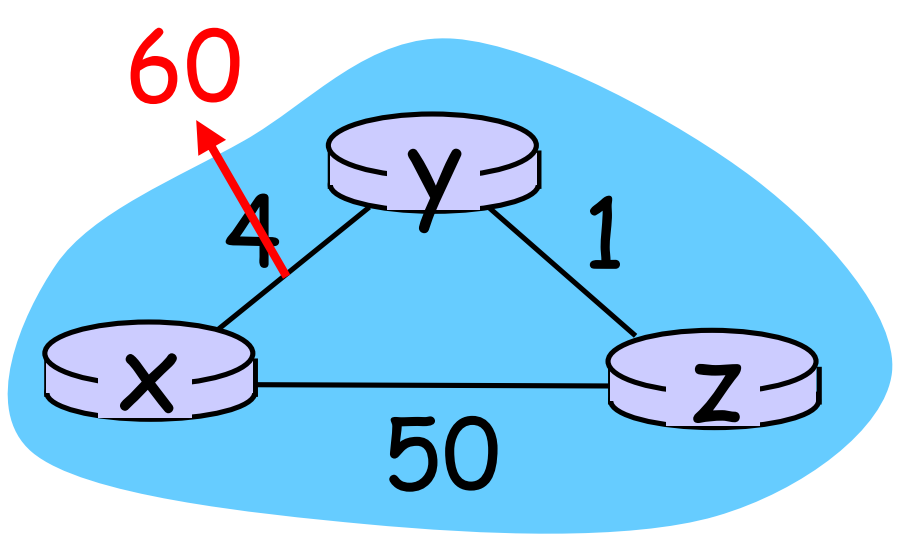

poisoned reverse:

- If Z routes through Y to get to X :
  - Z tells Y its (Z's) distance to X is infinite (so Y won't route to X via Z)
- will this completely solve count to infinity problem?

Comparison of LS and DV algorithms

message complexity

- **LS:** with n nodes, E links, O(nE) msgs sent
- **DV:** exchange between neighbors only
  - convergence time varies

speed of convergence

- **LS:** $O(n^2)$ algorithm requires O(nE) msgs
  - may have oscillations
- **DV:** convergence time varies
  - may be routing loops
  - count-to-infinity problem

robustness: what happens if router malfunctions?

LS:

- node can advertise incorrect *link* cost
- each node computes only its *own* table

DV:

- DV node can advertise incorrect *path* cost
- each node's table used by others
  - error propagate thru network

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Hierarchical routing

our routing study thus far - idealization

- all routers identical
- network "flat"

… *not* true in practice

scale: with 600 million destinations:

- can't store all dest's in routing tables!
- routing table exchange would swamp links!

administrative autonomy

- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical routing

- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
  - "intra-AS" routing protocol
  - routers in different AS can run different intra-AS routing protocol

gateway router:

- at "edge" of its own AS
- has link to router in another AS

Interconnected ASes

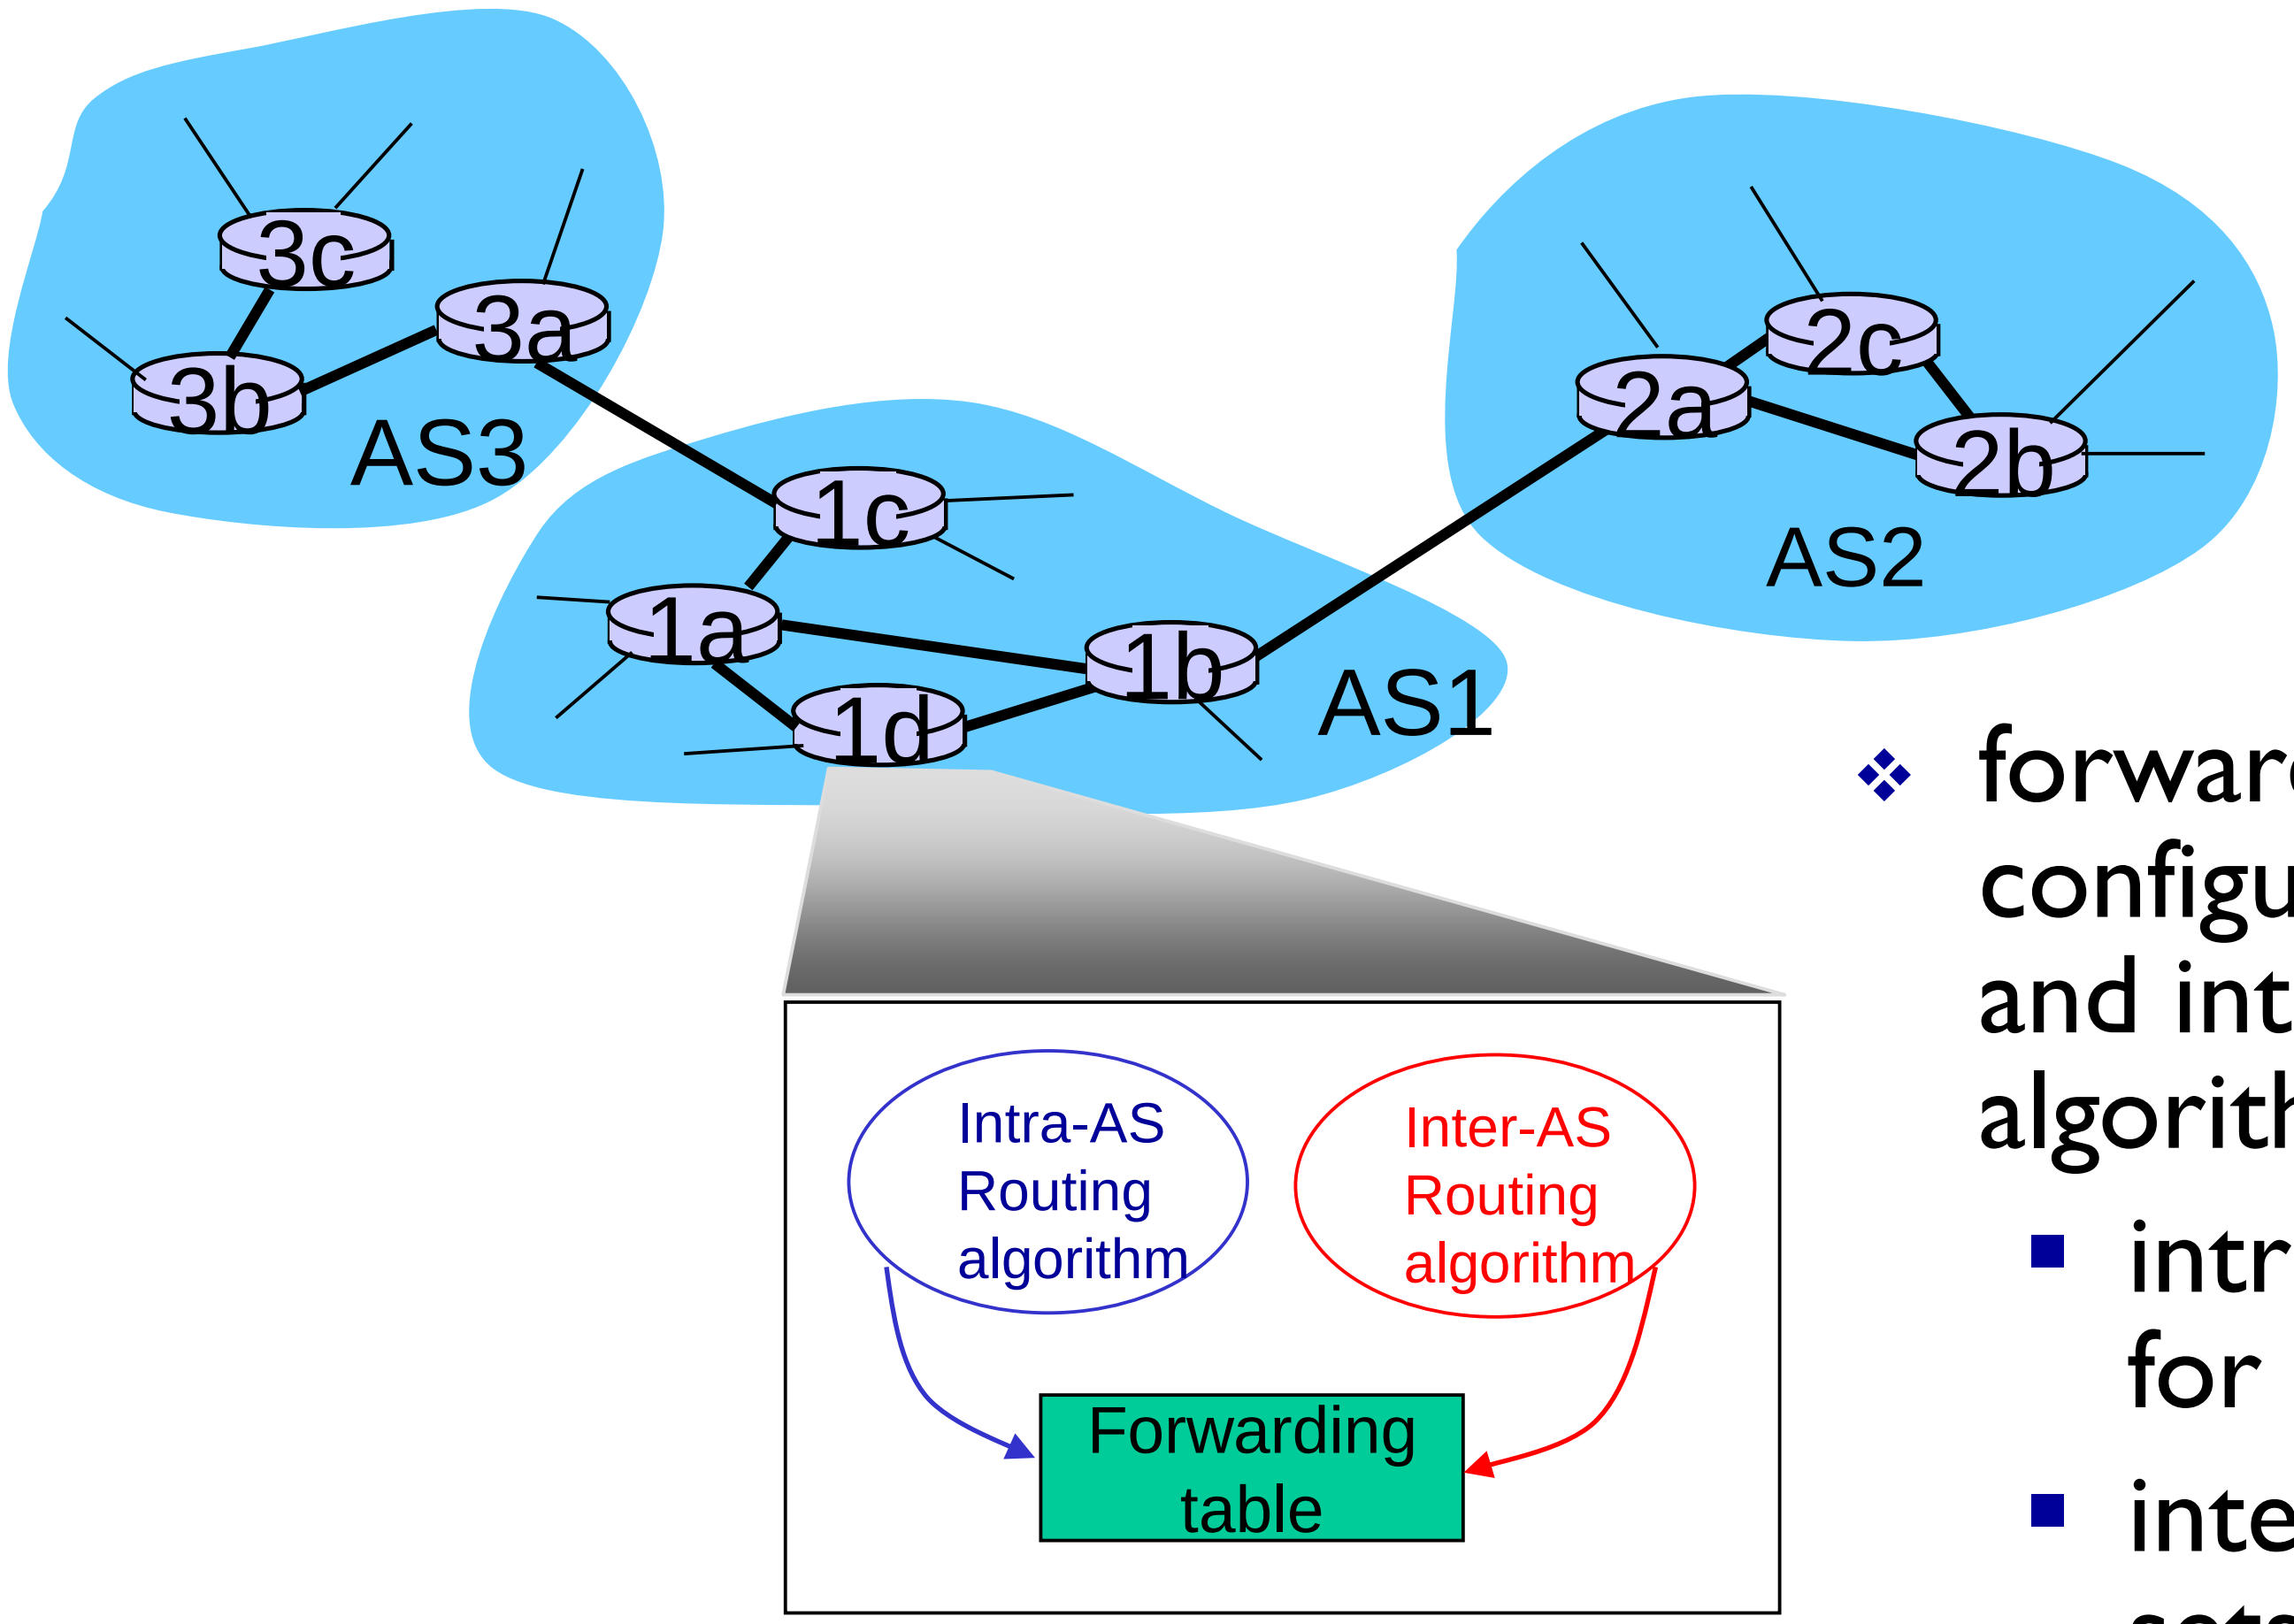

- forwarding table configured by both intra- and inter-AS routing algorithm
  - intra-AS sets entries for internal dests
  - inter-AS & intra-AS sets entries for external dests

Inter-AS tasks

- suppose router in AS1 receives datagram destined outside of AS1:
  - router should forward packet to gateway router, but which one?

AS1 must:

1. learn which dests are reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

job of inter-AS routing!

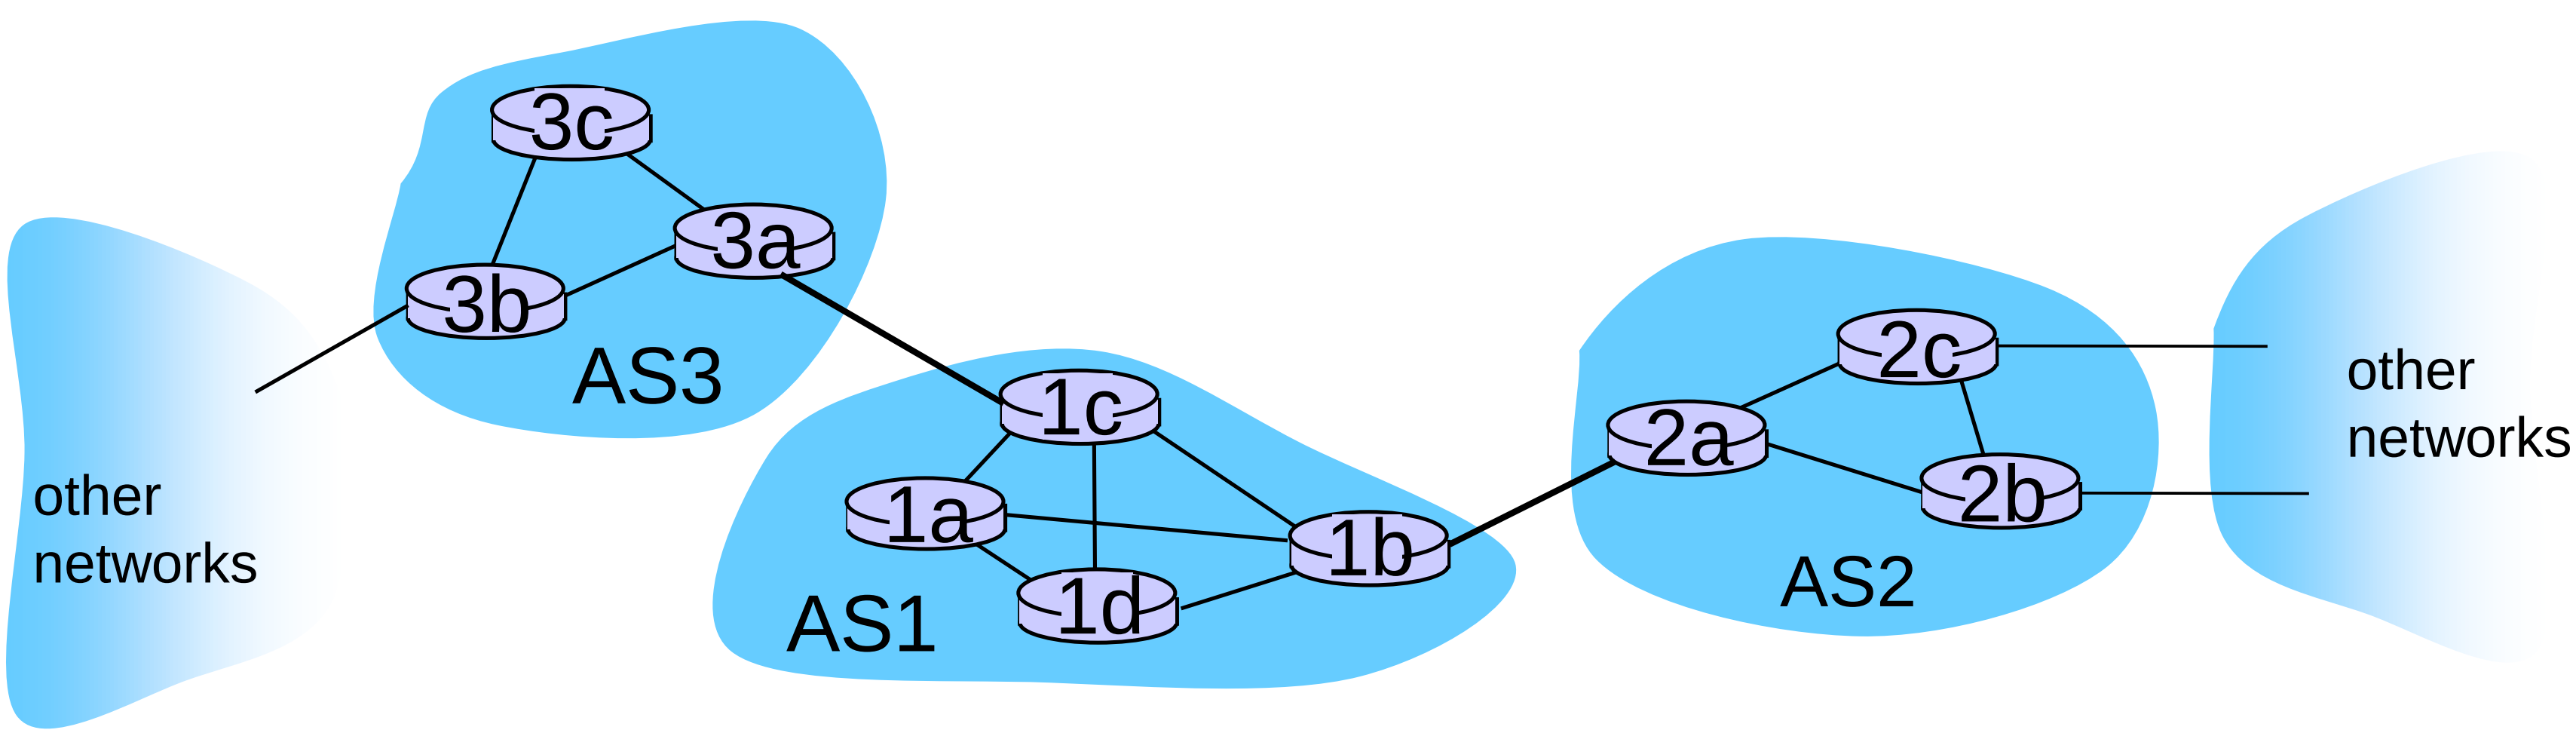

Chapter 4: outline

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Intra-AS Routing

- also known as *interior gateway protocols (IGP)*
- most common intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

RIP (Routing Information Protocol)

- included in BSD-UNIX distribution in 1982
- distance vector algorithm
  - distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka advertisement)
  - each advertisement: list of up to 25 destination *subnets* *(in IP addressing sense)*

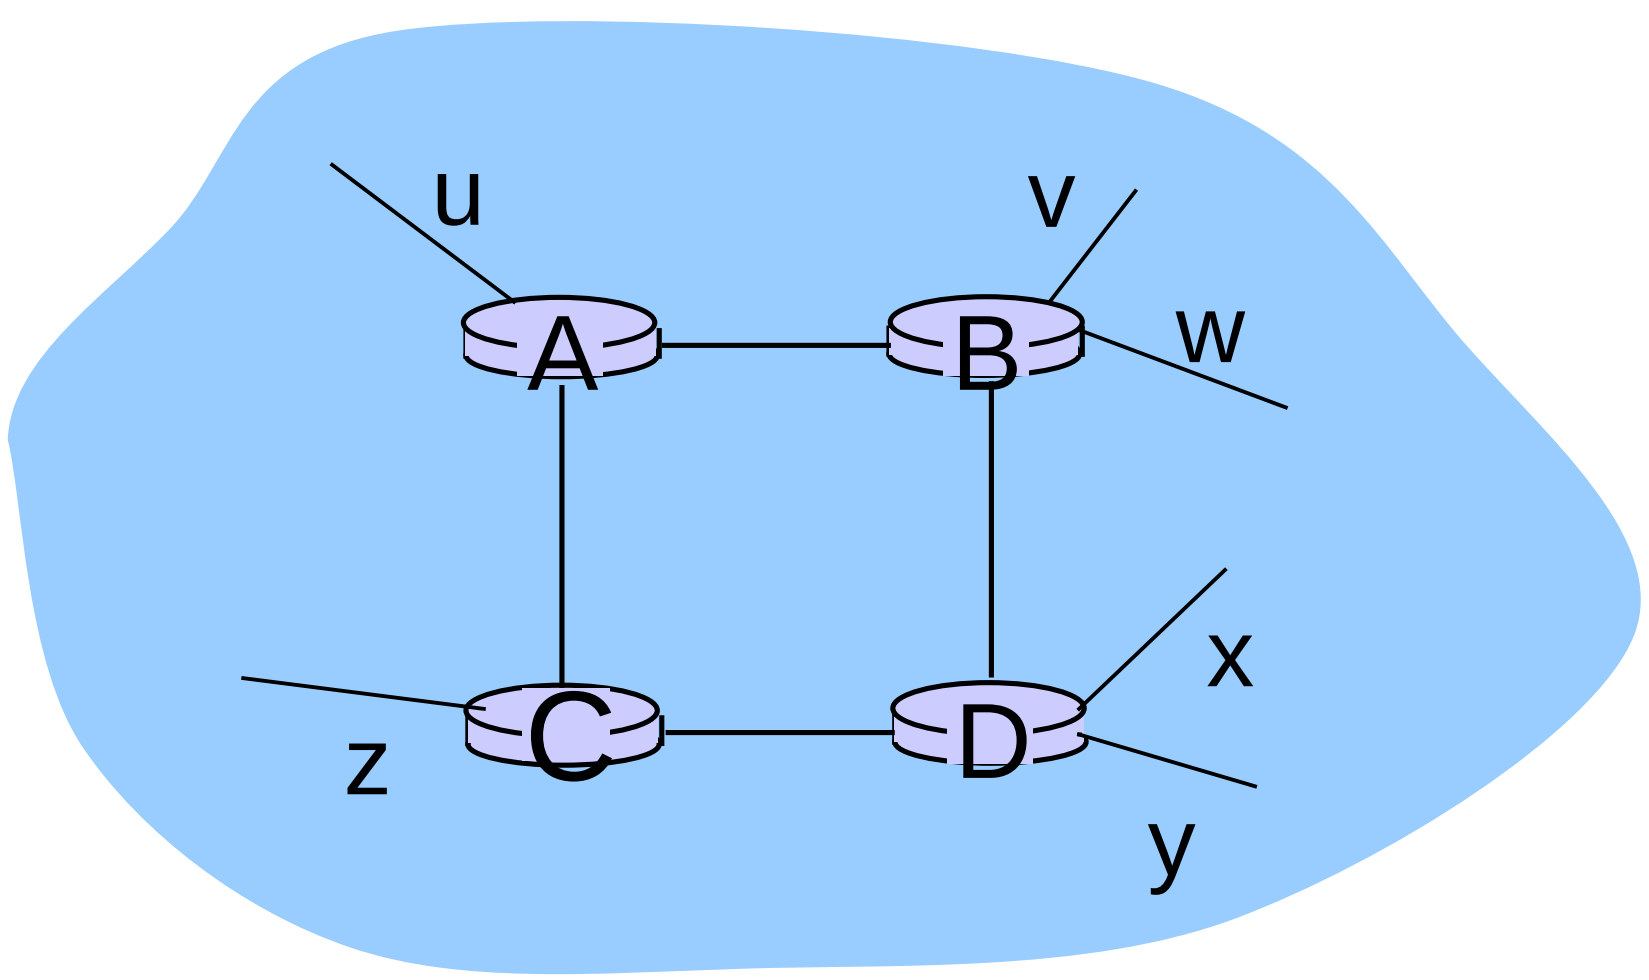

from router A to destination *subnets:*

subnet	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP: example

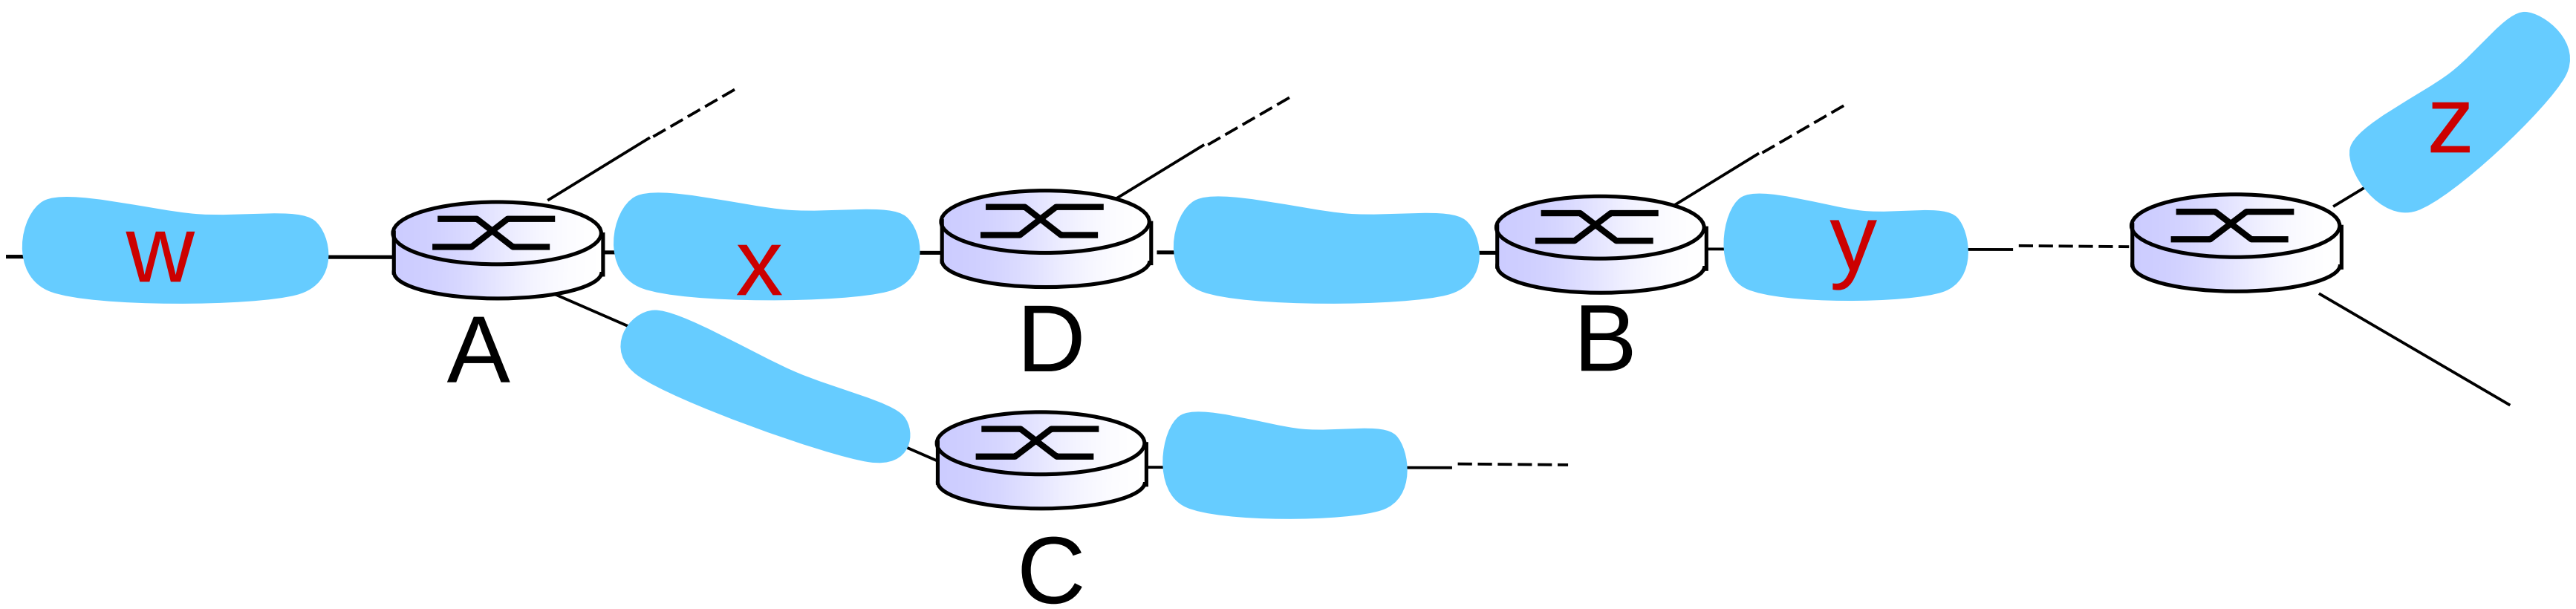

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	B	7
x	--	1
….	….	….

RIP: example

A-to-D advertisement

dest	next	hops
w	-	1
x	-	1
z	C	4
….	…	

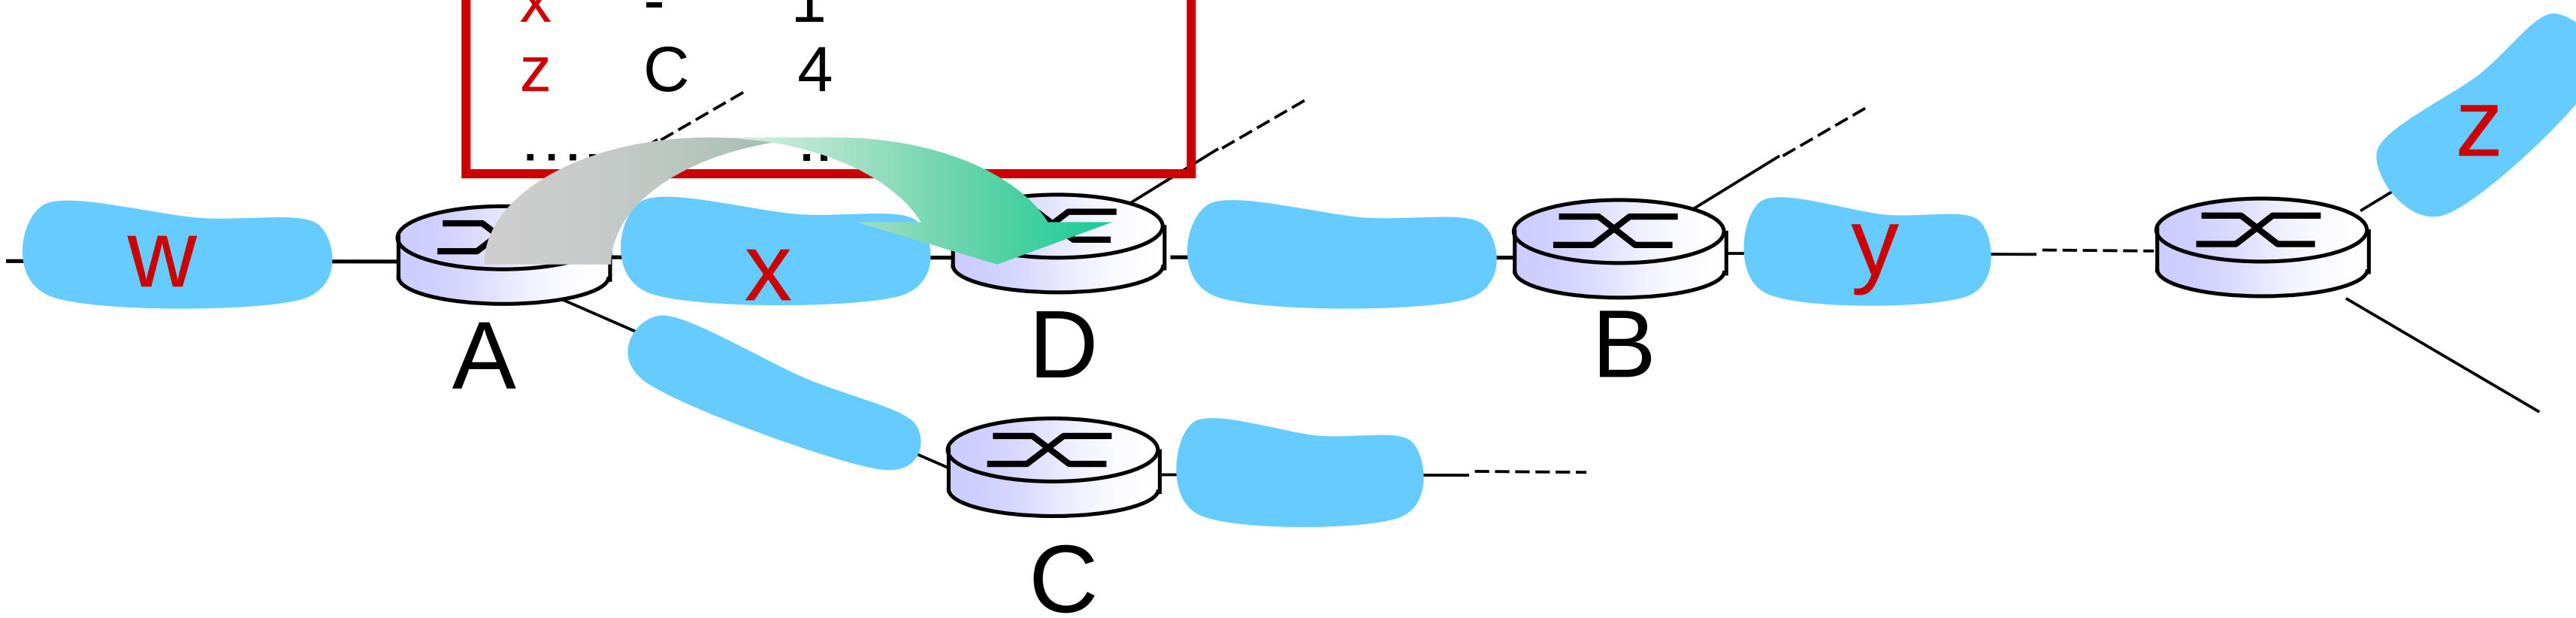

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	~~B~~ A	~~7~~ 5
x	--	1
….	….	….

RIP: link failure, recovery

if no advertisement heard after 180 sec --> neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly propagates to entire net

OSPF (Open Shortest Path First)

- "open": publicly available
- uses link state algorithm
  - LS packet dissemination
  - topology map at each node
  - route computation using Dijkstra's algorithm
- OSPF advertisement carries one entry per neighbor
- advertisements flooded to *entire* AS

OSPF "advanced" features (not in RIP)

- *security:* all OSPF messages authenticated (to prevent malicious intrusion)
- multiple same-cost paths allowed (only one path in RIP)
- for each link, multiple cost metrics for different TOS (e.g., satellite link cost set "low" for best effort ToS; high for real time ToS)
- integrated uni- and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- hierarchical OSPF in large domains.

Hierarchical OSPF

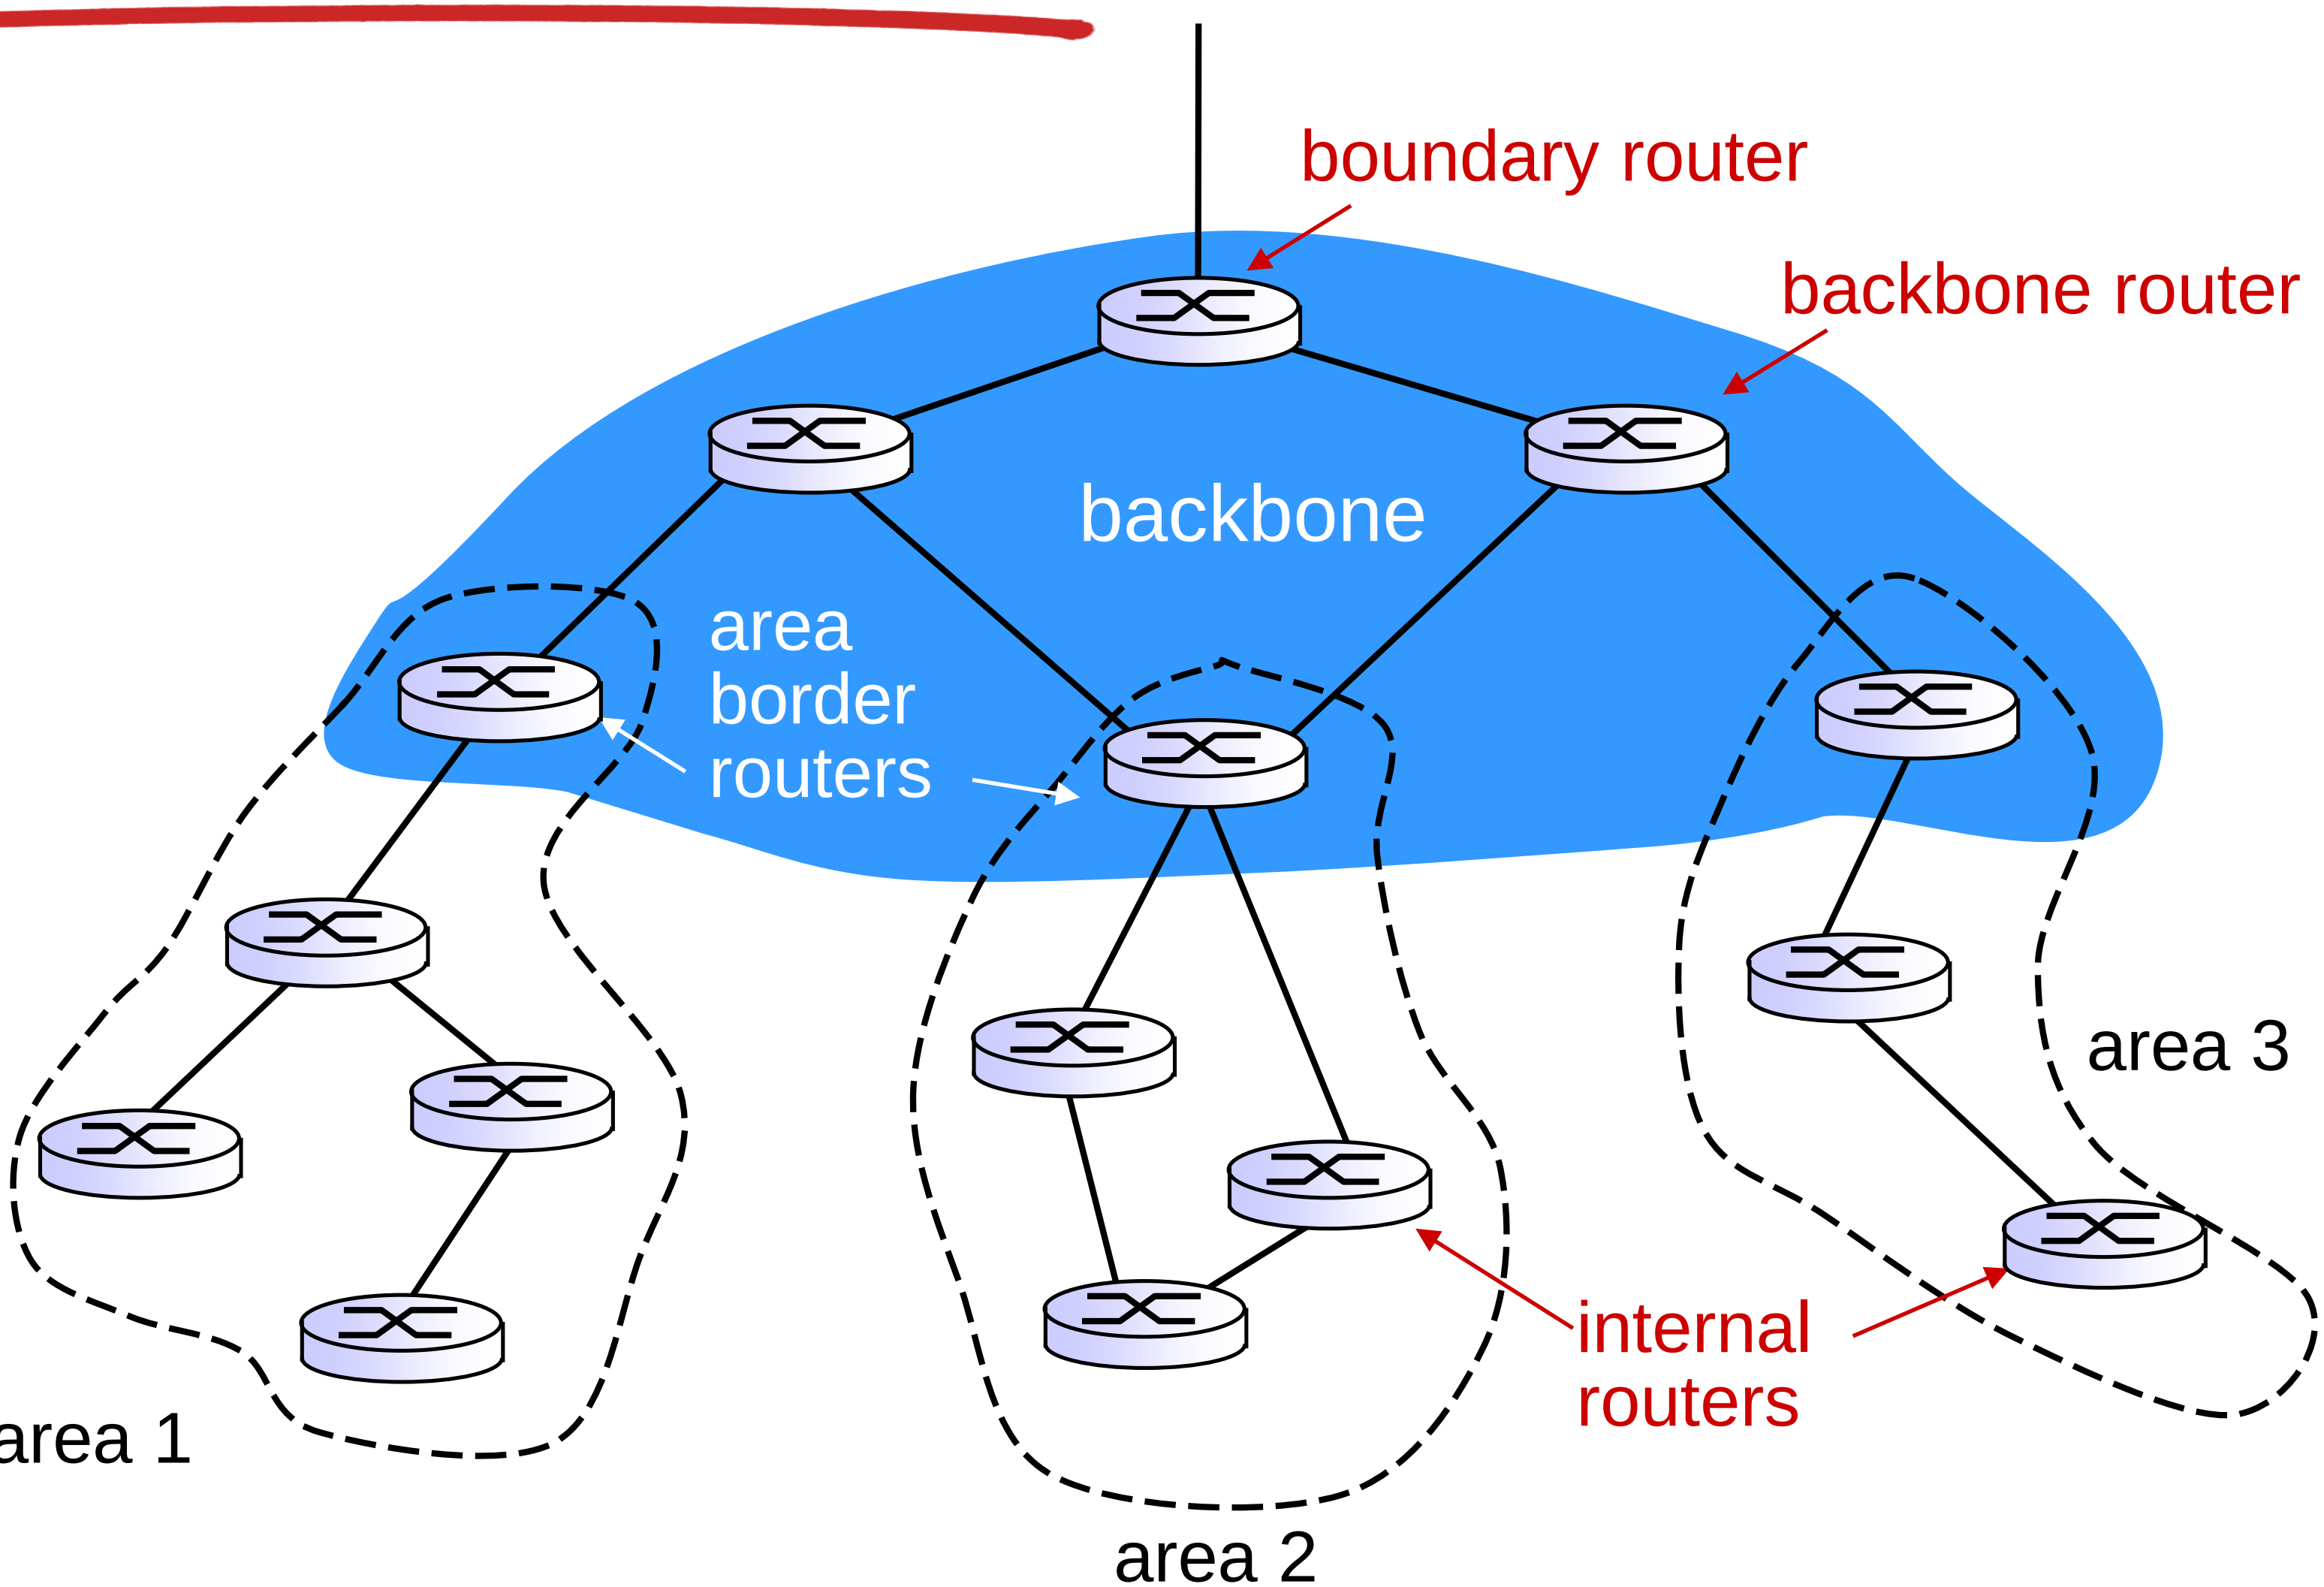

Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): *the* de facto inter-domain routing protocol
  - "glue that holds the Internet together"
- BGP provides each AS a means to:
  - eBGP: obtain subnet reachability information from neighboring ASs.
  - iBGP: propagate reachability information to all AS-internal routers.
  - determine "good" routes to other networks based on reachability information and policy.
- allows subnet to advertise its existence to rest of Internet: *"I am here"*

BGP basics

- **BGP session:** two BGP routers ("peers") exchange BGP messages:
  - advertising *paths* to different destination network prefixes ("path vector" protocol)
  - exchanged over semi-permanent TCP connections
- when AS3 advertises a prefix to AS1:
  - AS3 *promises* it will forward datagrams towards that prefix
  - AS3 can aggregate prefixes in its advertisement

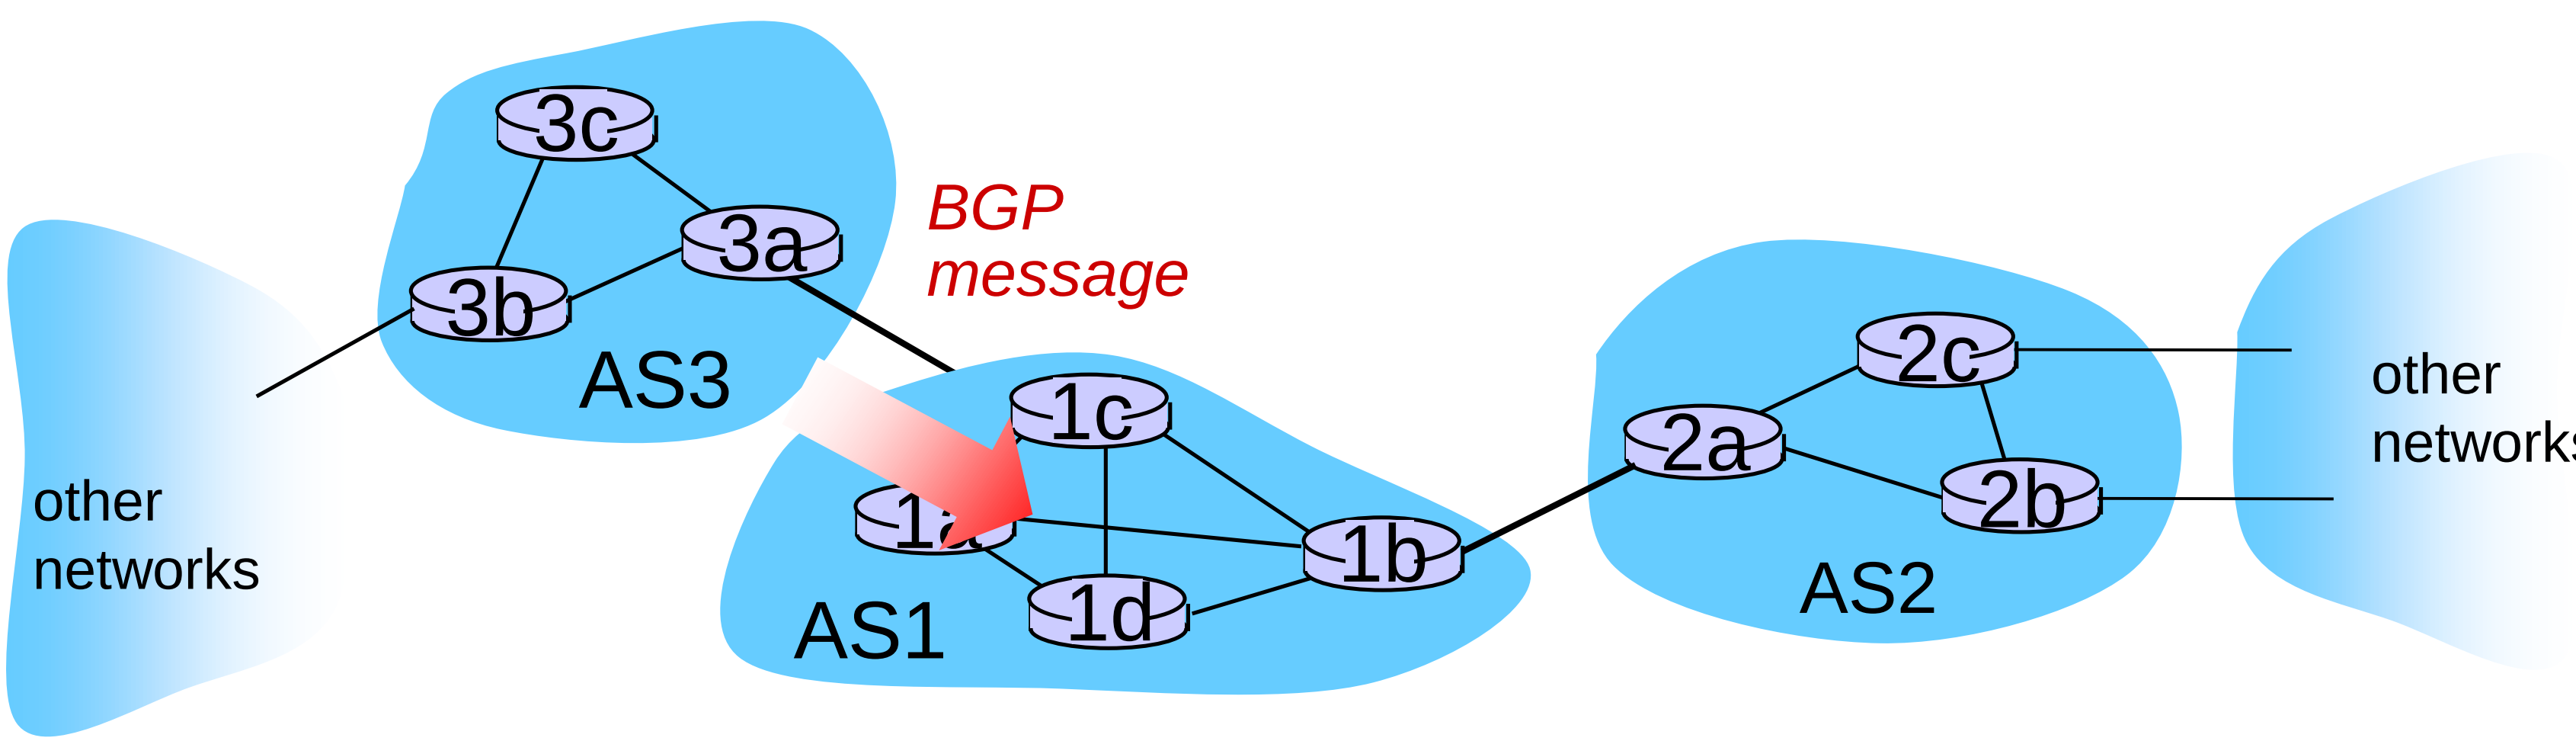

BGP basics: distributing path information

- using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
  - 1c can then use iBGP do distribute new prefix info to all routers in AS1
  - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- when router learns of new prefix, it creates entry for prefix in its forwarding table.

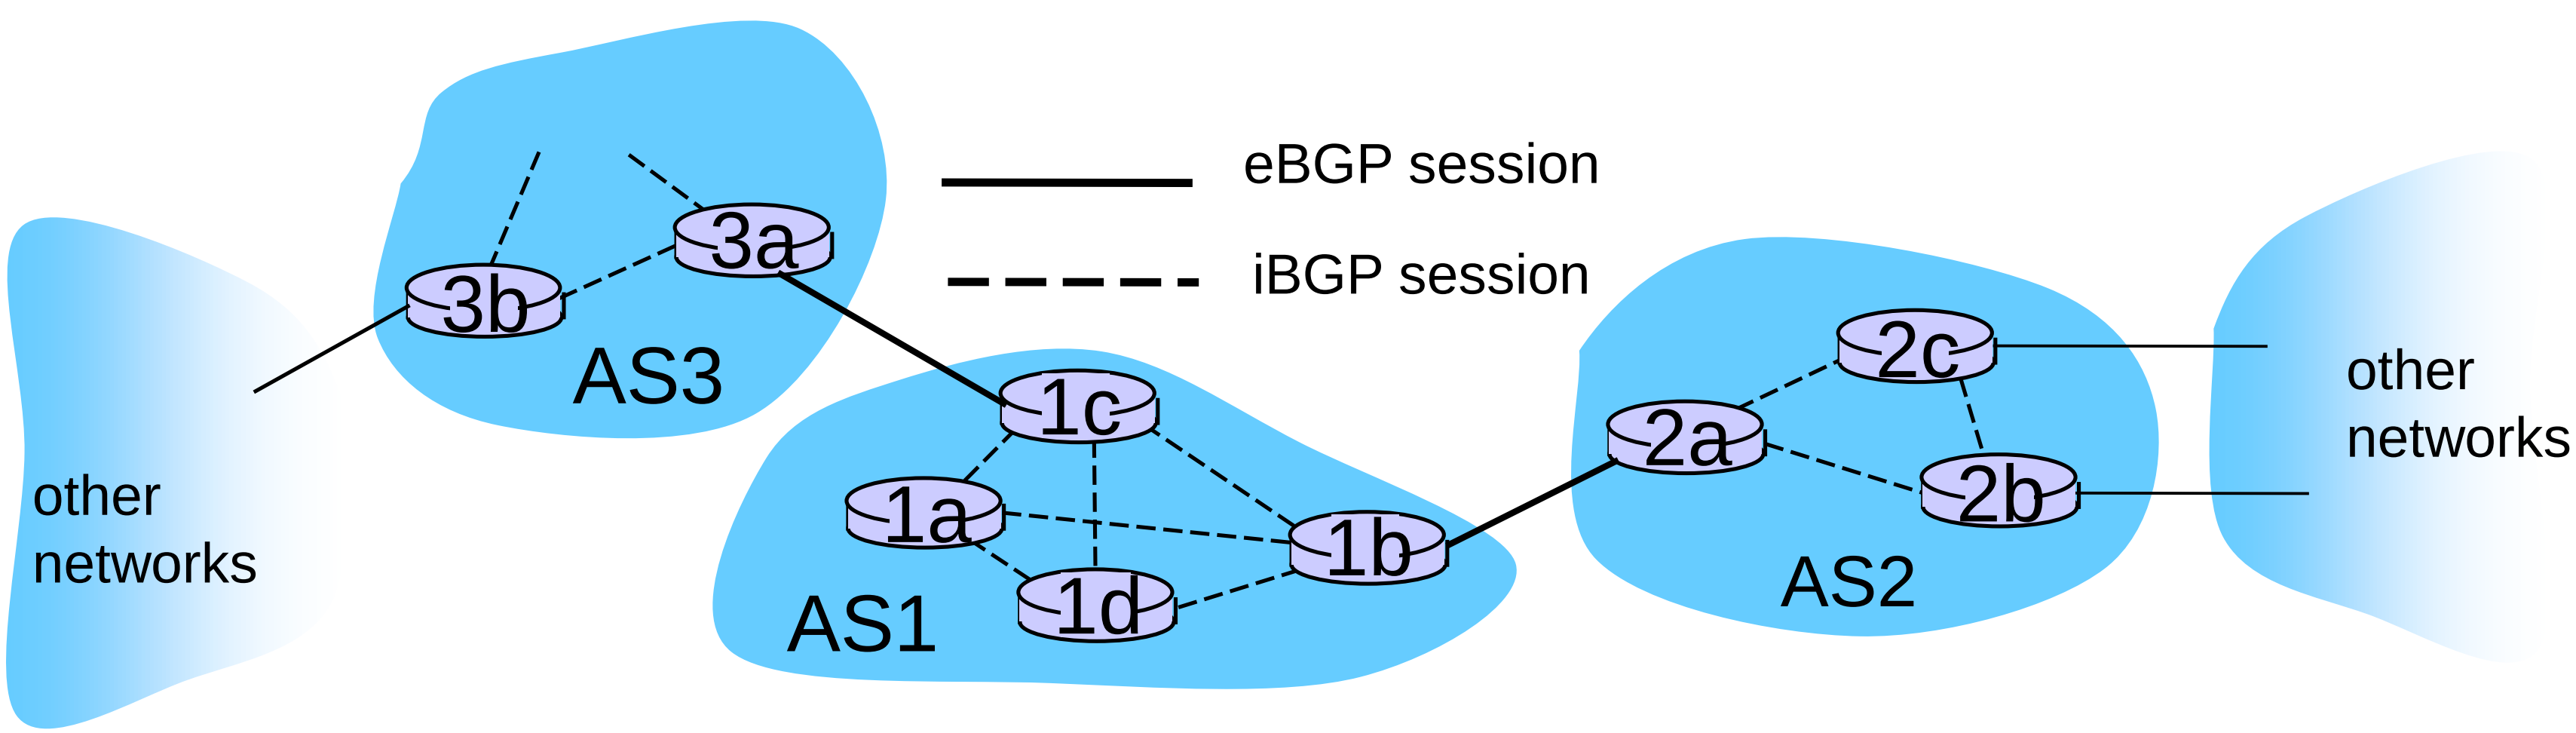

Path attributes and BGP routes

- advertised prefix includes BGP attributes
  - prefix + attributes = “route”
- two important attributes:
  - AS-PATH: contains ASs through which prefix advertisement has passed: e.g., AS 67, AS 17
  - NEXT-HOP: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)

BGP route selection

- router may learn about more than 1 route to destination AS, selects route based on:
  1. local preference value attribute
  2. shortest AS-PATH
  3. closest NEXT-HOP router
  4. additional criteria

BGP messages

- BGP messages exchanged between peers over TCP connection
- BGP messages:
  - OPEN: opens TCP connection to peer and authenticates sender
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE: keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

Putting it Altogether: *How Does an Entry Get Into a Router's Forwarding Table?*

- Answer is complicated!
- Ties together hierarchical routing with BGP and OSPF.
- Provides nice overview of BGP!

How does entry get in forwarding table?

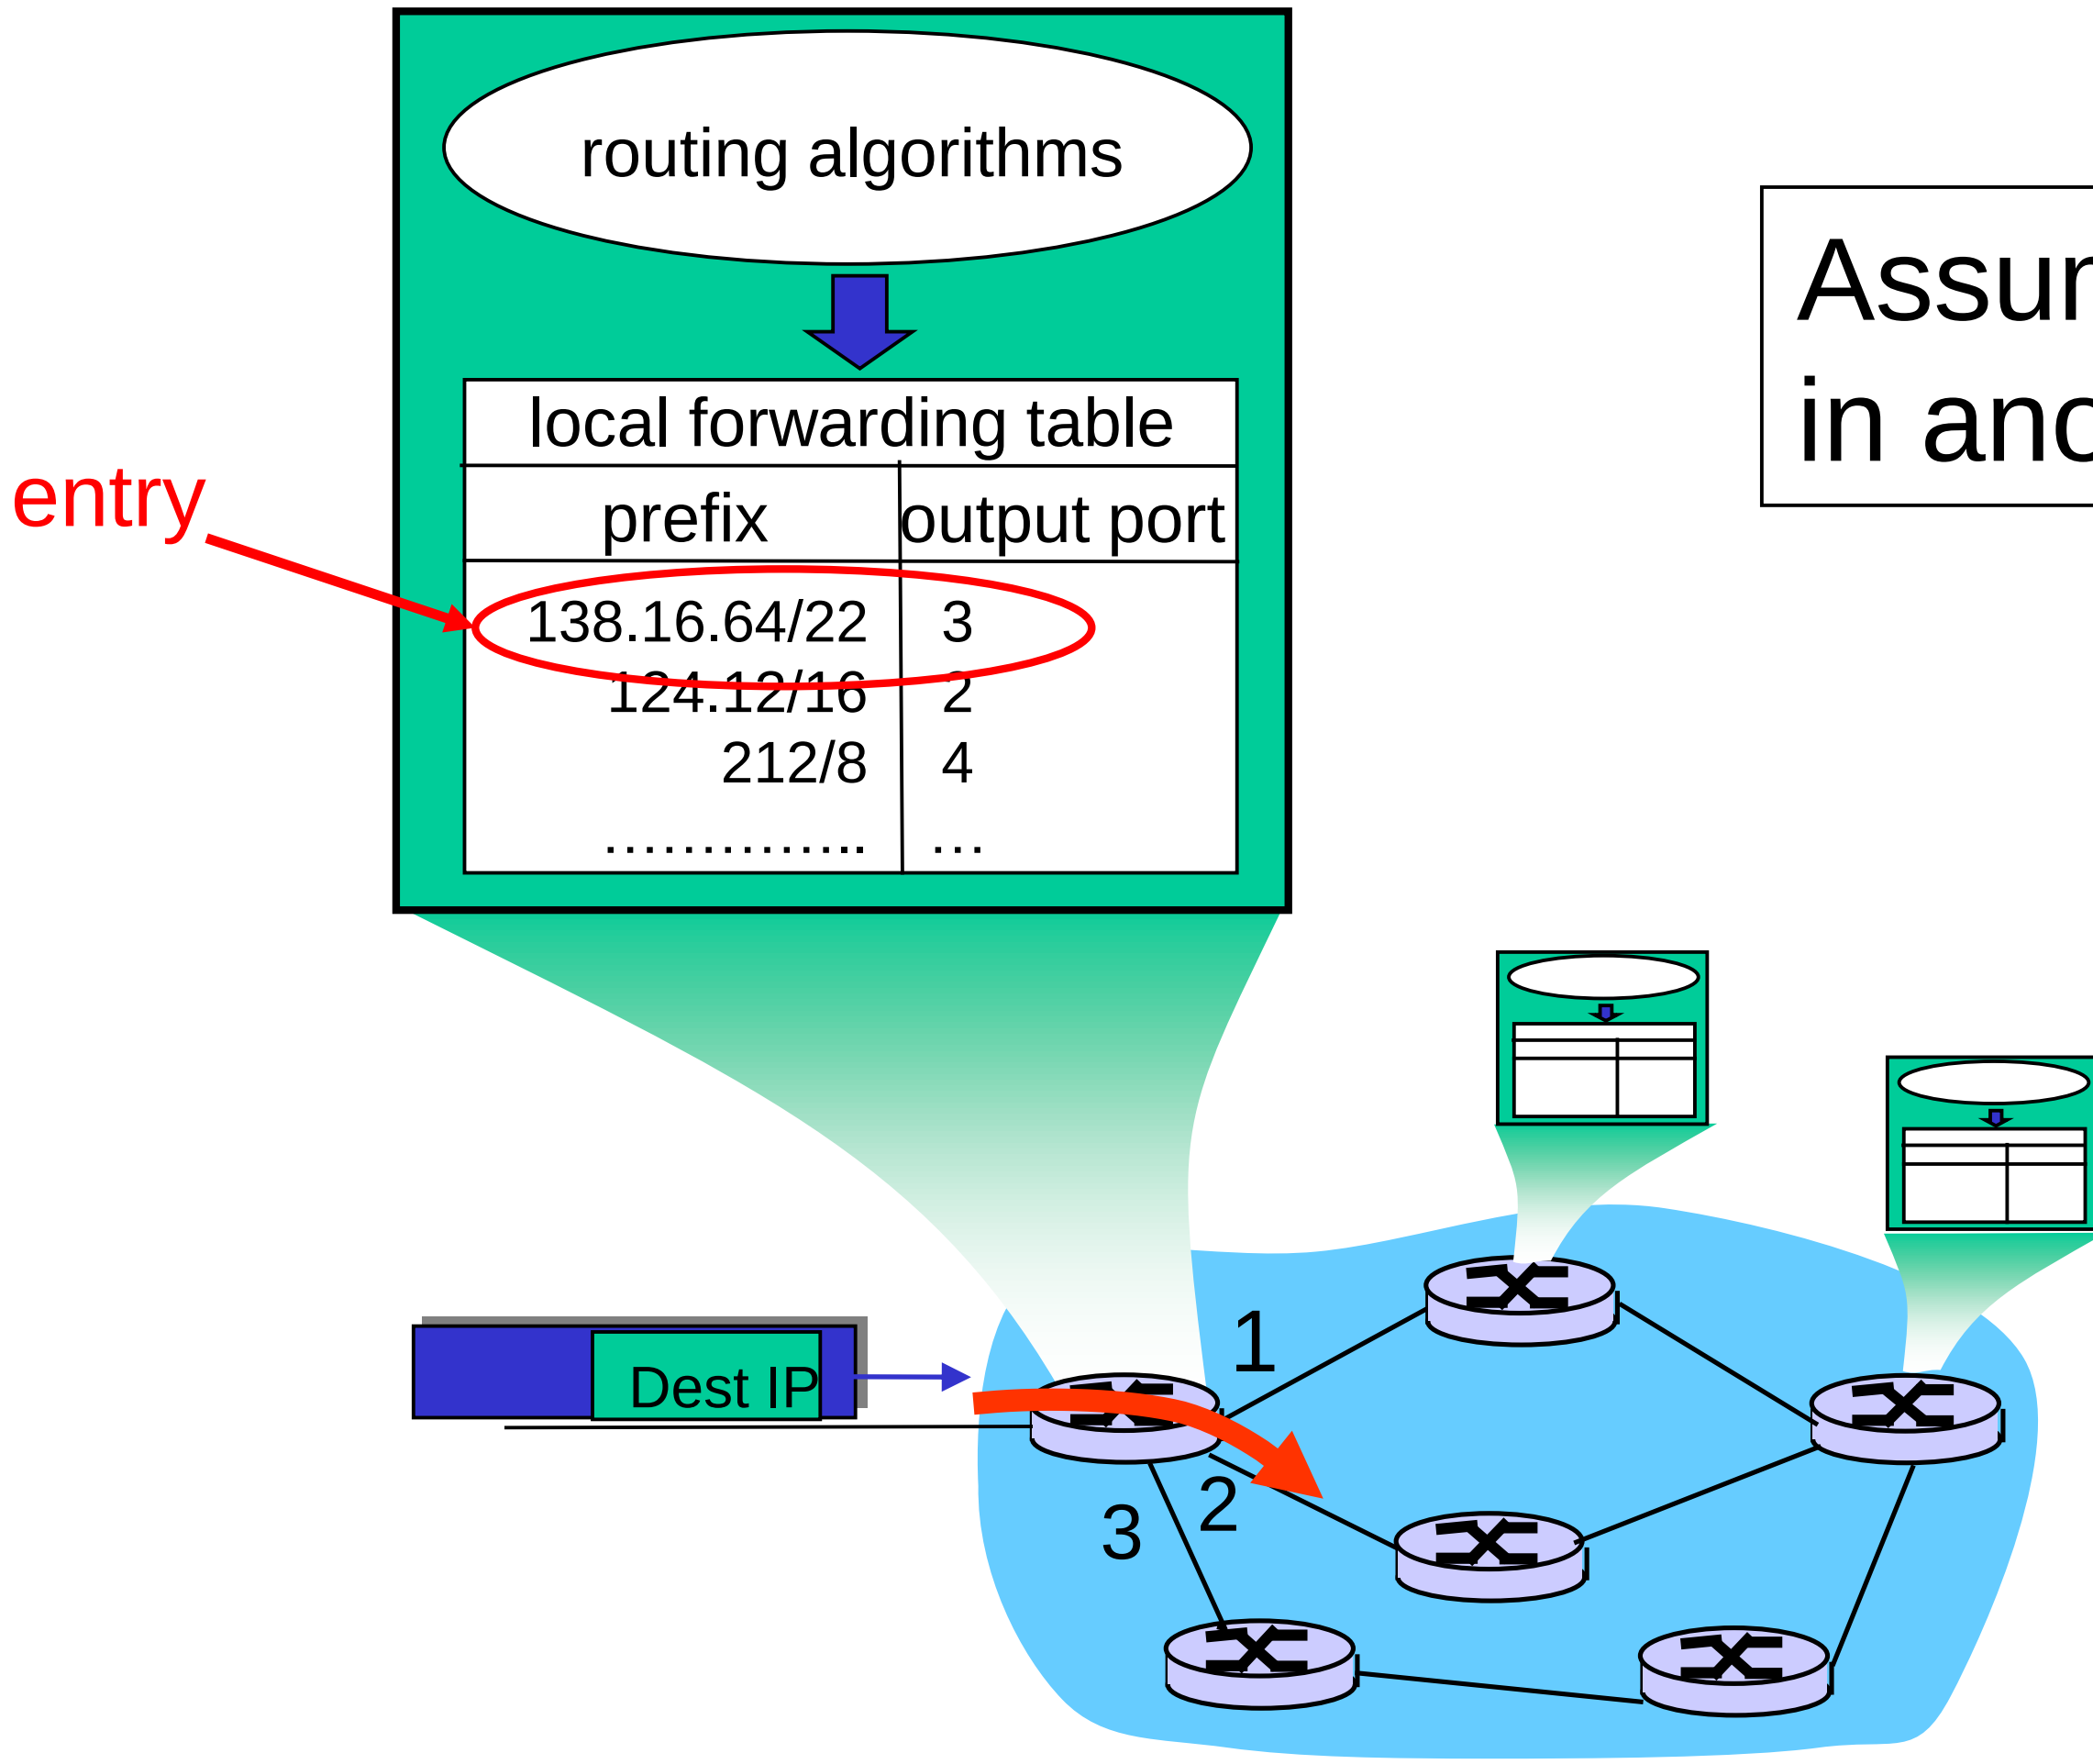

Assume prefix is in another AS.

How does entry get in forwarding table?

High-level overview

1. Router becomes aware of prefix
2. Router determines output port for prefix
3. Router enters prefix-port in forwarding table

Router becomes aware of prefix

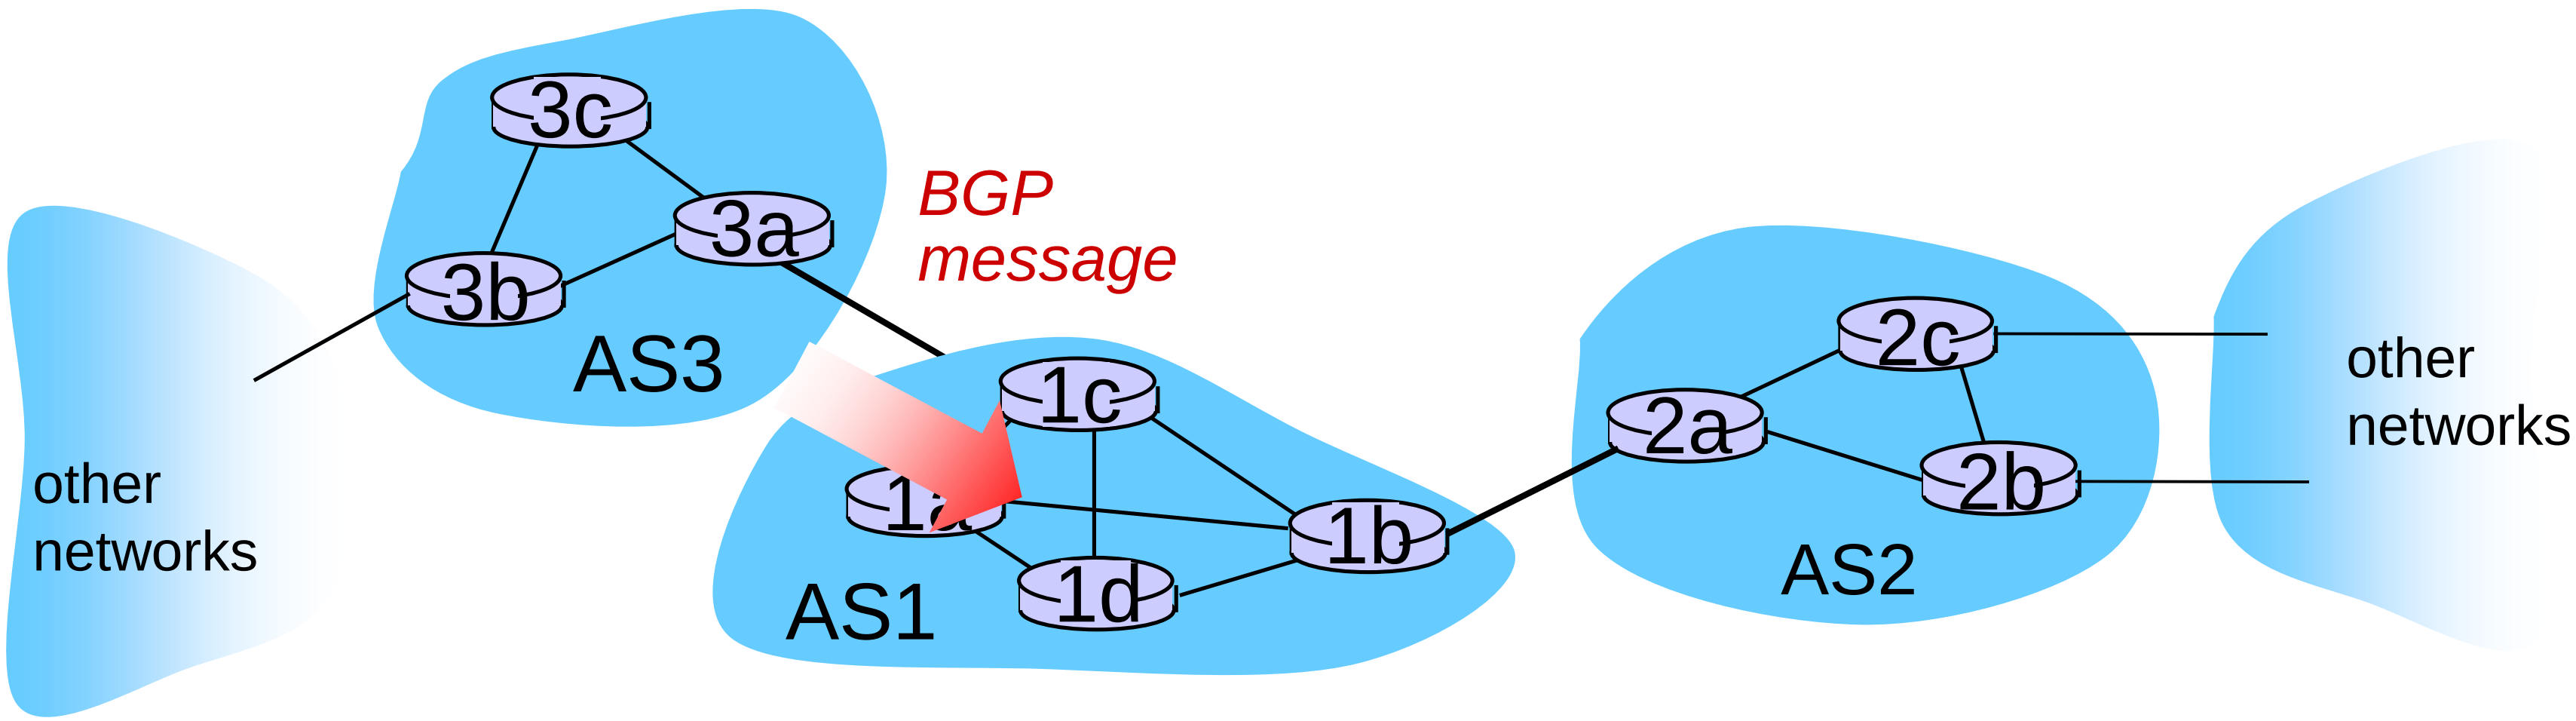

- BGP message contains "routes"
- "route" is a prefix and attributes: AS-PATH, NEXT-HOP,…
- Example: route:
  - Prefix:138.16.64/22 ; AS-PATH: AS3 AS131 ; NEXT-HOP: 201.44.13.125

Router may receive multiple routes

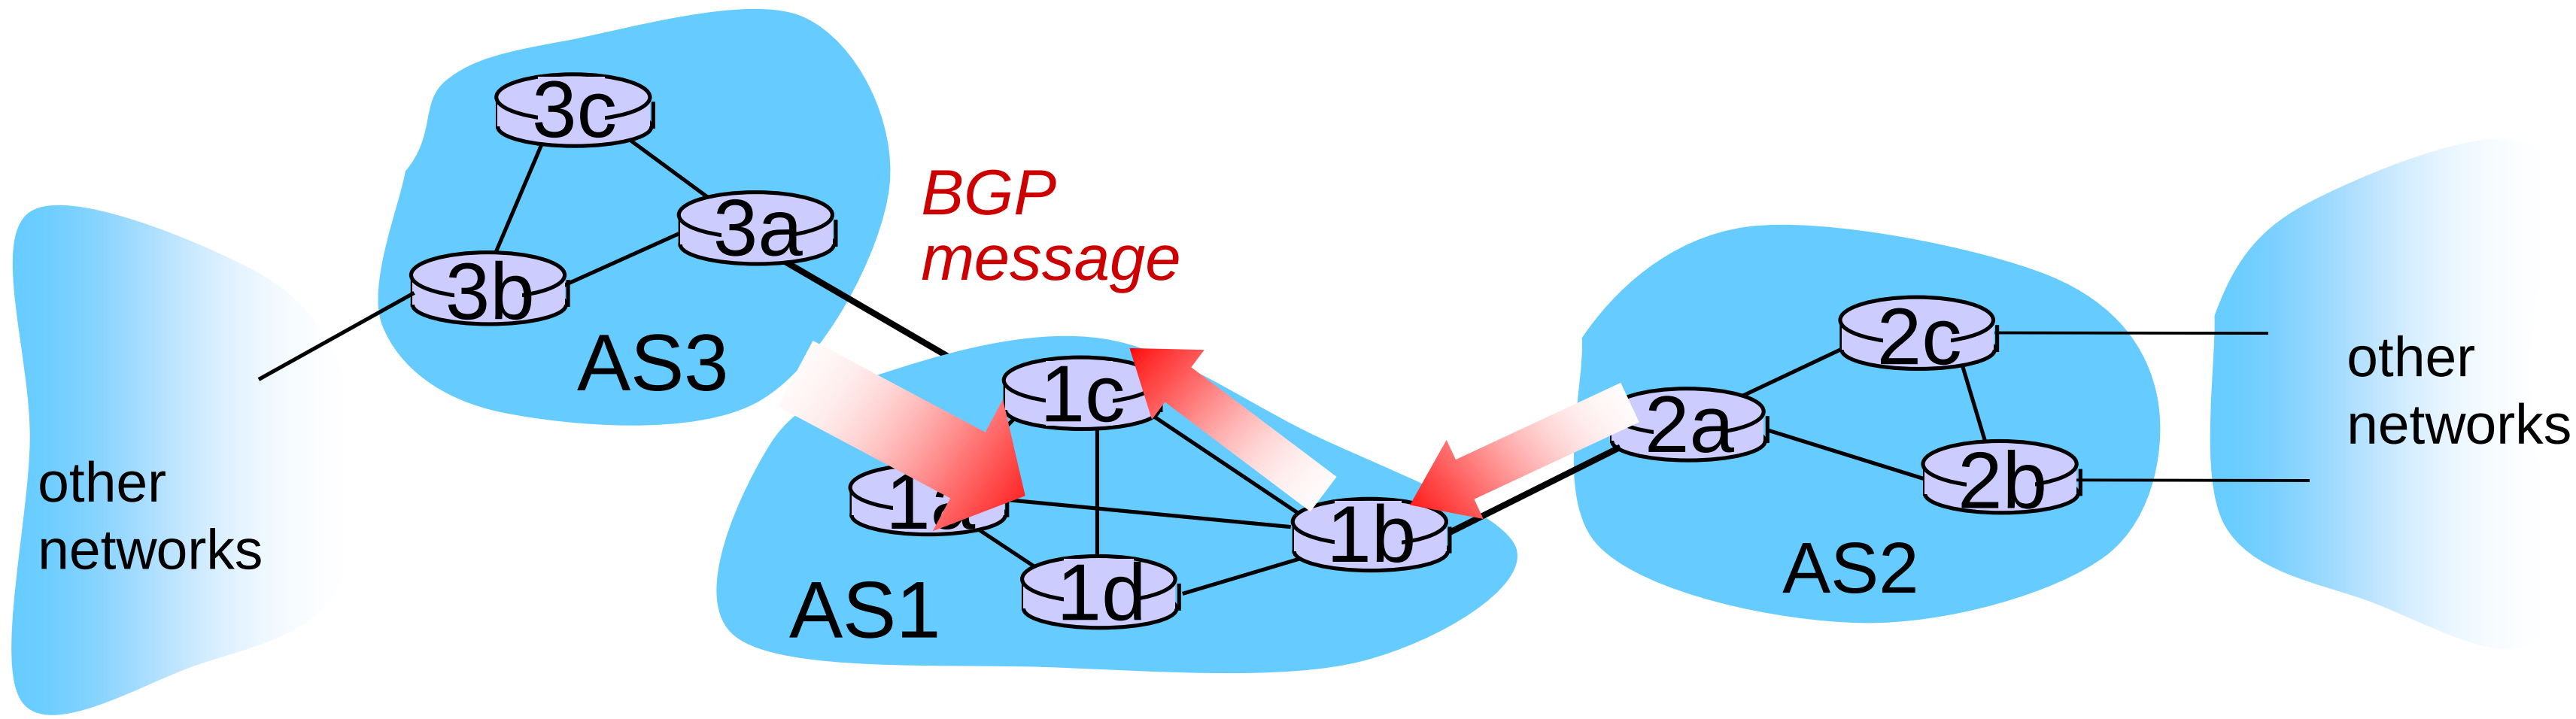

- Router may receive multiple routes for <u>same</u> prefix
- Has to select one route

Select best BGP route to prefix

- Router selects route based on shortest AS-PATH

- Example:

  select

  - AS2 AS17 to 138.16.64/22
  - AS3 AS131 AS201 to 138.16.64/22

- What if there is a tie? We'll come back to that!

Find best intra-route to BGP route

- Use selected route's NEXT-HOP attribute
  - Route's NEXT-HOP attribute is the IP address of the router interface that begins the AS PATH.
- Example:
  - AS-PATH: AS2 AS17 ; NEXT-HOP: 111.99.86.55
- Router uses OSPF to find shortest path from 1c to 111.99.86.55

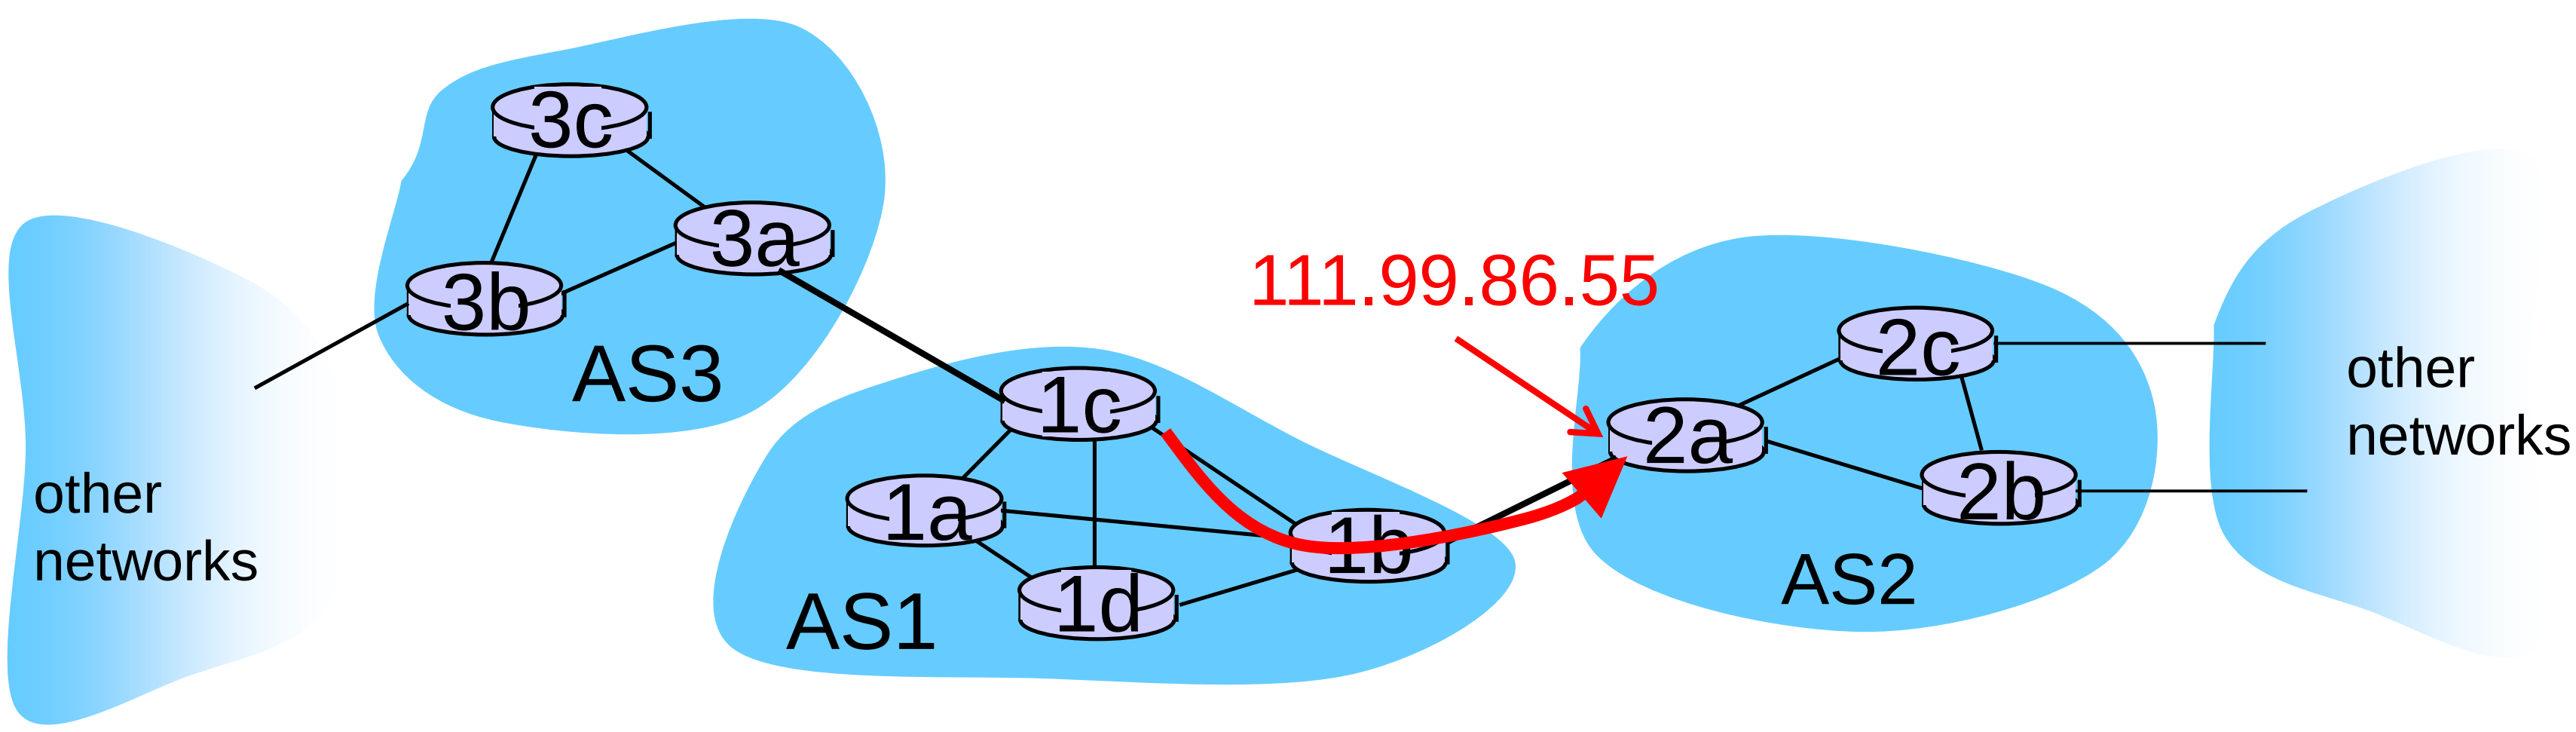

Router identifies port for route

- Identifies port along the OSPF shortest path
- Adds prefix-port entry to its forwarding table:
  - (138.16.64/22 , port 4)

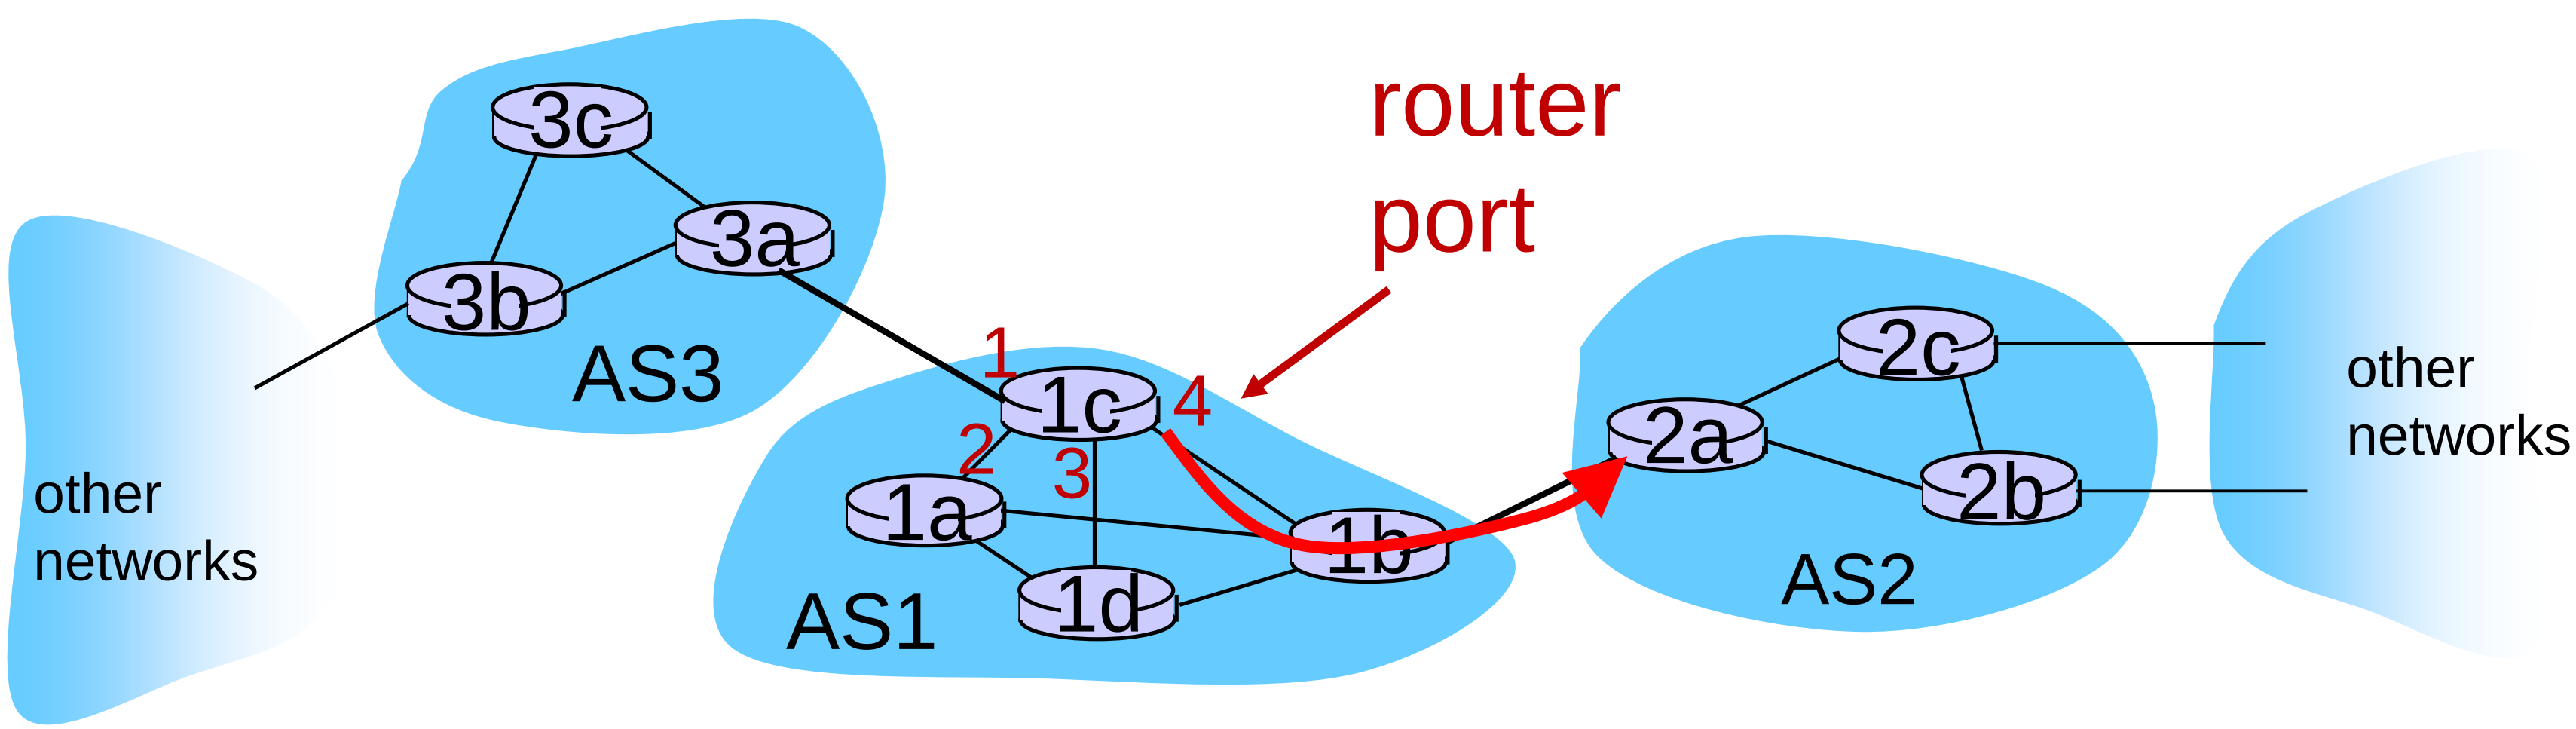

Hot Potato Routing

- Suppose there two or more best inter-routes.
- Then choose route with closest NEXT-HOP
  - Use OSPF to determine which gateway is closest
  - Q: From 1c, chose AS3 AS131 or AS2 AS17?
  - A: route AS3 AS201 since it is closer

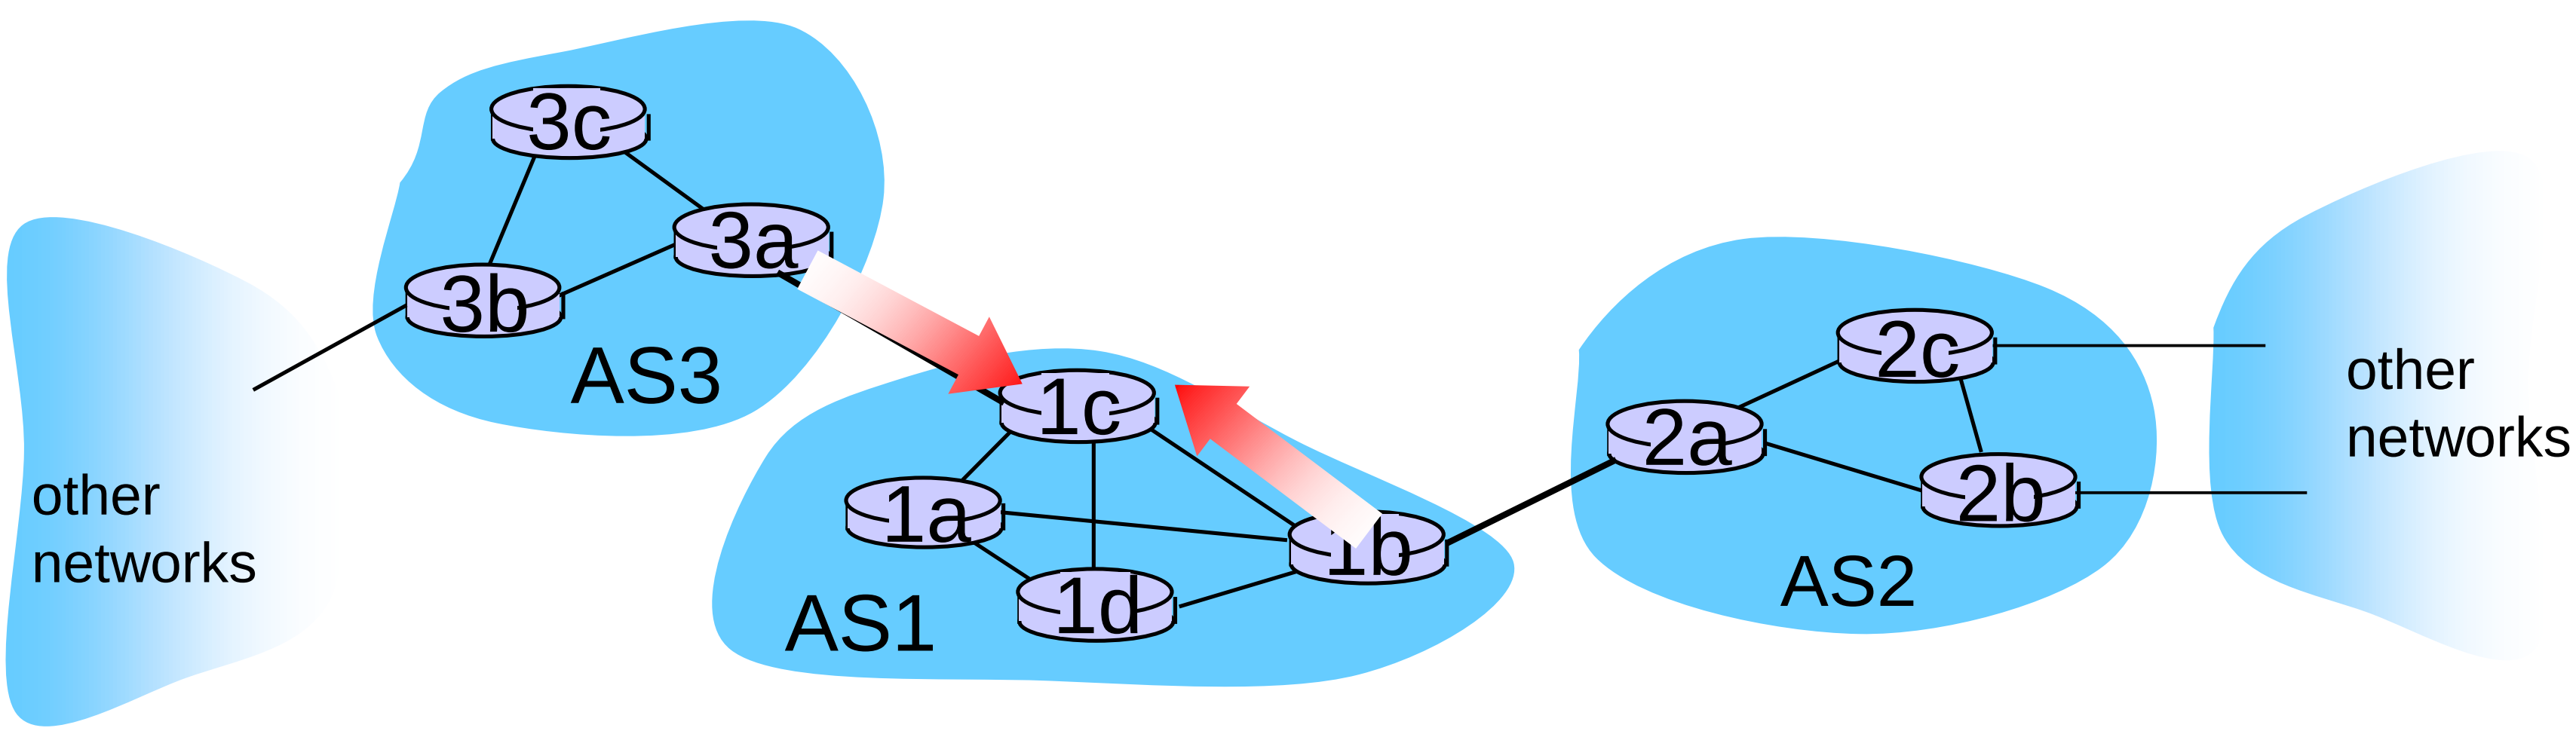

How does entry get in forwarding table?

Summary

1. Router becomes aware of prefix
   - via BGP route advertisements from other routers
2. Determine router output port for prefix
   - Use BGP route selection to find best inter-AS route
   - Use OSPF to find best intra-AS route leading to best inter-AS route
   - Router identifies router port for that best route
3. Enter prefix-port entry in forwarding table

BGP routing policy

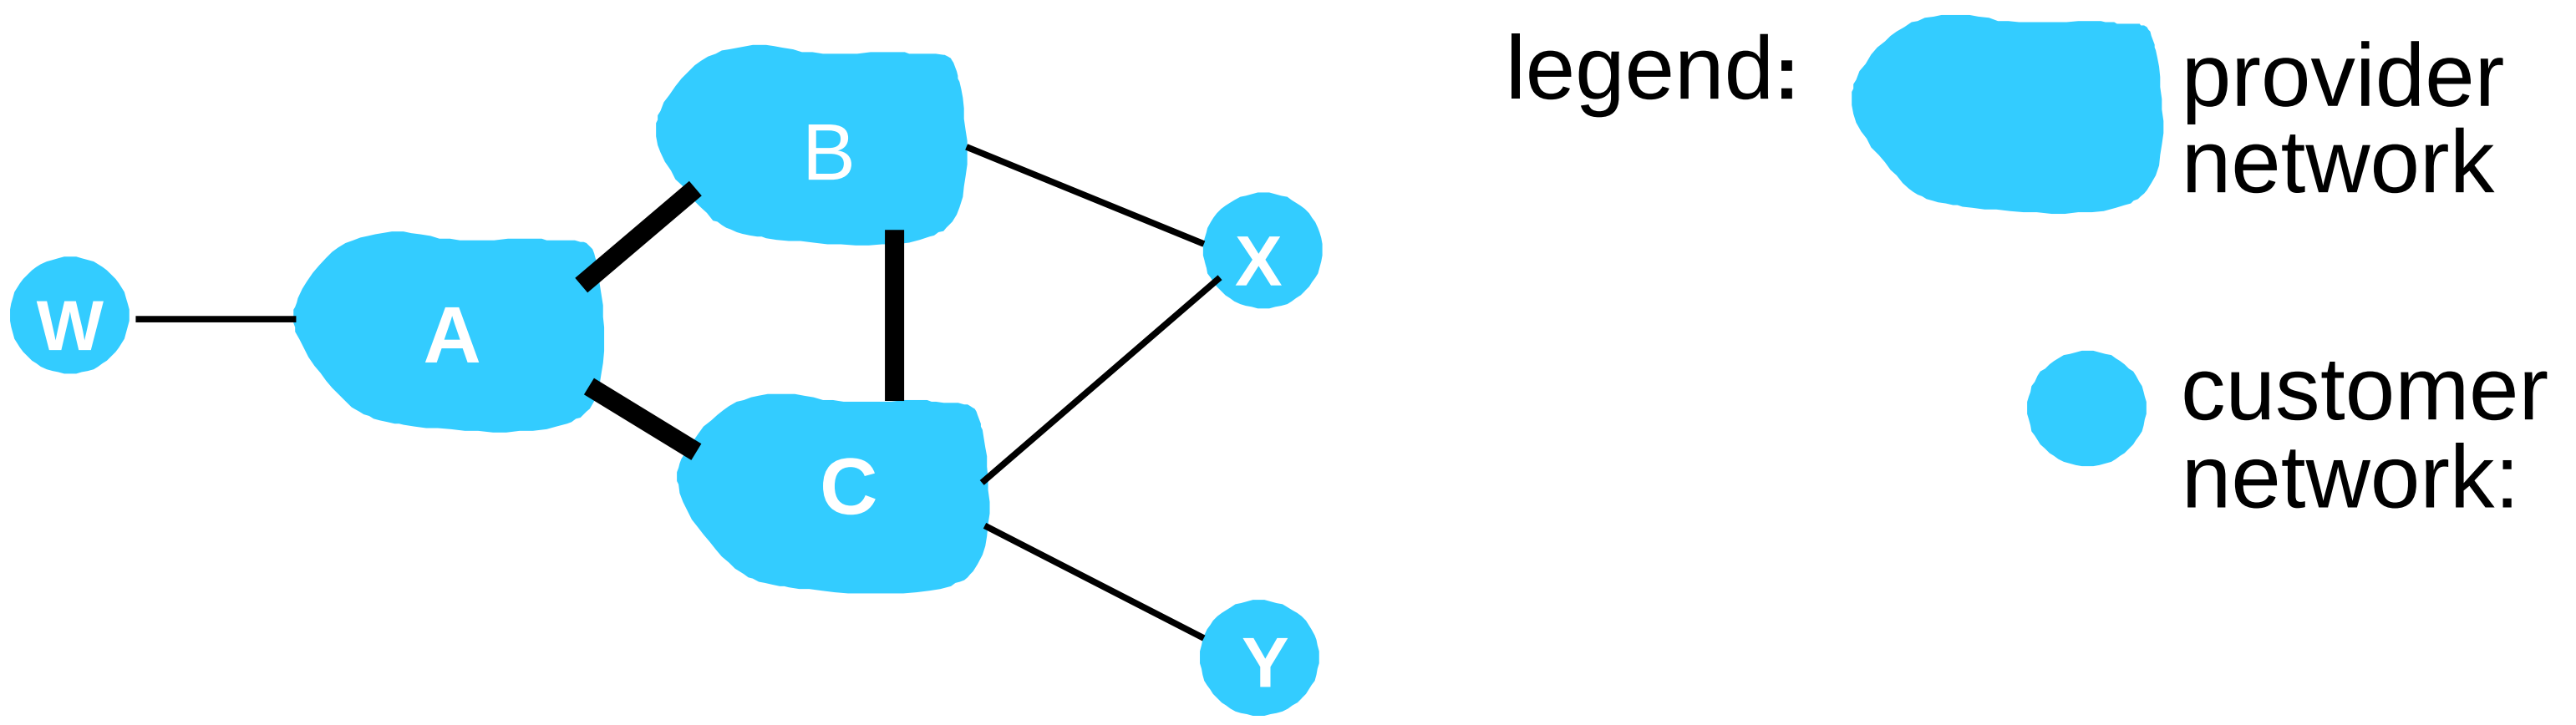

- A,B,C are *provider networks*
- X,W,Y are customer (of provider networks)
- X is *dual-homed:* attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

BGP routing policy (2)

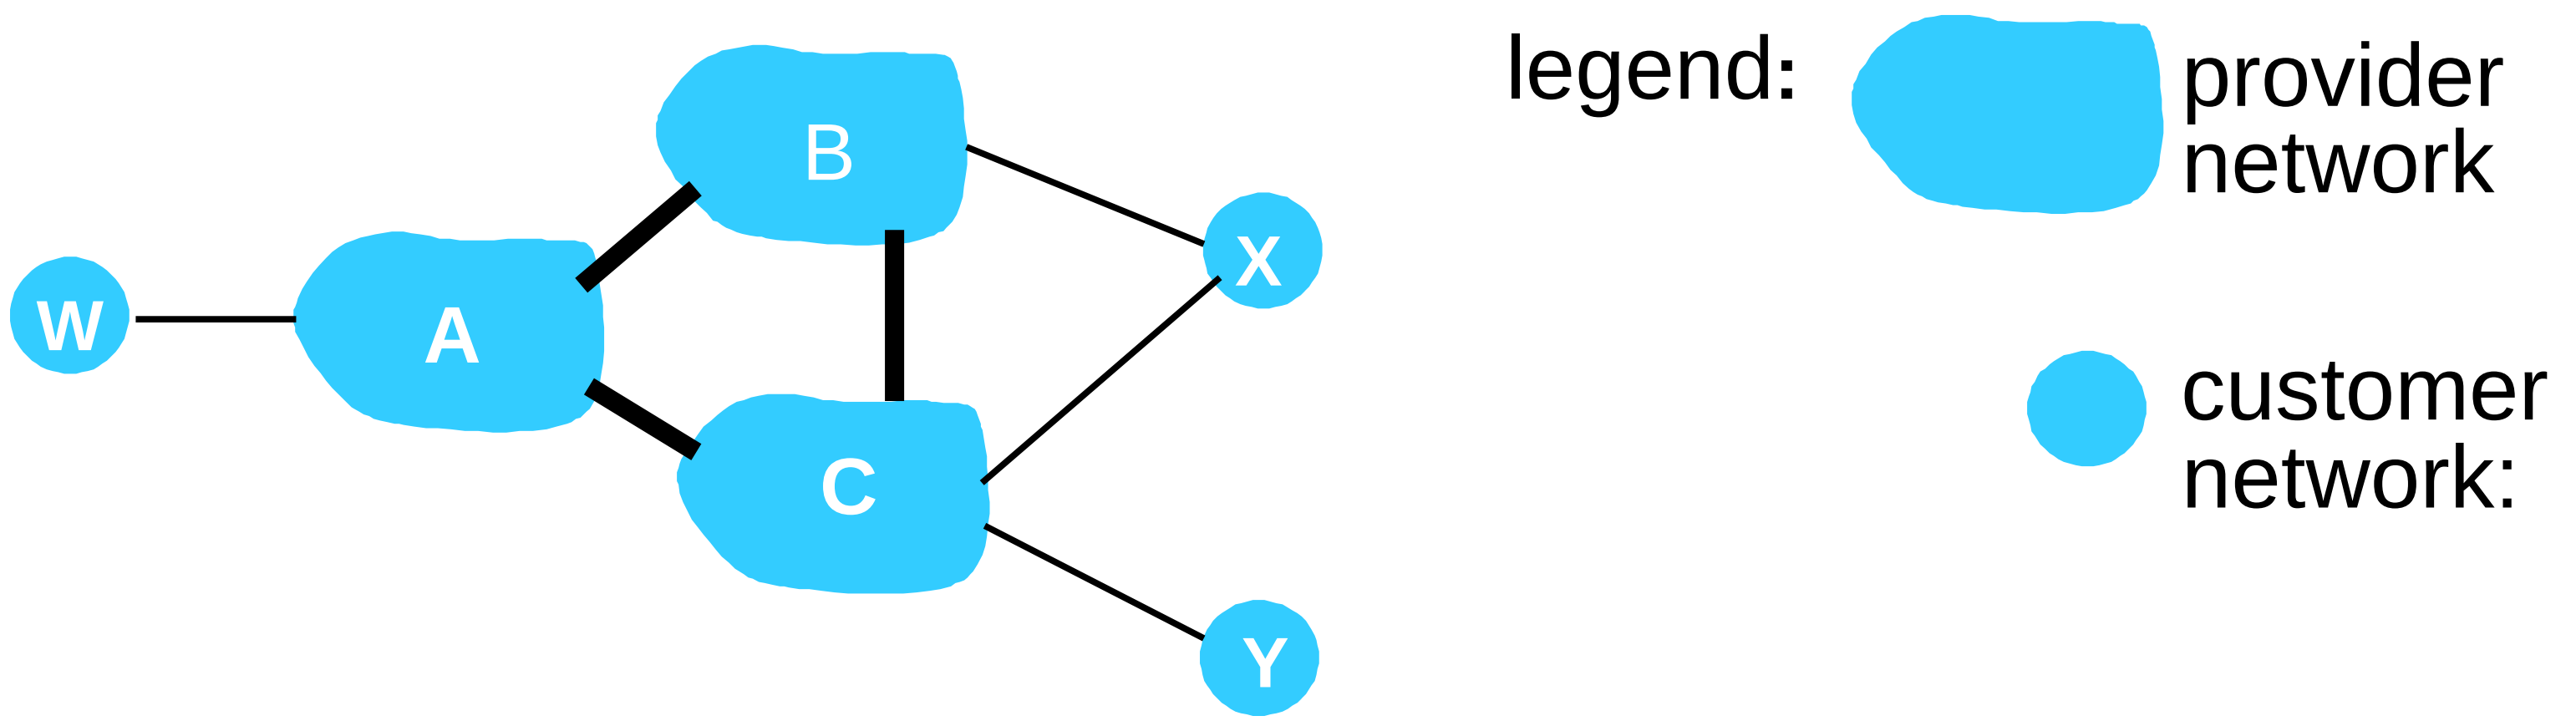

- A advertises path AW to B
- B advertises path BAW to X
- Should B advertise path BAW to C?
  - No way! B gets no "revenue" for routing CBAW since neither W nor C are B's customers
  - B wants to force C to route to w via A
  - B wants to route *only* to/from its customers!

Why different Intra-, Inter-AS routing ?

policy:

- inter-AS: admin wants control over how its traffic routed, who routes through its net.
- intra-AS: single admin, so no policy decisions needed

scale:

- hierarchical routing saves table size, reduced update traffic

performance:

- intra-AS: can focus on performance
- inter-AS: policy may dominate over performance

Chapter 4: outline

Broadcast routing

- deliver packets from source to all other nodes
- source duplication is inefficient:

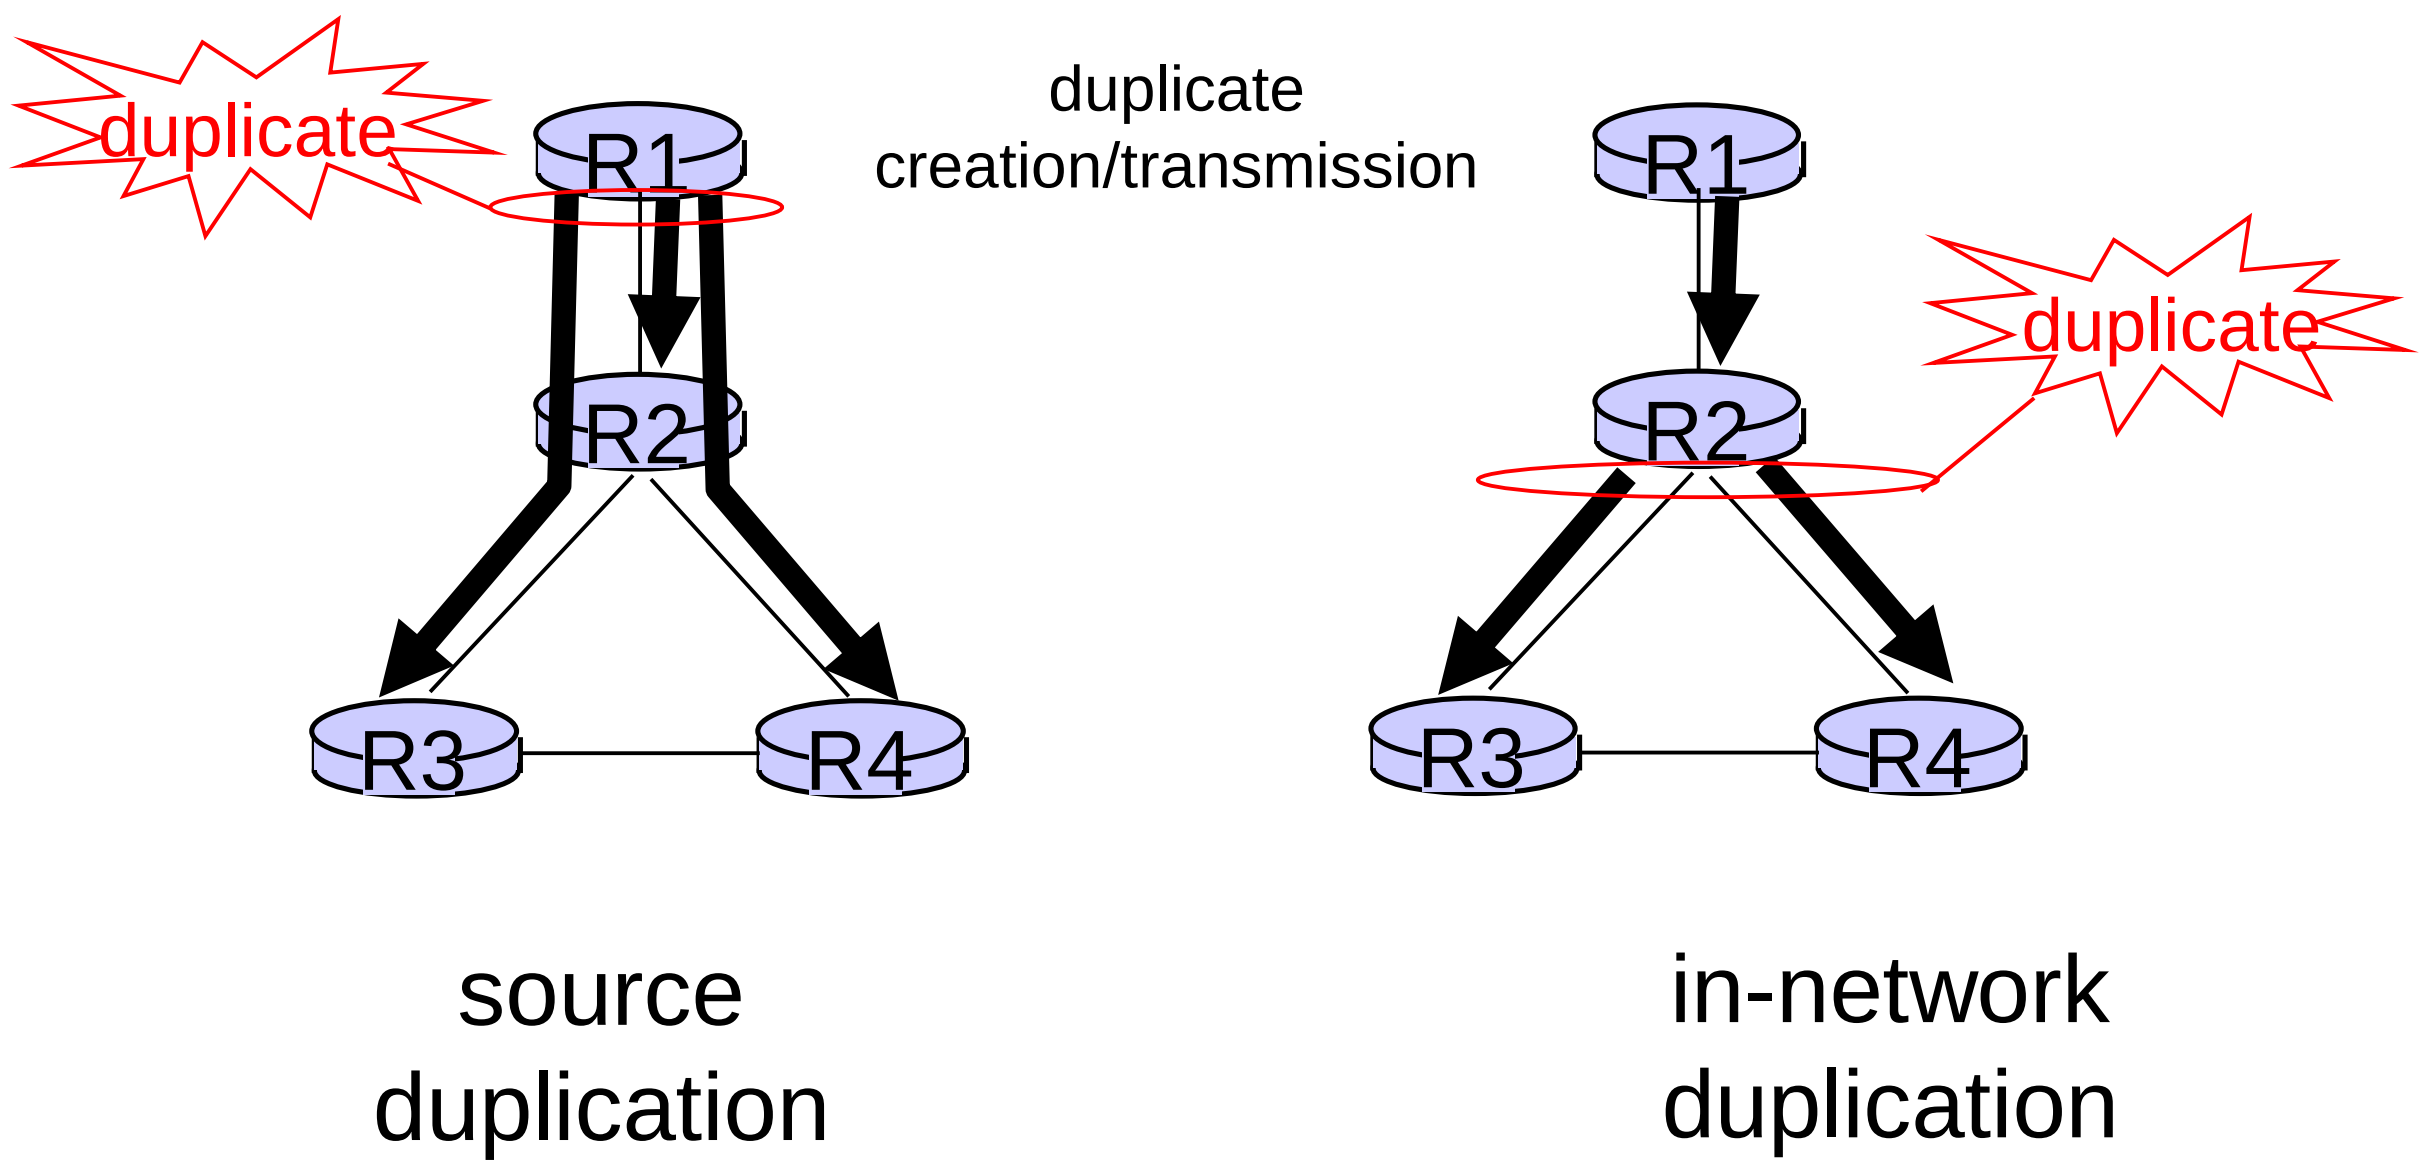

- source duplication: how does source determine recipient addresses?

In-network duplication

- *flooding:* when node receives broadcast packet, sends copy to all neighbors
  - problems: cycles & broadcast storm
- *controlled flooding:* node only broadcasts pkt if it hasn't broadcast same packet before
  - node keeps track of packet ids already broadacsted
  - or reverse path forwarding (RPF): only forward packet if it arrived on shortest path between node and source
- *spanning tree:*
  - no redundant packets received by any node

Spanning tree

- first construct a spanning tree
- nodes then forward/make copies only along spanning tree

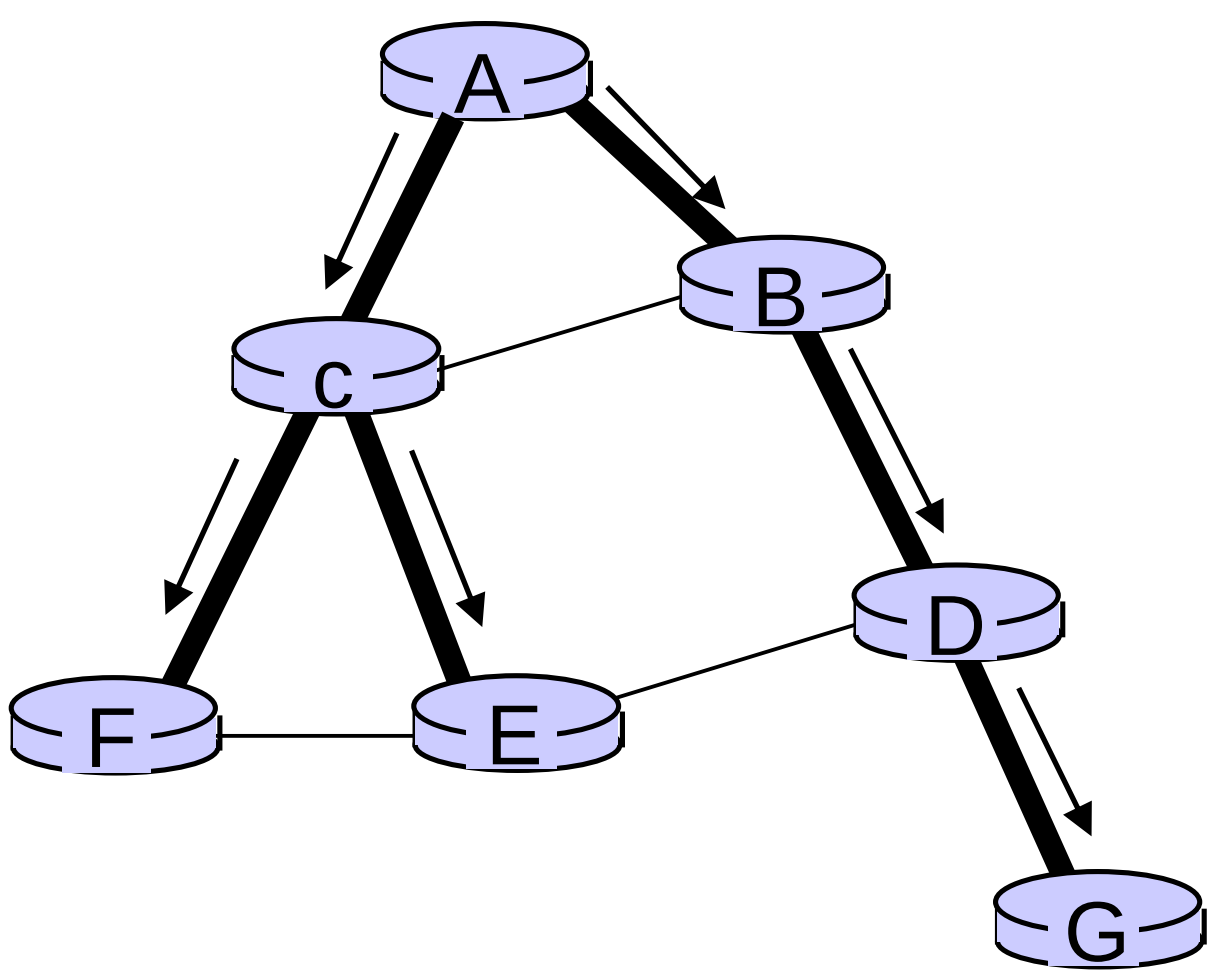

(a) broadcast initiated at A

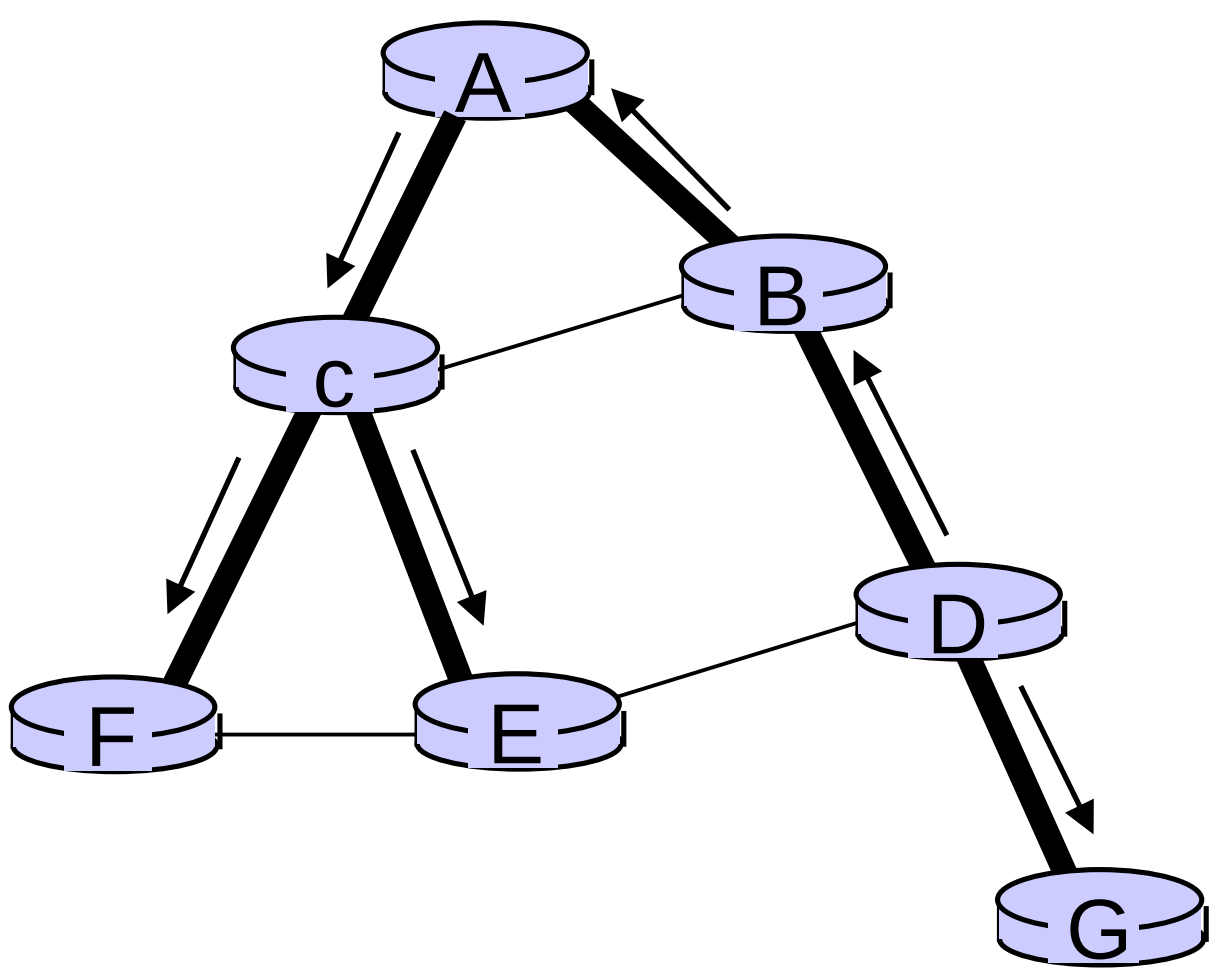

(b) broadcast initiated at D

Spanning tree: creation

- center node
- each node sends unicast join message to center node
  - message forwarded until it arrives at a node already belonging to spanning tree

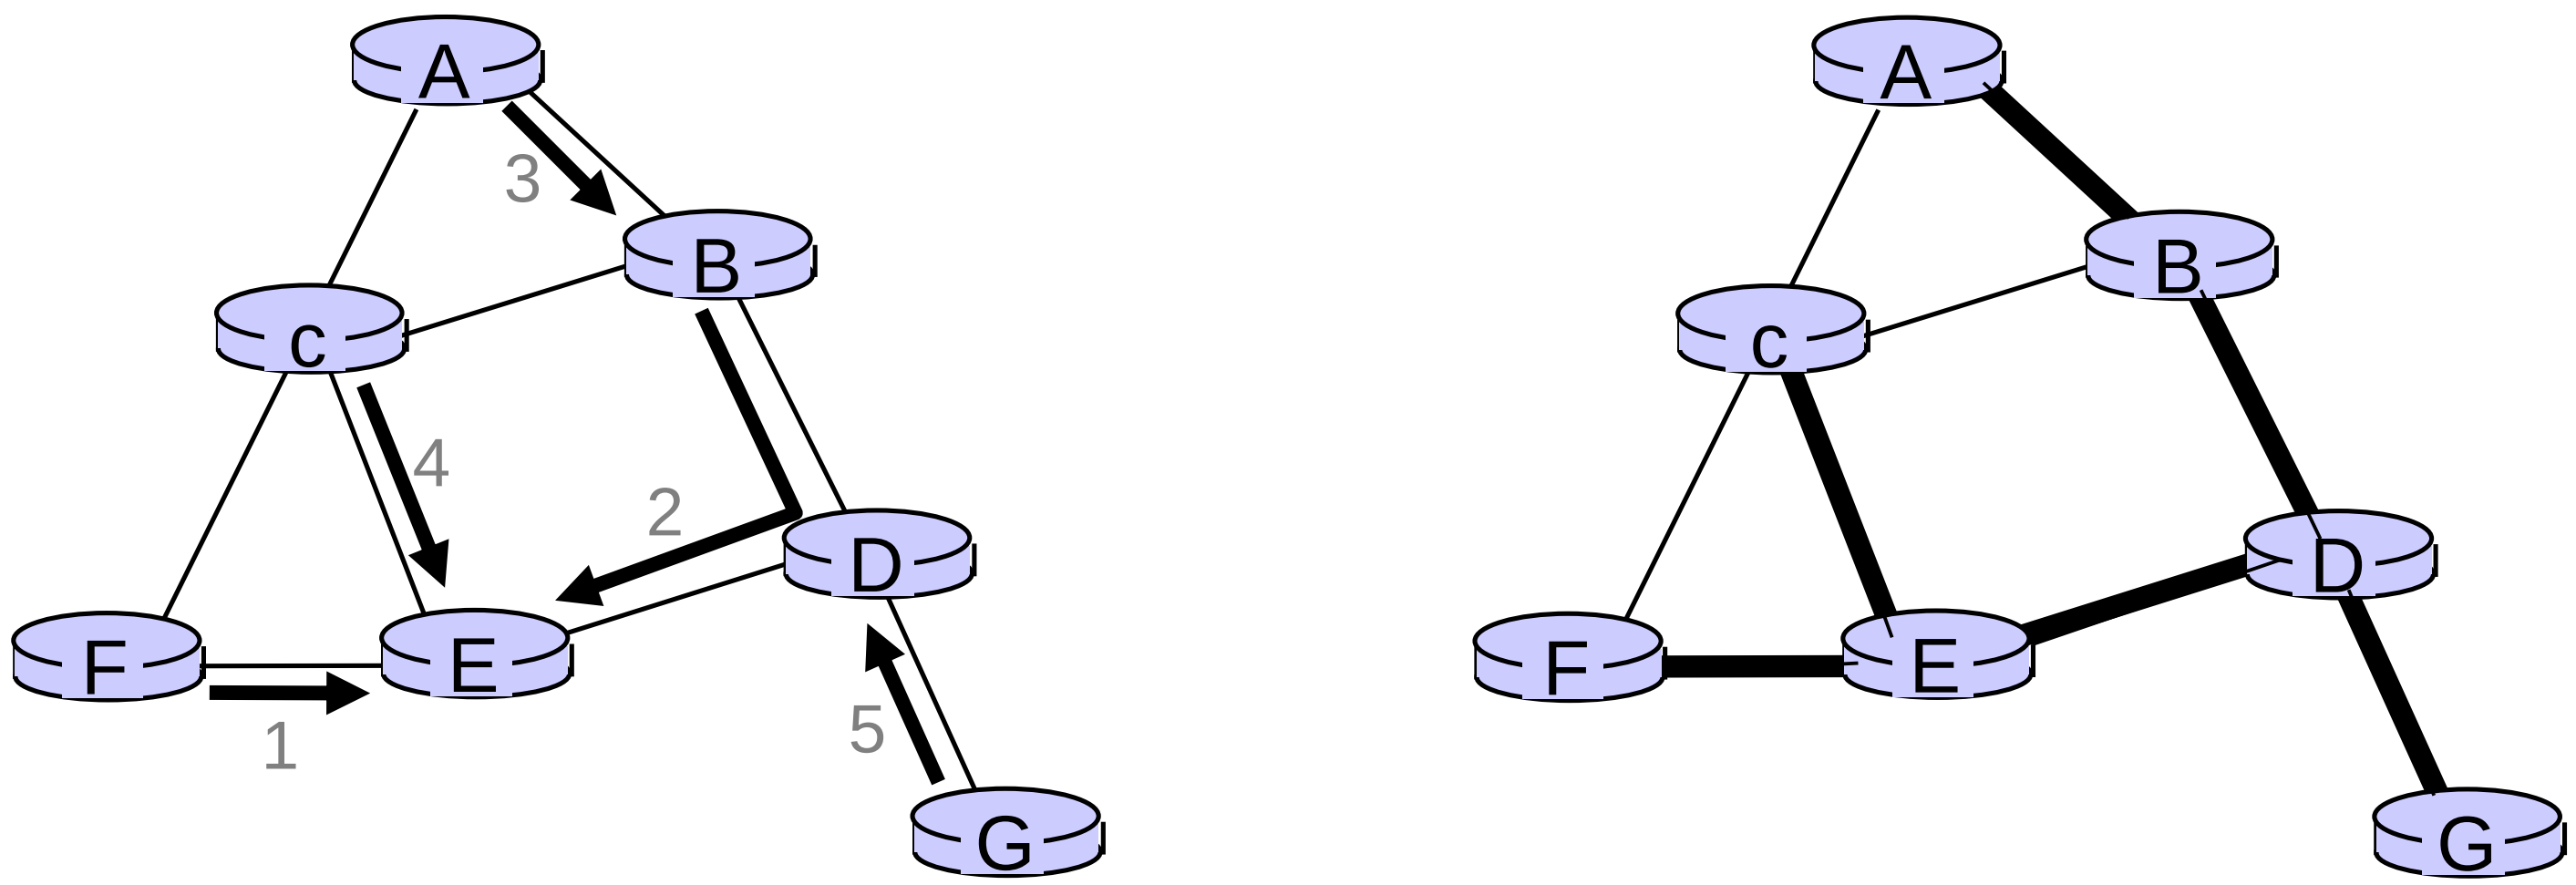

(a) stepwise construction of spanning tree (center: E)

(b) constructed spanning tree

Multicast routing: problem statement

goal: find a tree (or trees) connecting routers having local mcast group members

- *tree:* not all paths between routers used
- *shared-tree:* same tree used by all group members
- *source-based:* different tree from each sender to rcvrs

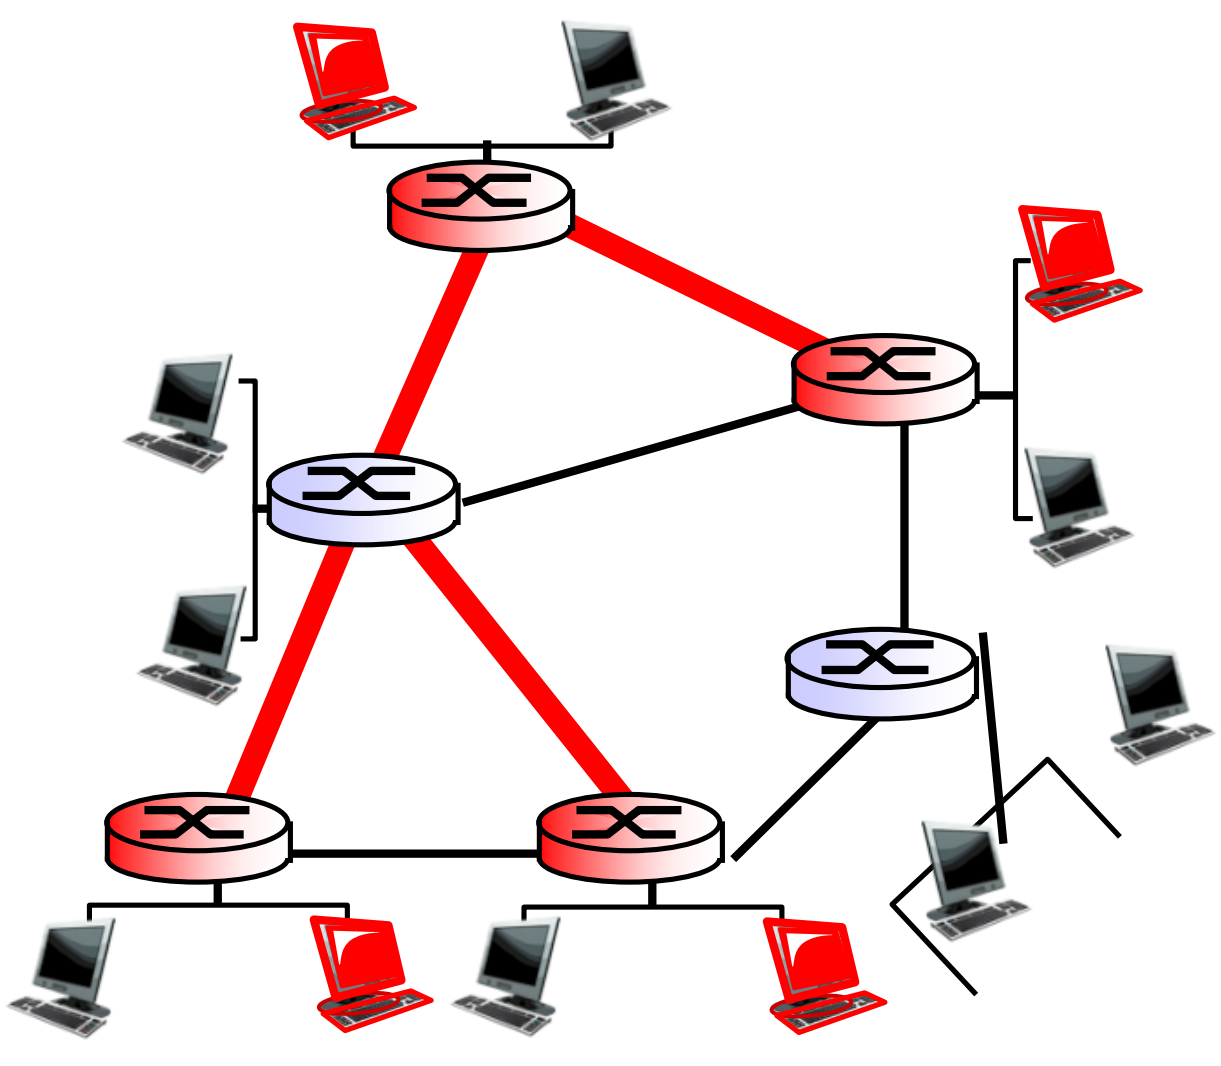

shared tree

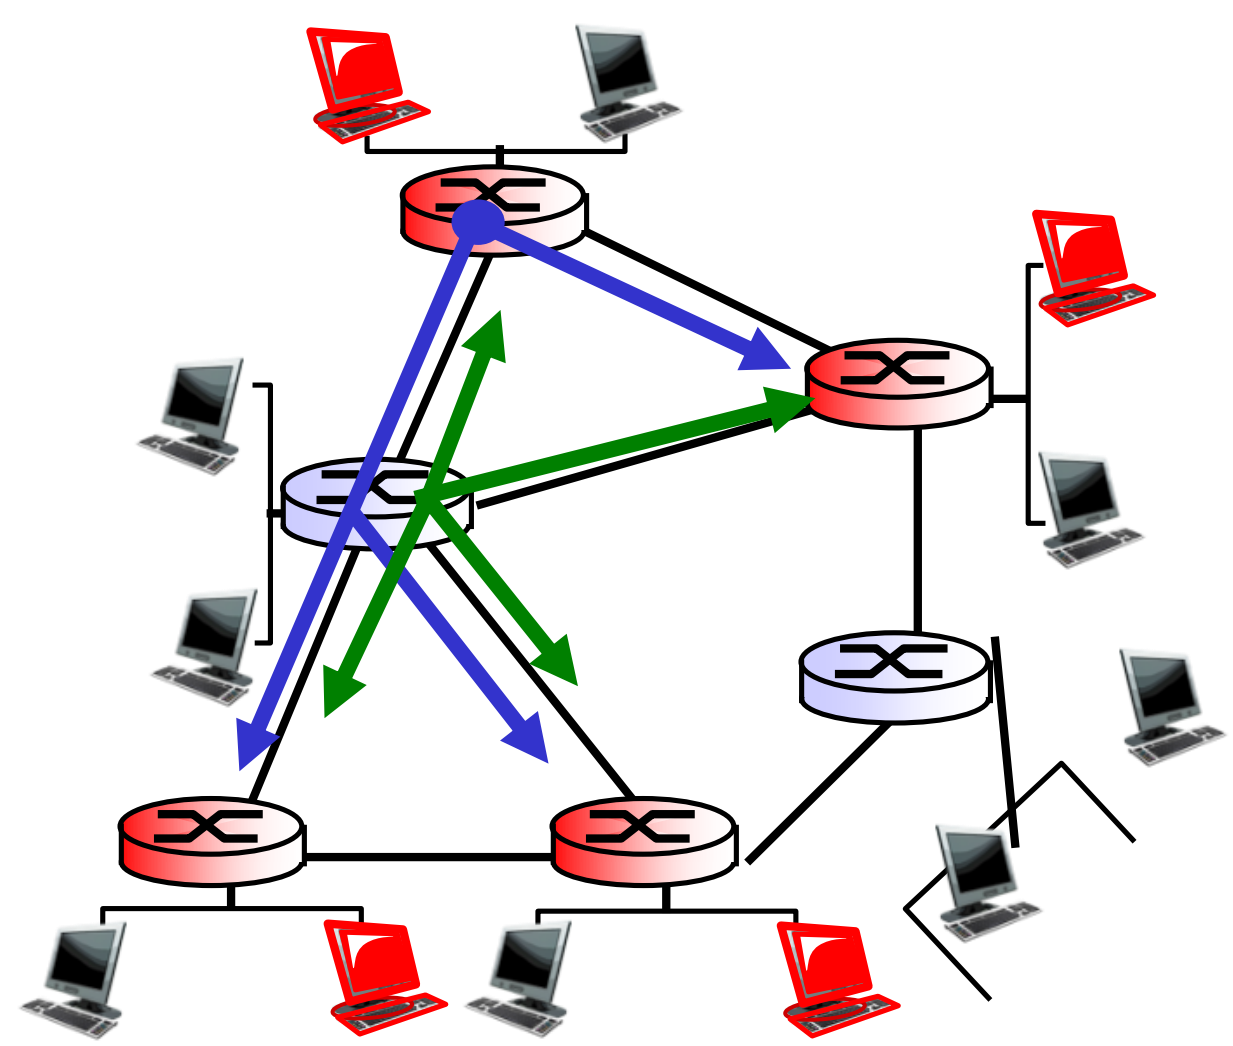

source-based trees

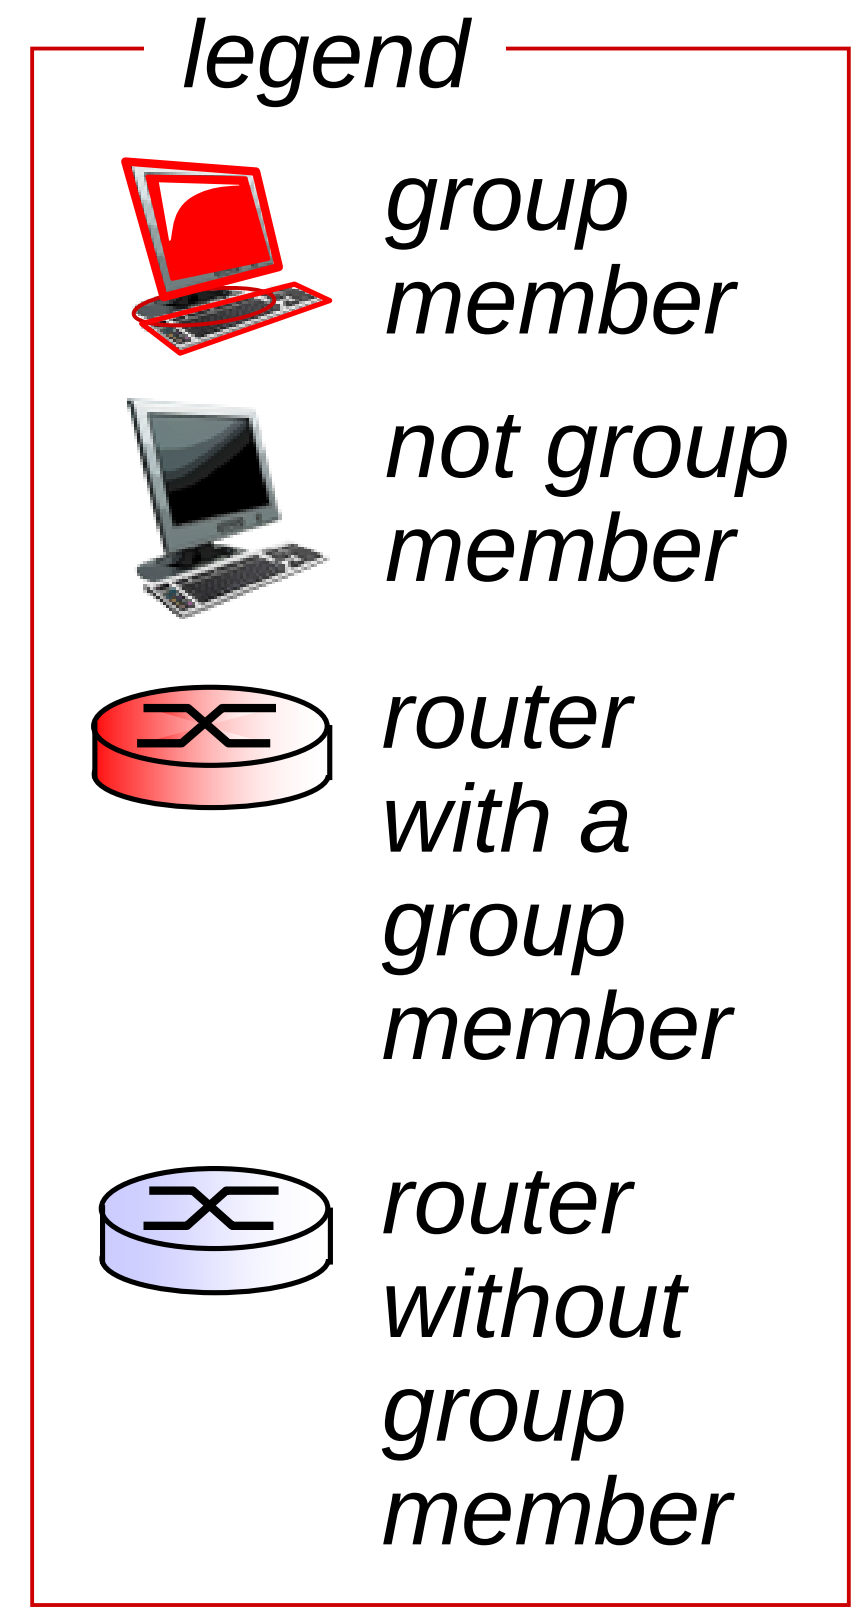

Approaches for building mcast trees

approaches:

- *source-based tree:* one tree per source
  - shortest path trees
  - reverse path forwarding
- *group-shared tree:* group uses one tree
  - minimal spanning (Steiner)
  - center-based trees

Shortest path tree

- mcast forwarding tree: tree of shortest path routes from source to all receivers
  - Dijkstra's algorithm

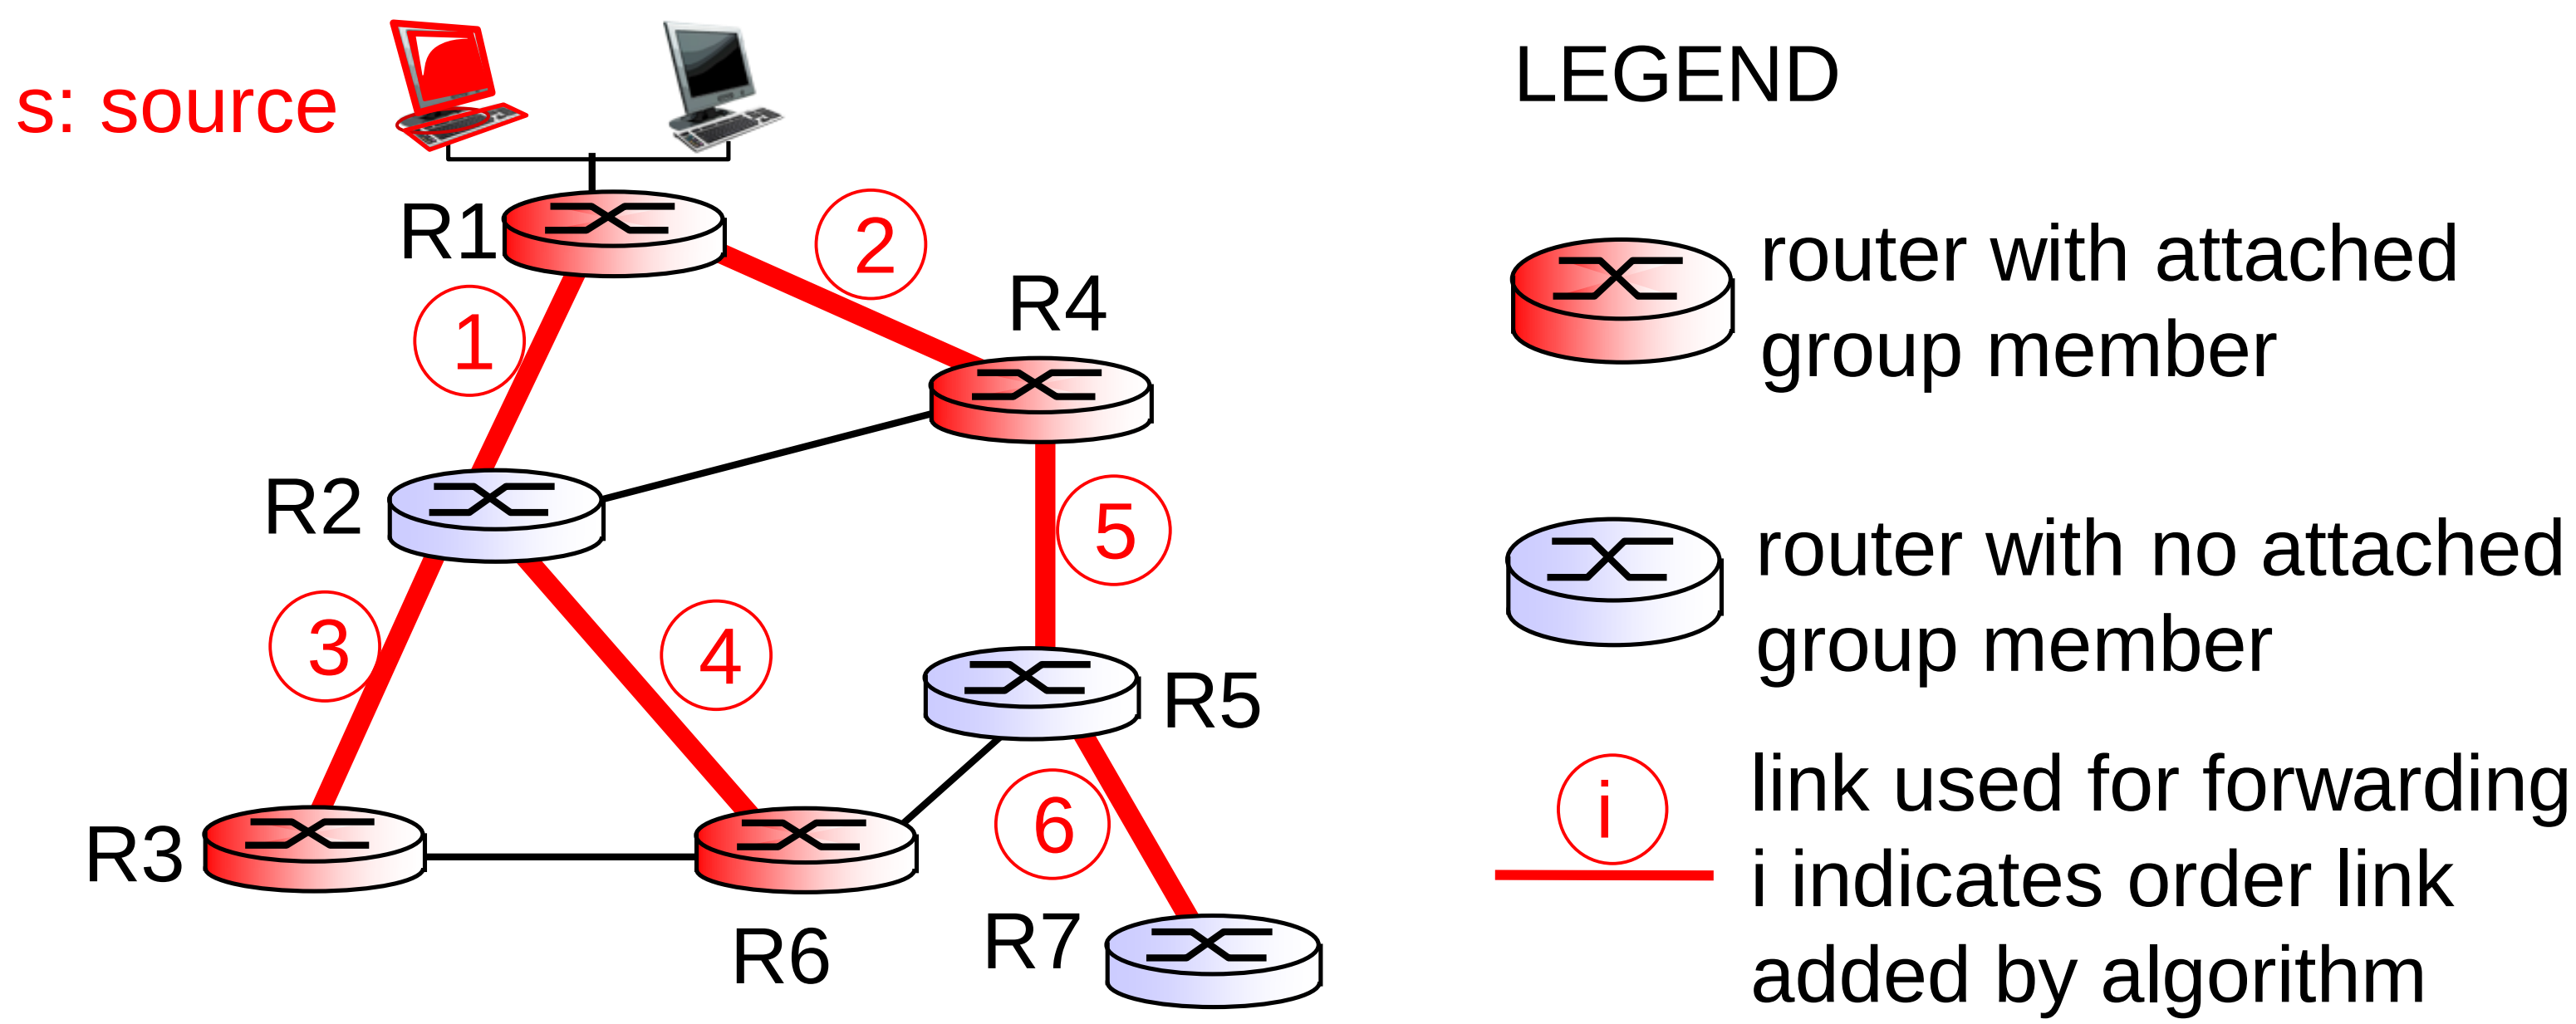

Reverse path forwarding

- rely on router's knowledge of unicast shortest path from it to sender
- each router has simple forwarding behavior:

if (mcast datagram received on incoming link on shortest path back to center)
then flood datagram onto all outgoing links
else ignore datagram

Reverse path forwarding: example

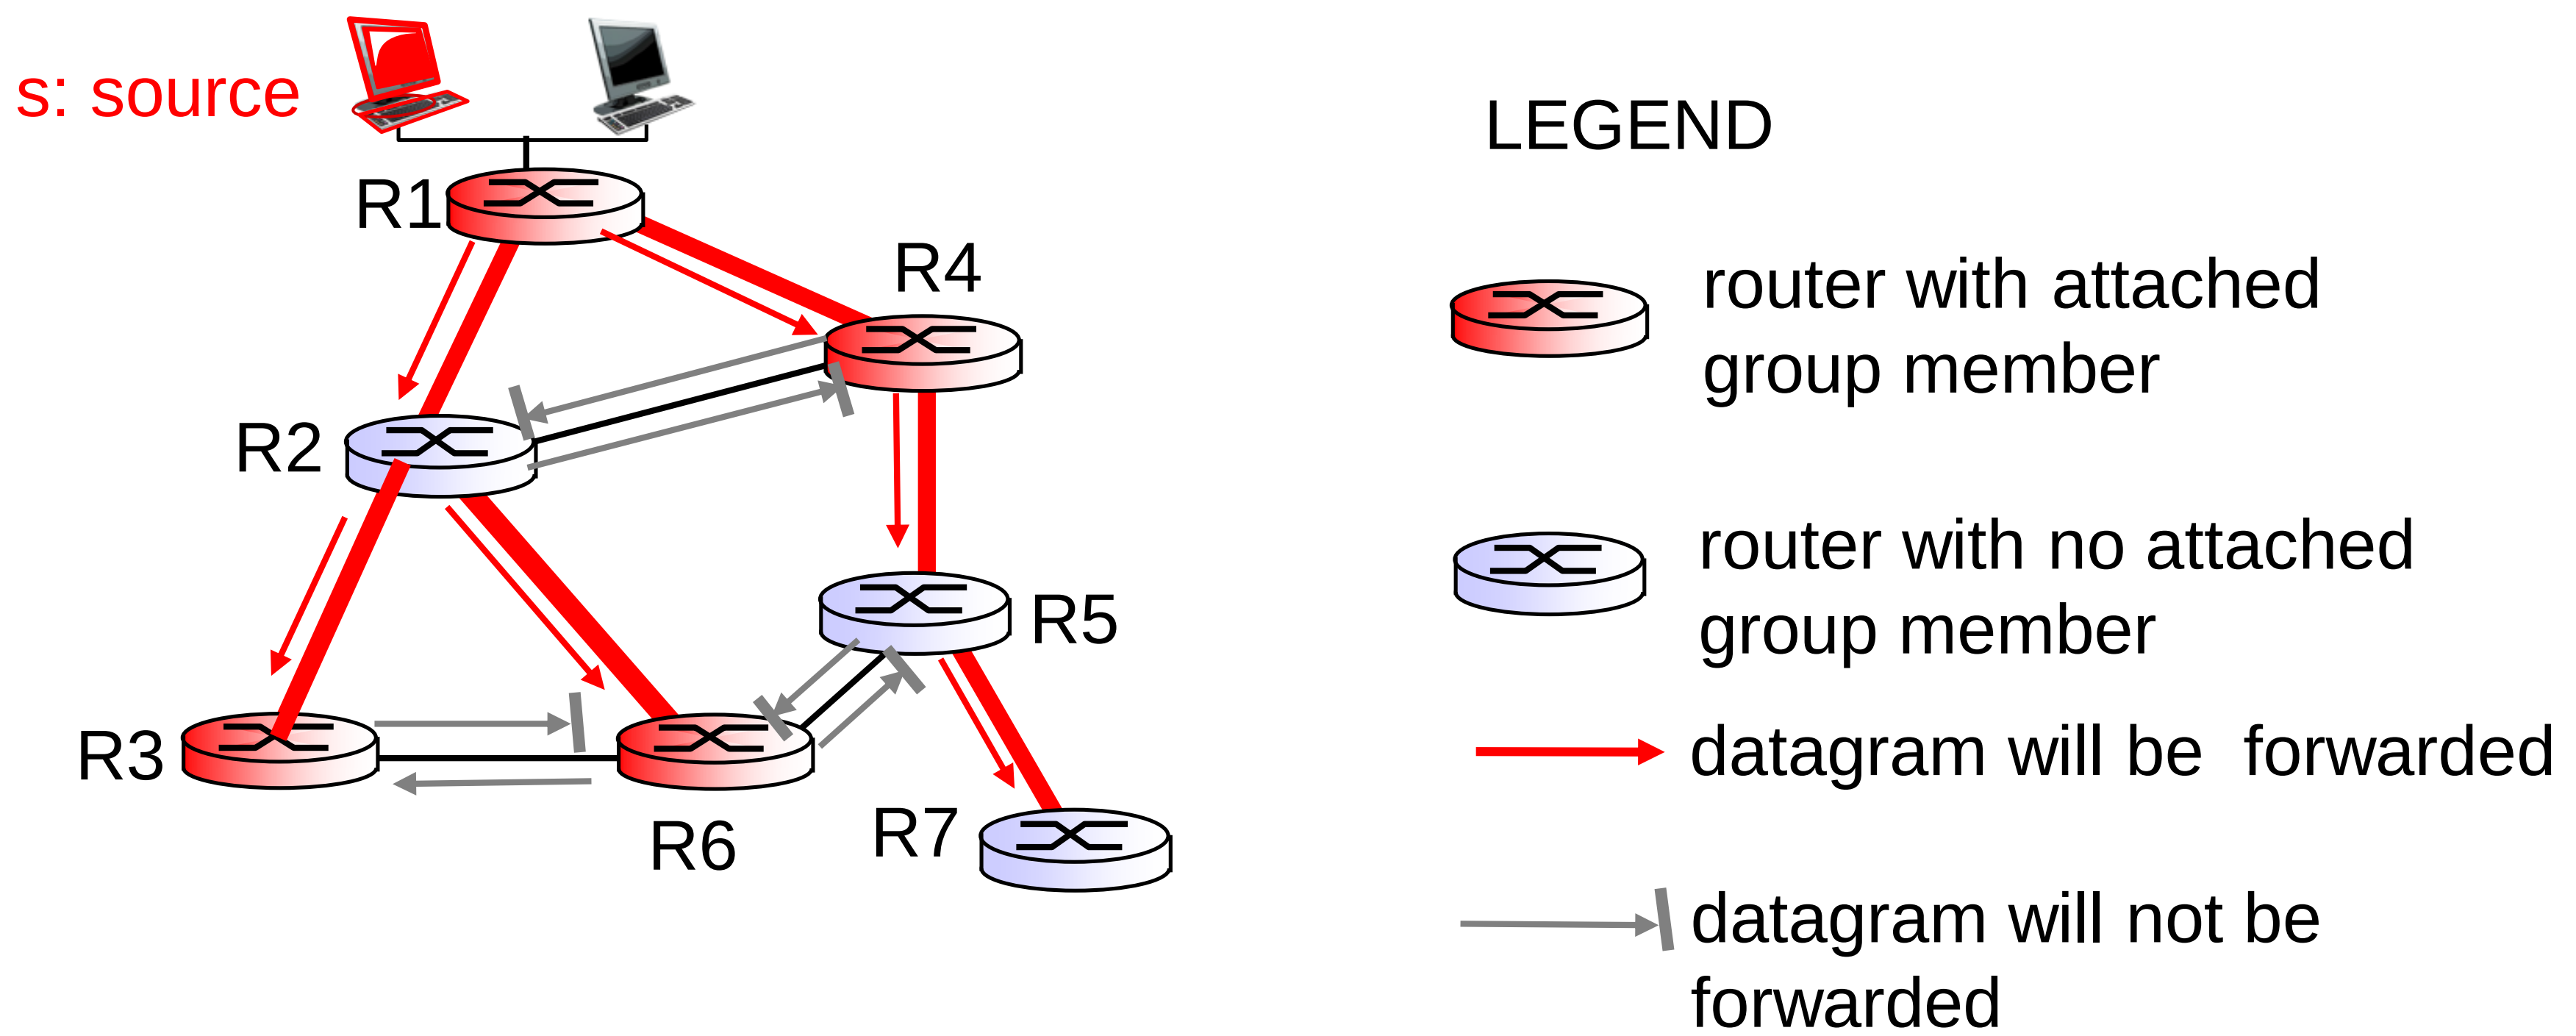

- result is a source-specific *reverse* SPT
  - may be a bad choice with asymmetric links

Reverse path forwarding: pruning

- forwarding tree contains subtrees with no mcast group members
  - no need to forward datagrams down subtree
  - "prune" msgs sent upstream by router with no downstream group members

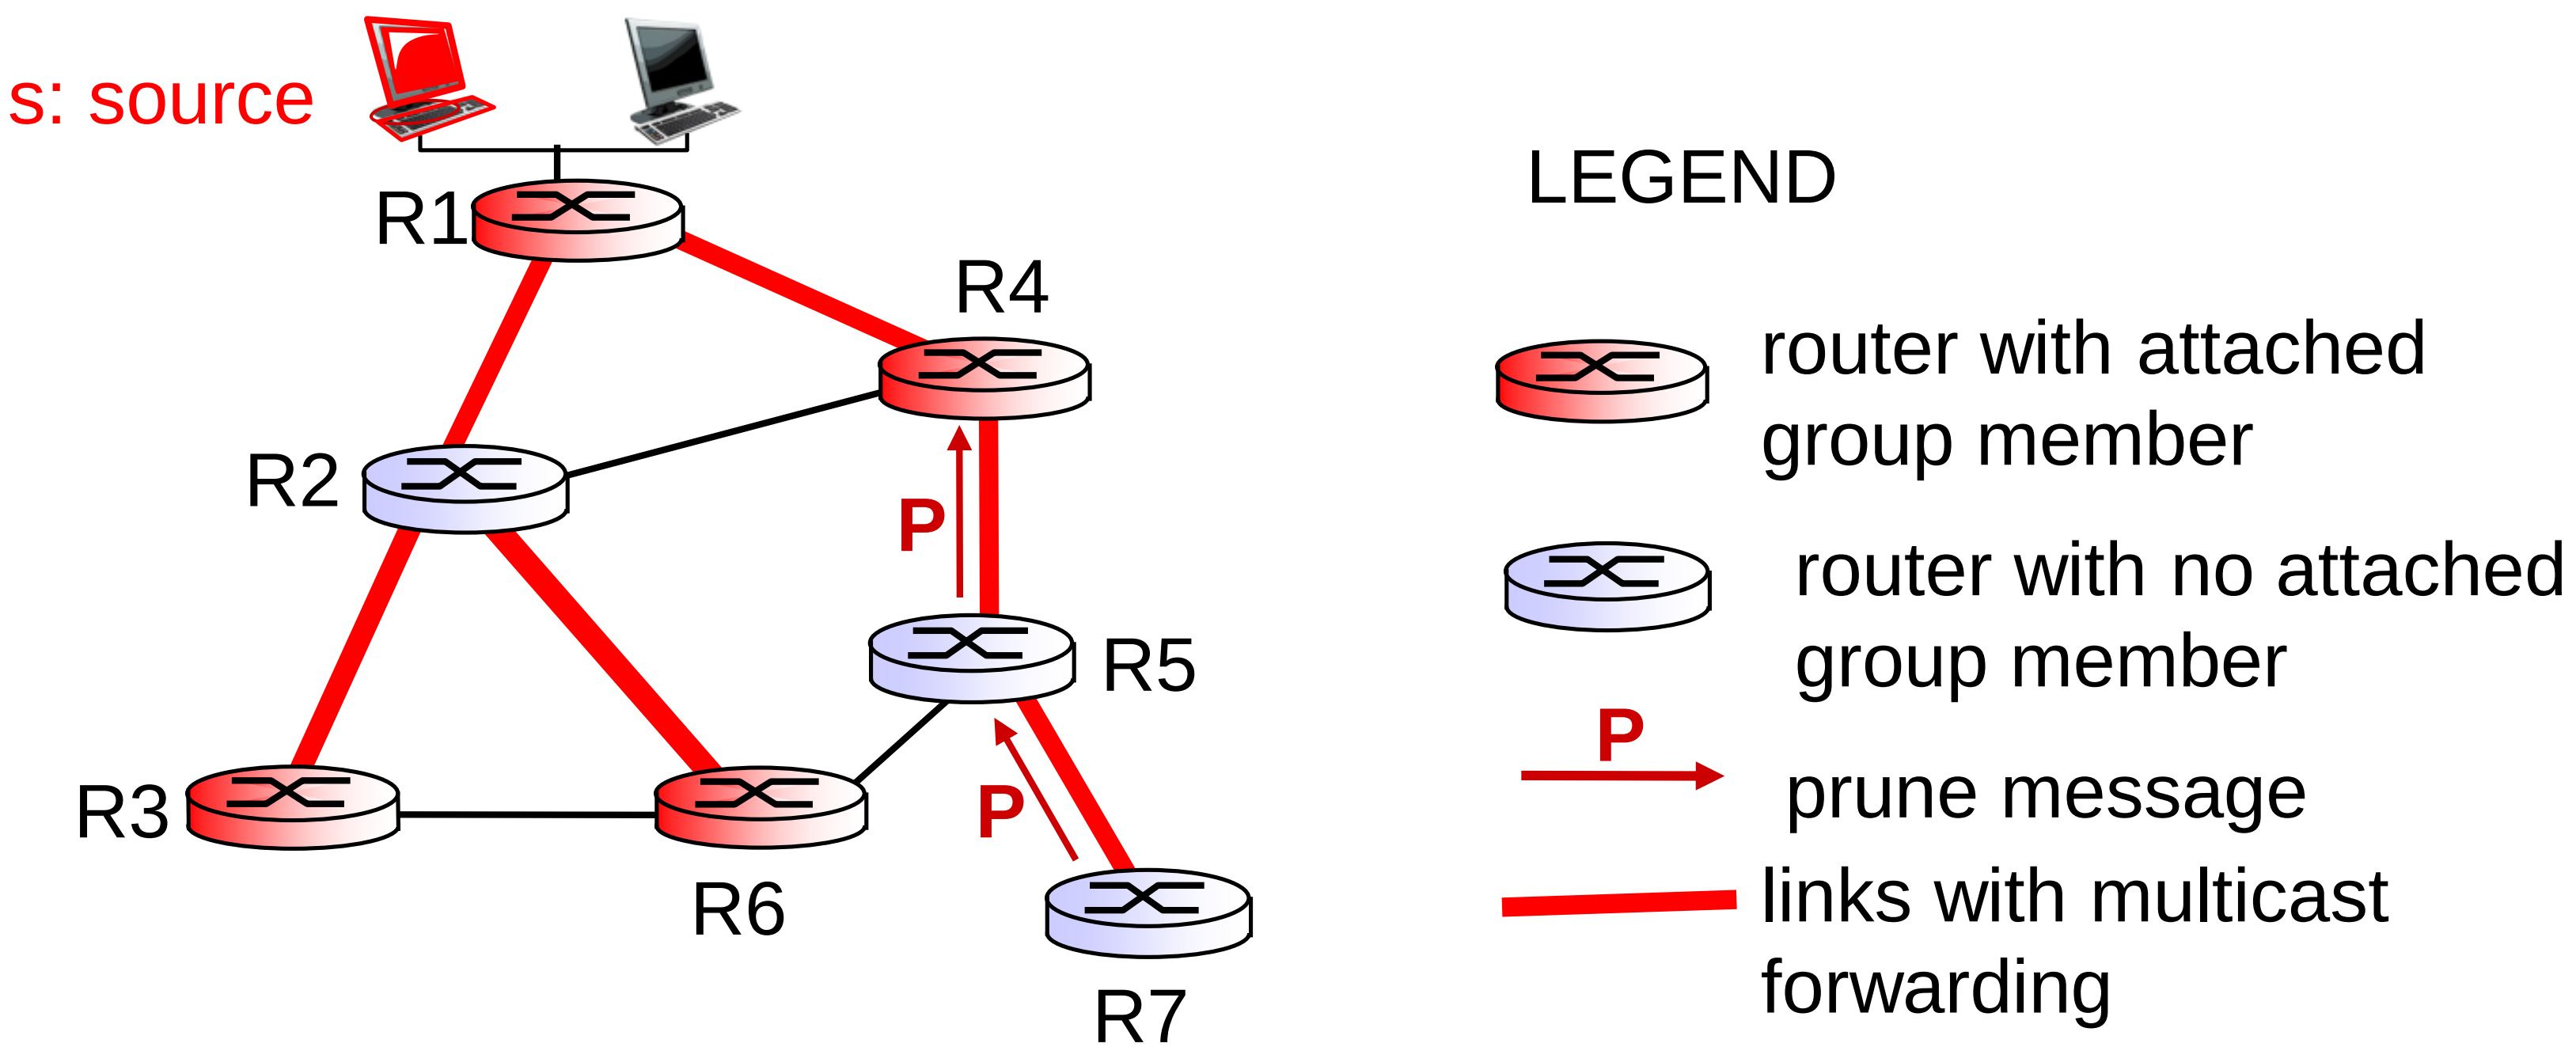

Shared-tree: steiner tree

- *steiner tree:* minimum cost tree connecting all routers with attached group members
- problem is NP-complete
- excellent heuristics exists
- not used in practice:
  - computational complexity
  - information about entire network needed
  - monolithic: rerun whenever a router needs to join/leave

Center-based trees

- single delivery tree shared by all
- one router identified as "*center*" of tree
- to join:
  - edge router sends unicast *join-msg* addressed to center router
  - *join-msg* "processed" by intermediate routers and forwarded towards center
  - *join-msg* either hits existing tree branch for this center, or arrives at center
  - path taken by *join-msg* becomes new branch of tree for this router

Center-based trees: example

suppose R6 chosen as center:

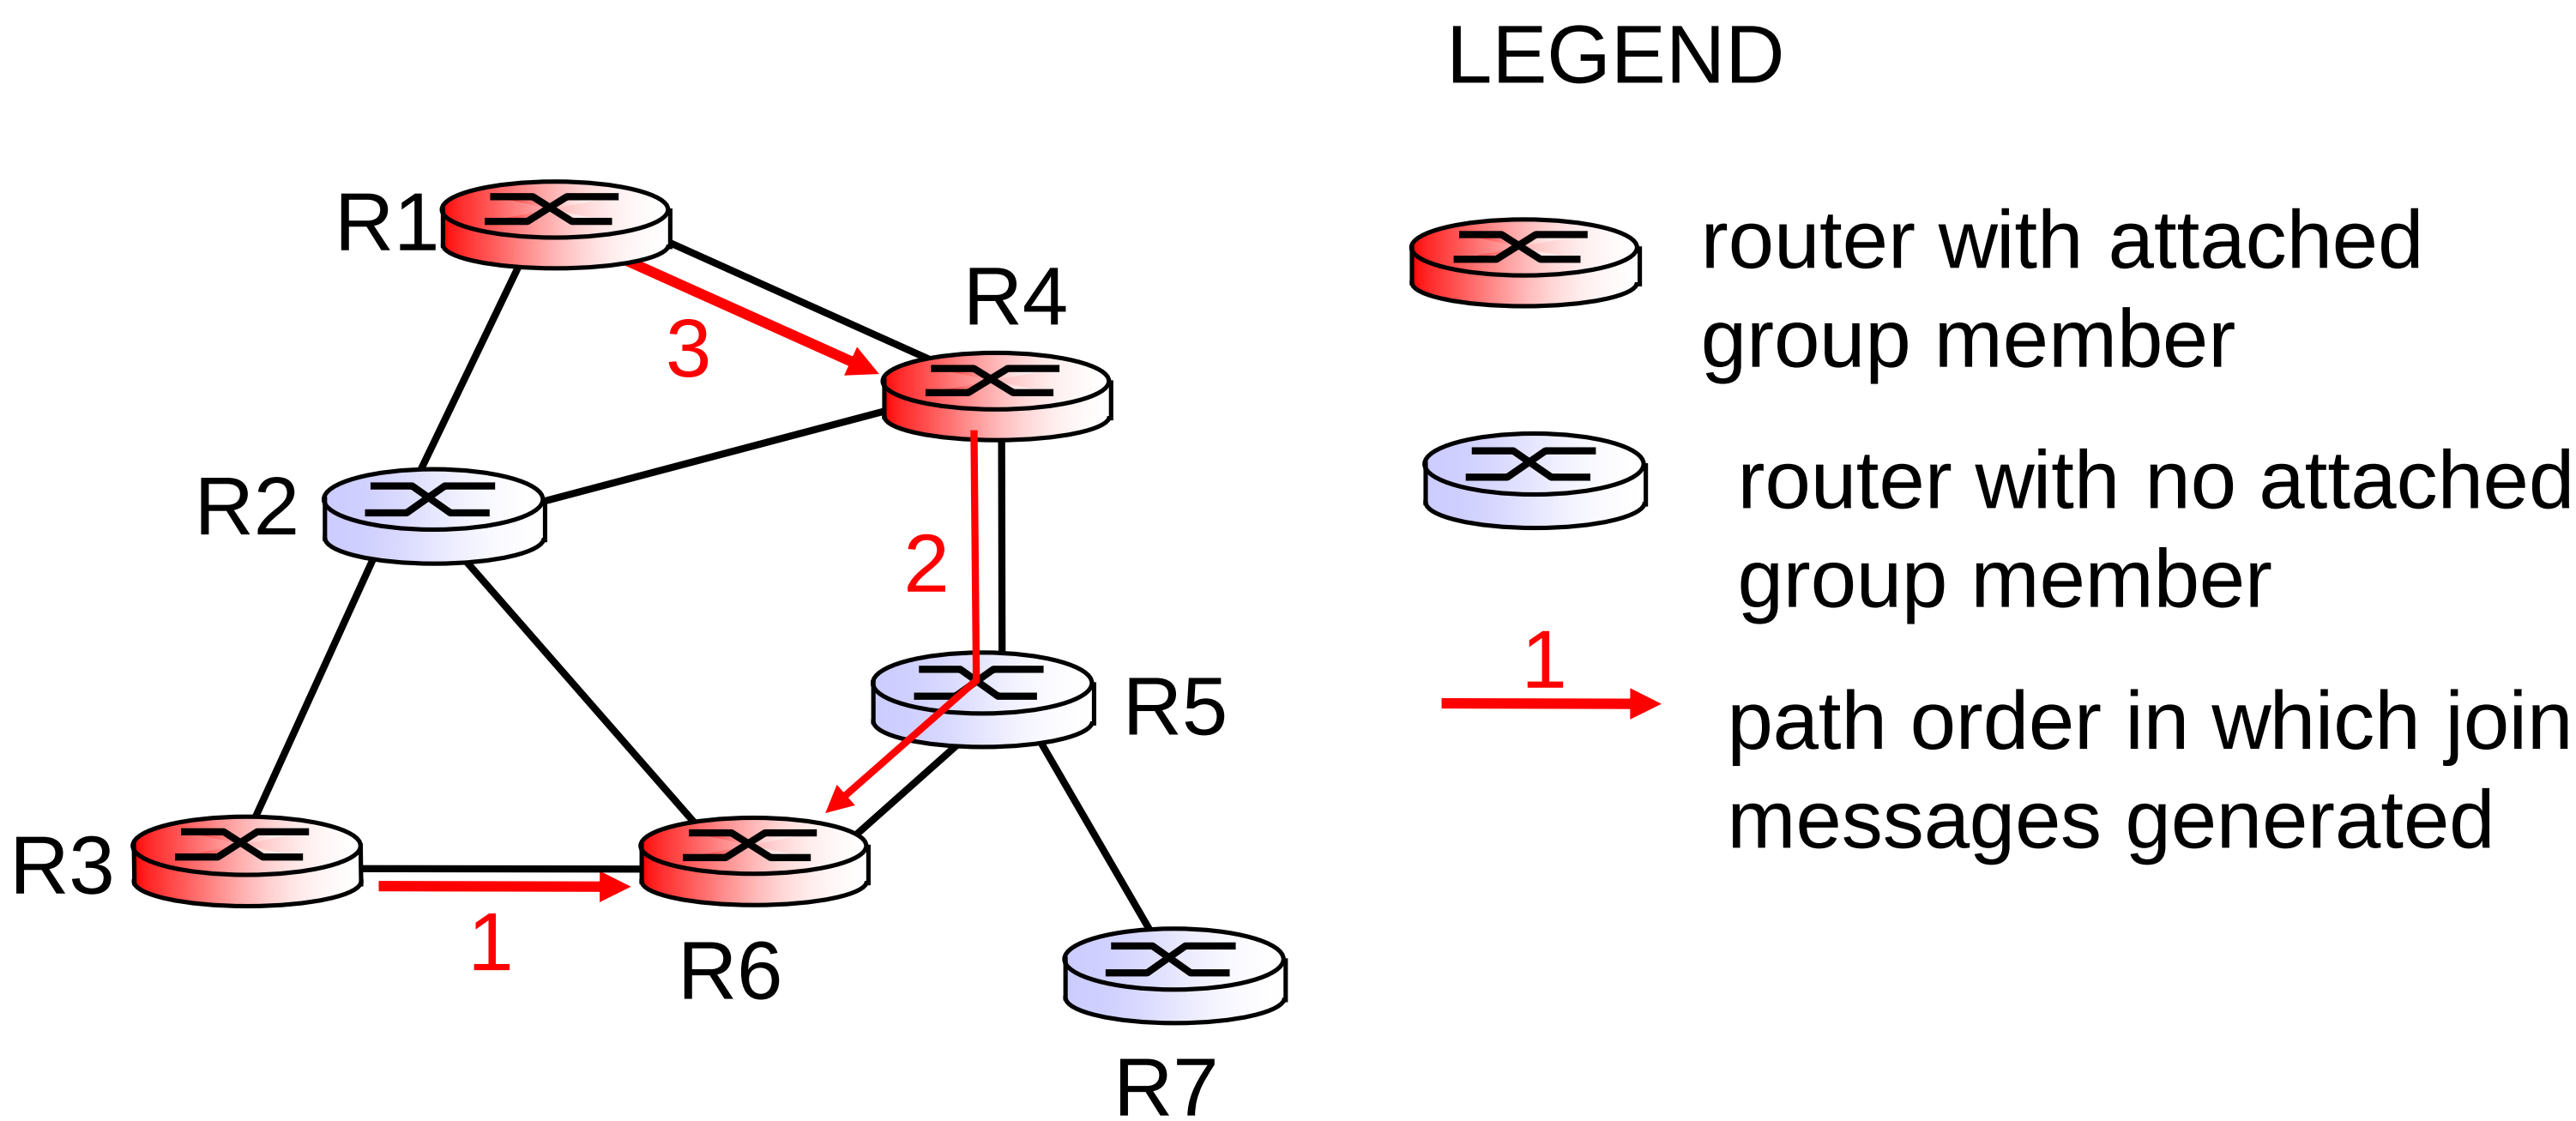

Internet Multicasting Routing: DVMRP

- DVMRP: distance vector multicast routing protocol, RFC1075
- *flood and prune:* reverse path forwarding, source-based tree
  - RPF tree based on DVMRP's own routing tables constructed by communicating DVMRP routers
  - no assumptions about underlying unicast
  - initial datagram to mcast group flooded everywhere via RPF
  - routers not wanting group: send upstream prune msgs

DVMRP: continued…

- *soft state:* DVMRP router periodically (1 min.) "forgets" branches are pruned:
  - mcast data again flows down unpruned branch
  - downstream router: reprune or else continue to receive data
- routers can quickly regraft to tree
  - following IGMP join at leaf
- odds and ends
  - commonly implemented in commercial router

Tunneling

Q: how to connect "islands" of multicast routers in a "sea" of unicast routers?

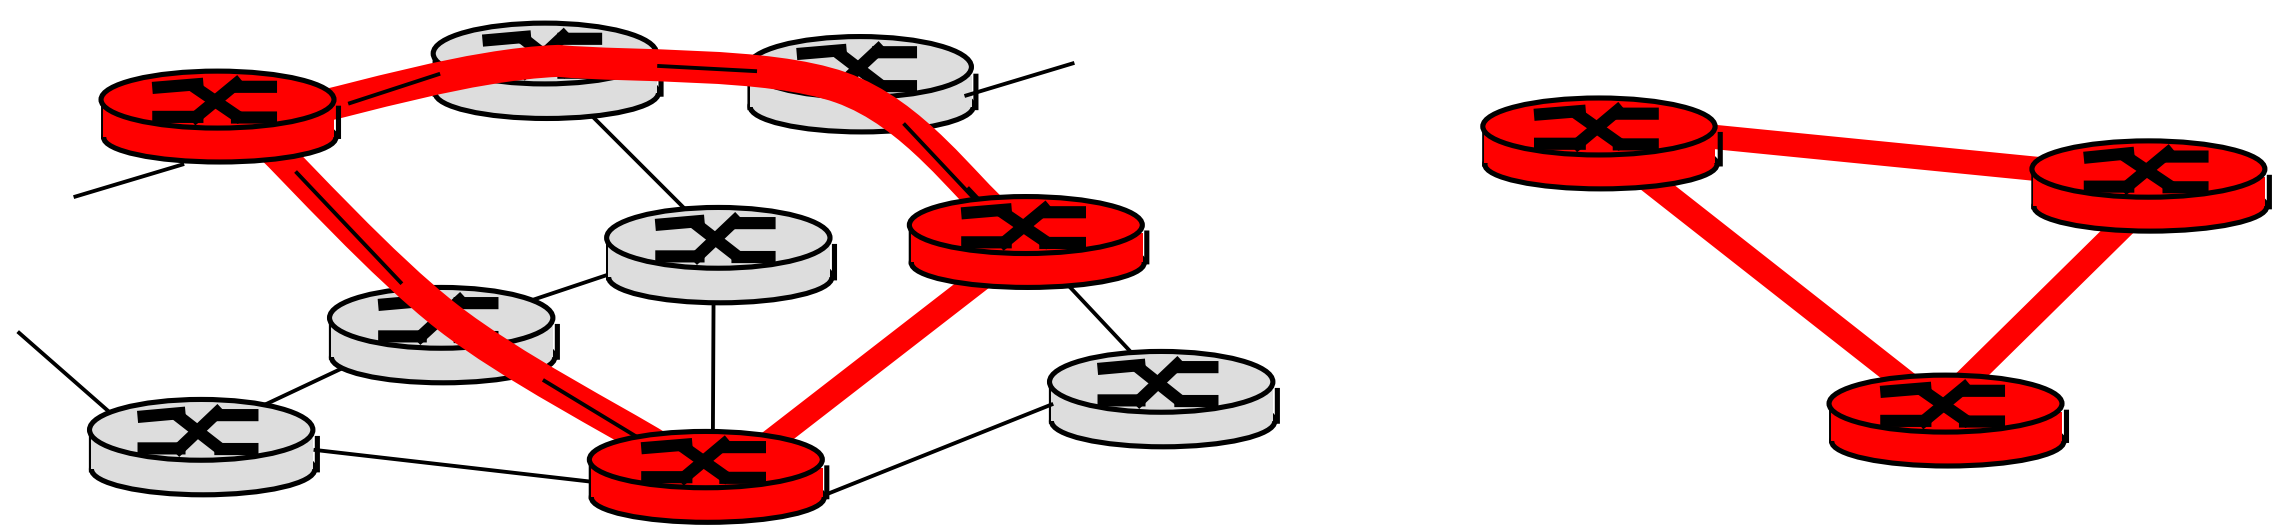

physical topology

logical topology

- mcast datagram encapsulated inside "normal" (non-multicast-addressed) datagram
- normal IP datagram sent thru "tunnel" via regular IP unicast to receiving mcast router (recall IPv6 inside IPv4 tunneling)
- receiving mcast router unencapsulates to get mcast datagram

PIM: Protocol Independent Multicast

- not dependent on any specific underlying unicast routing algorithm (works with all)
- two different multicast distribution scenarios :

dense:

- group members densely packed, in "close" proximity.
- bandwidth more plentiful

sparse:

- # networks with group members small wrt # interconnected networks
- group members "widely dispersed"
- bandwidth not plentiful

Consequences of sparse-dense dichotomy:

dense

- group membership by routers *assumed* until routers explicitly prune
- *data-driven* construction on mcast tree (e.g., RPF)
- bandwidth and non-group-router processing *profligate*

sparse:

- no membership until routers explicitly join
- *receiver- driven* construction of mcast tree (e.g., center-based)
- bandwidth and non-group-router processing *conservative*

PIM- dense mode

flood-and-prune RPF: similar to DVMRP but…

- underlying unicast protocol provides RPF info for incoming datagram
- less complicated (less efficient) downstream flood than DVMRP reduces reliance on underlying routing algorithm
- has protocol mechanism for router to detect it is a leaf-node router

PIM - sparse mode

- center-based approach
- router sends *join* msg to rendezvous point (RP)
  - intermediate routers update state and forward *join*
- after joining via RP, router can switch to source-specific tree
  - increased performance: less concentration, shorter paths

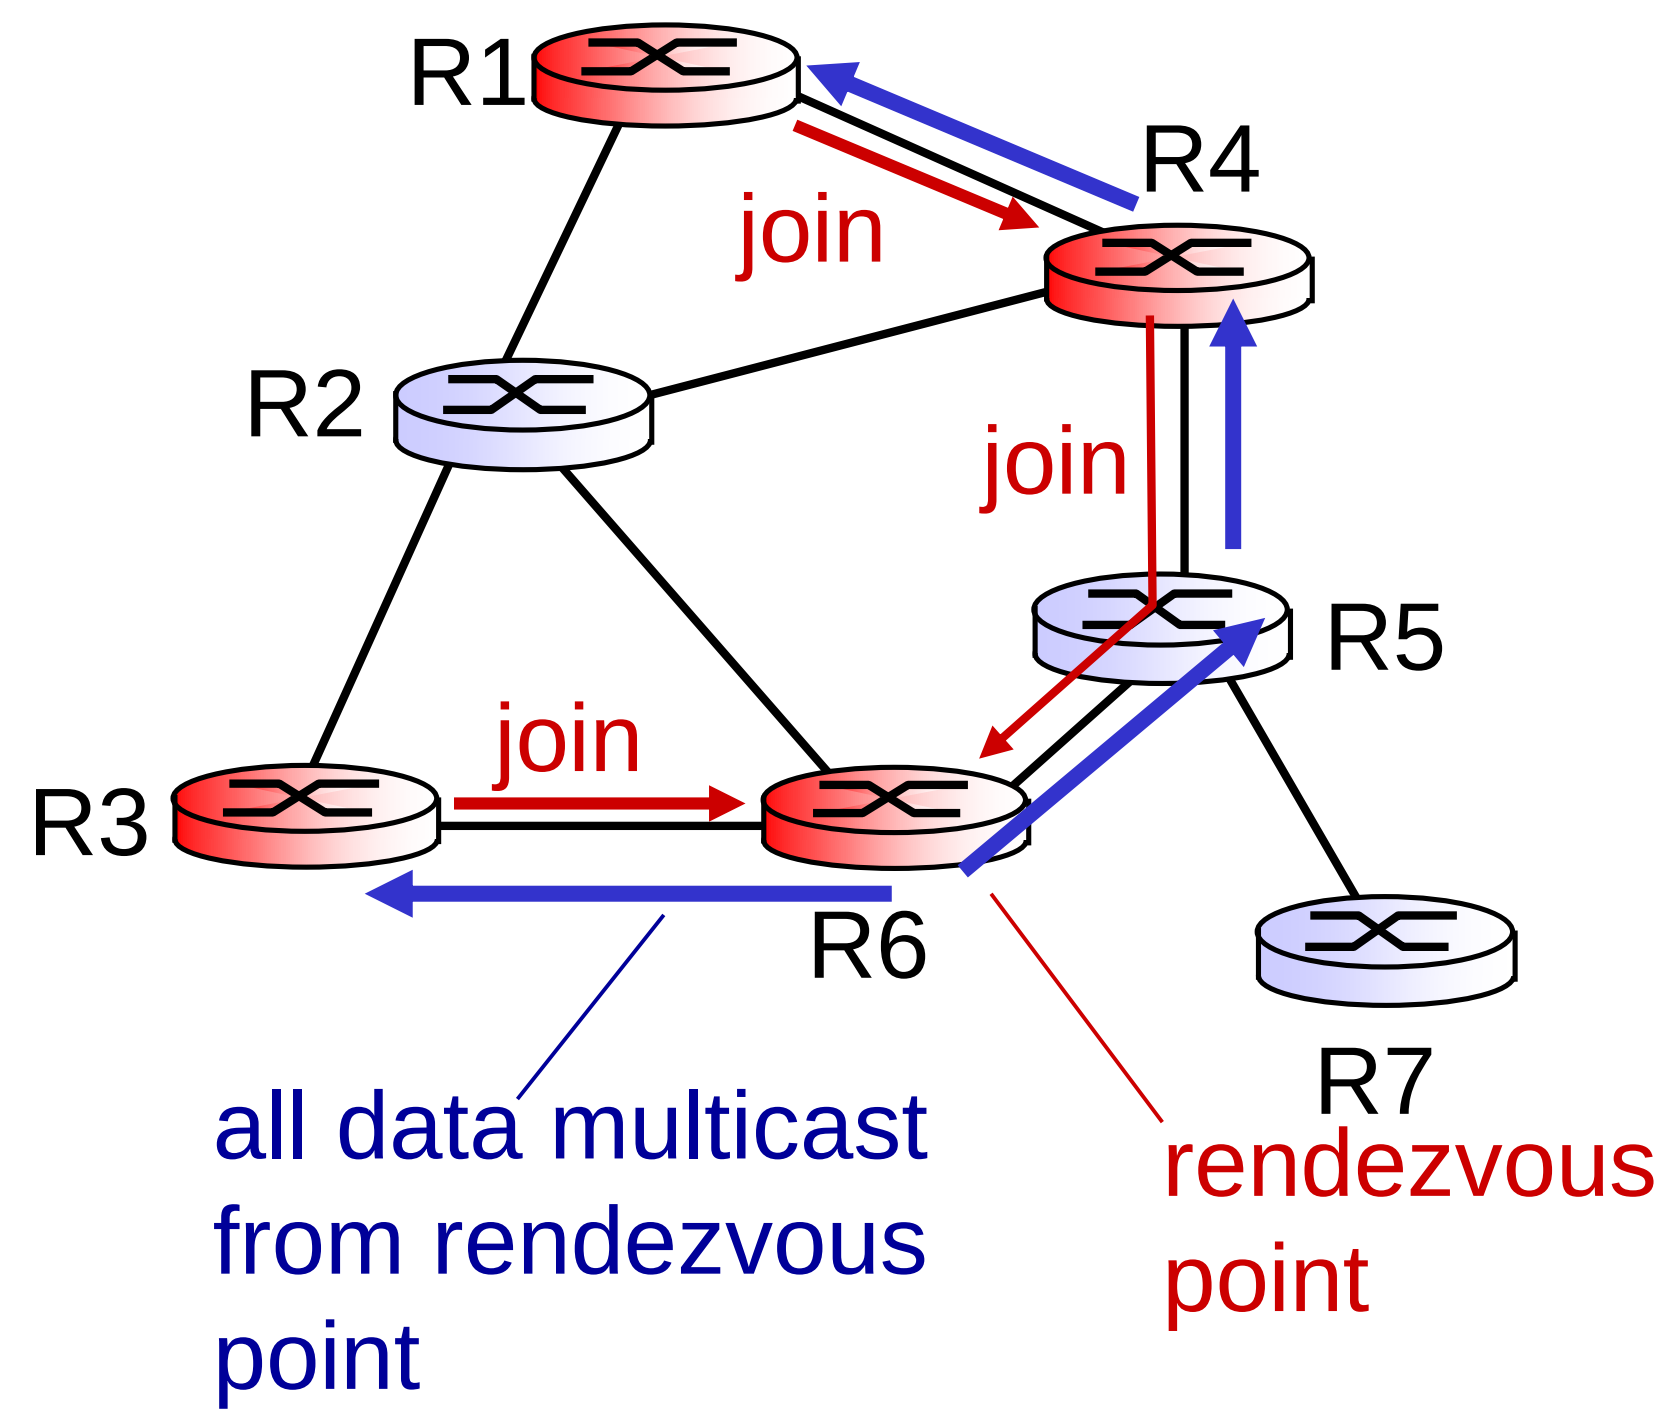

PIM - sparse mode

sender(s):

- unicast data to RP, which distributes down RP-rooted tree
- RP can extend mcast tree upstream to source
- RP can send *stop* msg if no attached receivers
  - "no one is listening!"