


01 / DEVKIT SOCKETS

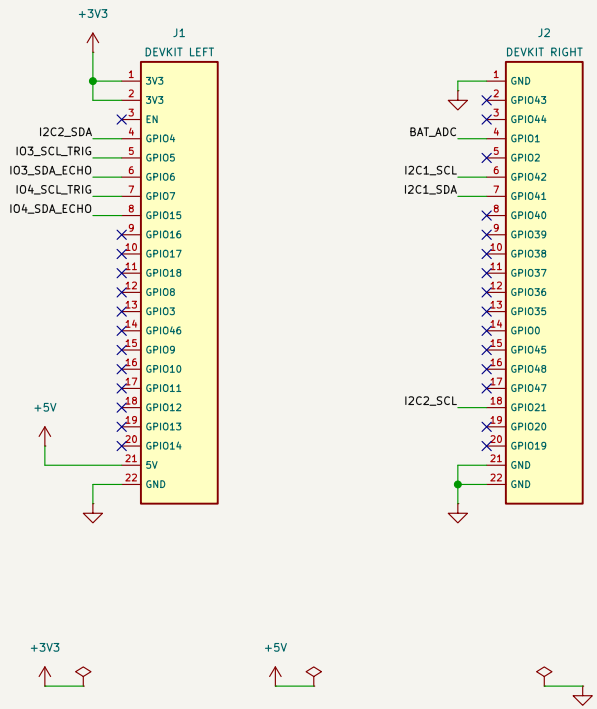

02 / SENSOR 1–2 / HW I2C

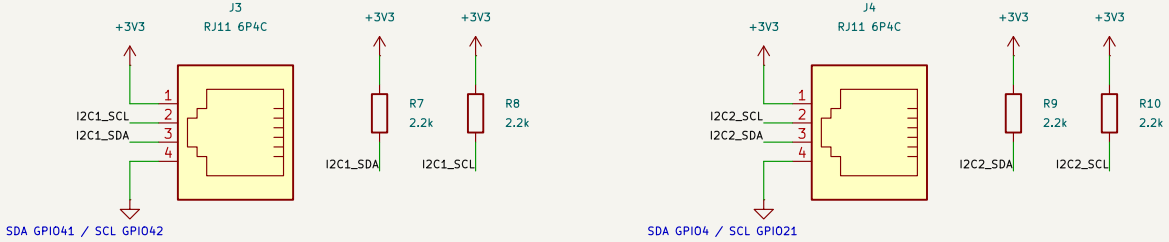

03 / SENSOR 3–4 / SW I2C OR ULTRASONIC

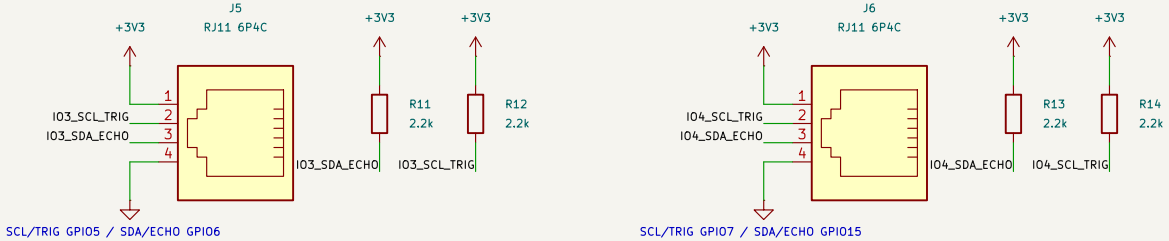


J3–J6: 1=3V3, 2=SCL/TRIG, 3=SDA/ECHO, 4=GND.

3.3 V POWER AND SIGNALS ONLY; GPIO DIRECT, NO DIVIDER.

Ultrasonic modules must support a 3.3 V supply.

04 / BATTERY VOLTAGE

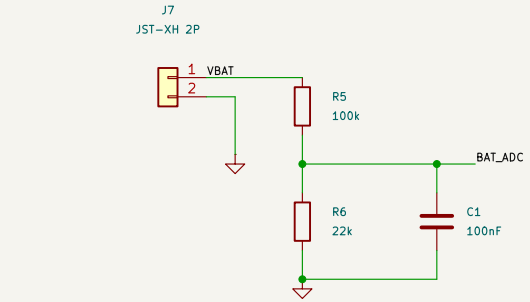

GPIO1 / ADC1_CH0: Vbat = Vadc x 122/22.

14.6 V to 2.633 V

R: 1%, 0603. C1: X7R, 50 V, 0603.

Sheet: /
File: sensor_controller.kicad_sch

Title: Cleany USB Sensor Board

Size: A4 | Date: | **Rev: 0.1**

KiCad E.D.A. 10.0.7 | Id: 1/1