LAB TASK 3

NETWORK TECHNOLOGIES

NAME: ASMA SALEEM

ROLL NO: 2024-CET-7

TASK: 3

SUBJECT: NETWORK TECHNOLOGIES

SUBMITTED TO: ENGR DR ASMA JAVAID

TASK: Create a Two LAN using packet tracert.

Step 1:

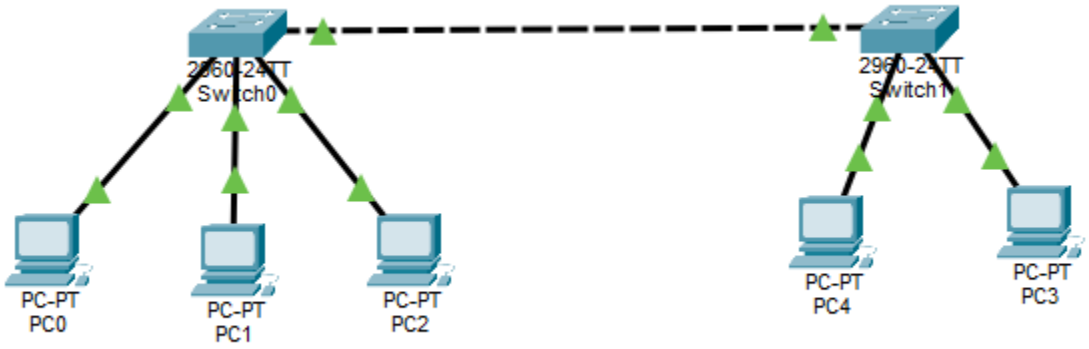

In this step, created two LAN using cisco packet tracer. Each LAN had multiple PCs through switches. After setting up both LANs, we connected them to enable communication between the networks.

IP addresses were assigned to all devices to ensure proper network configuration.

Step 2:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time=10ms TTL=128
Reply from 192.168.1.1: bytes=32 time=8ms TTL=128
Reply from 192.168.1.1: bytes=32 time=8ms TTL=128
Reply from 192.168.1.1: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 8ms, Maximum = 10ms, Average = 8ms

C:\>
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=7ms TTL=128
Reply from 192.168.1.2: bytes=32 time=8ms TTL=128
Reply from 192.168.1.2: bytes=32 time=8ms TTL=128
Reply from 192.168.1.2: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 7ms, Maximum = 8ms, Average = 7ms
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=7ms TTL=128
Reply from 192.168.1.3: bytes=32 time=8ms TTL=128
Reply from 192.168.1.3: bytes=32 time=8ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 8ms, Average = 5ms
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time=8ms TTL=128
Reply from 192.168.1.4: bytes=32 time=1ms TTL=128
Reply from 192.168.1.4: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 8ms, Average = 4ms
```

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time=1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time=10ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 10ms, Average = 2ms
```

In this step, we run ping command in different PCs in both LANs. The successful replies confirmed that each PC was properly connected and communicate between the networks correctly.