
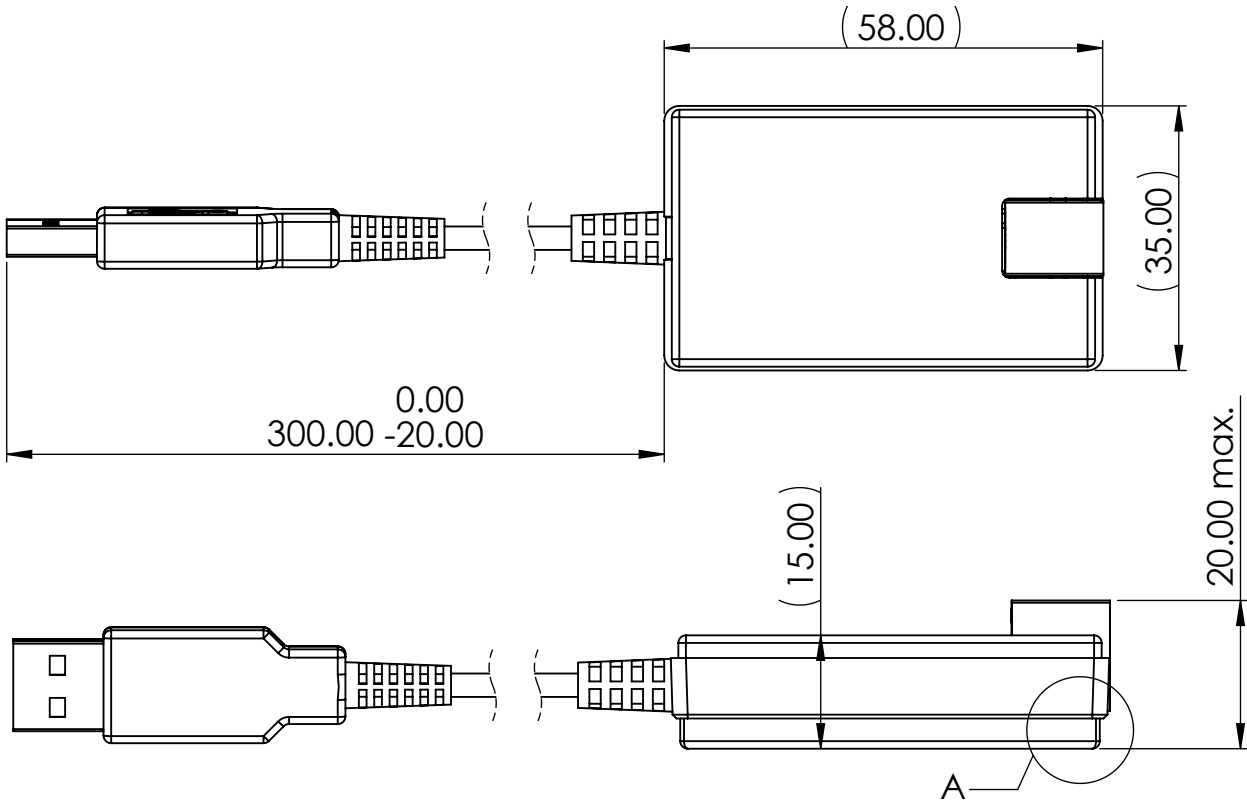


ITEM NO.	PART NUMBER	Description	DWG. NO.	QTY.
1	CaseBase		003	1
2	CaseLid		002	1
3	Spacer	Spacer	001	4
4	USB Type A Male for cable	Purchased Cable 0.3m	None	1
5	CableTailCard	Purchased product	None	1
6	USB-RS485-unit	PCB Assembly	004	1

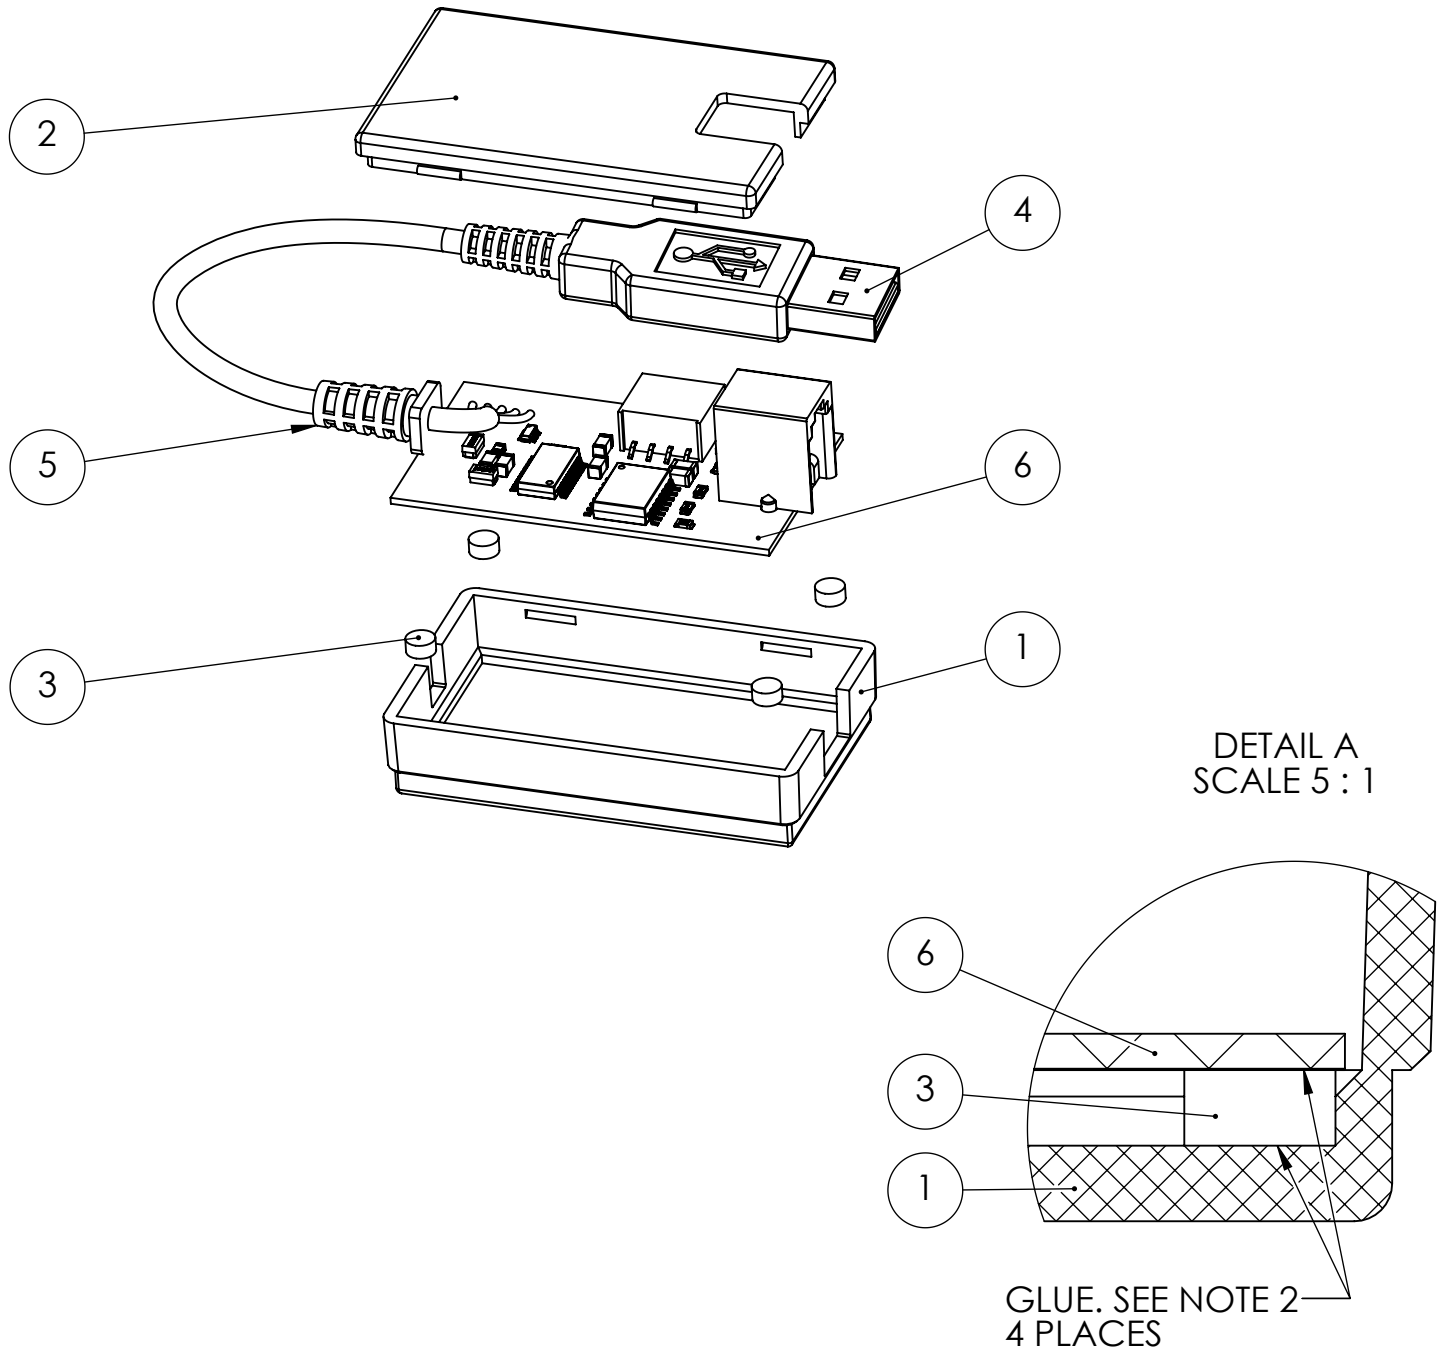

NOTE:

- For materials and manufacturing links refer to AssemblyBOM.pdf
- Soldering with no-clean Sn60Pb40 solder (Digkey P/N: 91-6040-9013-ND) or similar.
Strip wire jacket to 3mm.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF VR.
ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION
OF VR IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div>VR</div> VR		
		BREAK ALL SHARP EDGES	DRAWN			TITLE: <div>USB - RS-485</div>		
		DIMENSIONS ARE IN MILLIMETERS	CHECKED					
		TOLERANCES:	ENG APPR.					
		FRACTIONAL ±	MFG APPR.					
		ANGULAR: MACH ± BEND ±						
		TWO PLACE DECIMAL ±				SIZE DWG. NO. REV <div>B</div> 000 2.1		
		THREE PLACE DECIMAL ±						
		INTERPRET GEOMETRIC	Q.A.			SCALE: 1:1 WEIGHT: SHEET 1 OF 1		
		TOLERANCING PER:	COMMENTS:					
		MATERIAL						
		Multimaterial						
NEXT ASSY	USED ON	FINISH						
		None						
APPLICATION		DO NOT SCALE DRAWING						