CRP-RS04-03
CRP-RS06-06

SCARA ROBOTS



FUNCTIONAL FEATURES


- Compact and flexible structure, fast running speed, high transmission accuracy and low noise
- Highly rigid arm design realizes high load and high speed in one package
- Available in 600 and 400 mm arm span; 3kg or 6kg payload.
- Adapt to G3 control cabinet, provide 23 input and 23 output custom IO;support serial port, network, USB and other interface forms
- Suitable for handling, palletizing, assembly, 3C and other application fields.

ROBOT BODY TECHNICAL PARAMETERS


Robot Model		CRP-RS04-03	CRP-RS06-06
Function		Material handling, 3C	Material handling, 3C
Total axes		4	4
Maximum reach		400mm	600mm
Payload	Rated load	1kg	3kg
	Maximum load	3kg	6kg
Permissible inertial torque of rotating axis	Rated load	0.005kg.m²	0.01kg.m²
	Maximum load	0.05kg.m²	0.12kg.m²
Repeated positioning accuracy	1st axis + 2nd axis	±0.01mm	±0.02mm
	3rd axis (elevating axis)	±0.01mm	±0.01mm
	4th axis (rotation axis)	±0.01 °	±0.01 °
Max speed	1st axis	720 °/sec	450 °/sec
	2nd axis	720 °/sec	720 °/sec
	3rd axis (elevating axis)	1000mm/sec	1000mm/sec
	4th axis (rotation axis)	2500 °/sec	2000 °/sec
Max operating area	1st axis	±132 °	±132 °
	2nd axis	±141 °	±145 °
	3rd axis (elevating axis)	170mm	220mm
	4th axis (rotation axis)	±360 °	±360 °
Installation method		Floor mounted	Floor mounted
Robot body weight		13Kg	17Kg
Power consumption		0.7kw	0.8kw
Installation environment	Temperature	0~45°C	0~45°C
	Humidity	20~80% RH(no condensation)	20~80% RH(no condensation)
	Vibration	Under 4.9M/S²	Under 4.9M/S²
Electric Cabinet Configuration		C6	

MOTION RANGE DIAGRAM

CRP-RS04-03

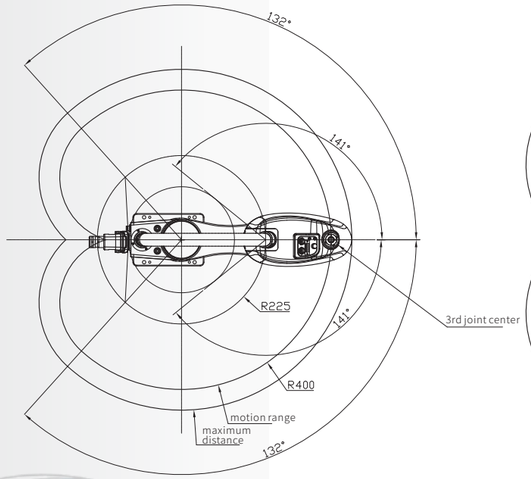


CRP-RS06-06

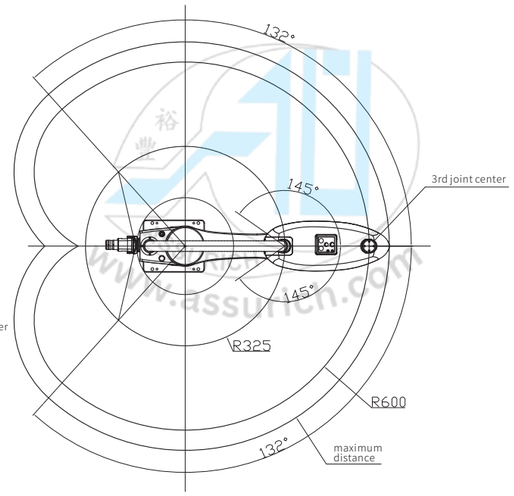

INSTALLATION INTERFACE DIAGRAM

CRP-RS04-03

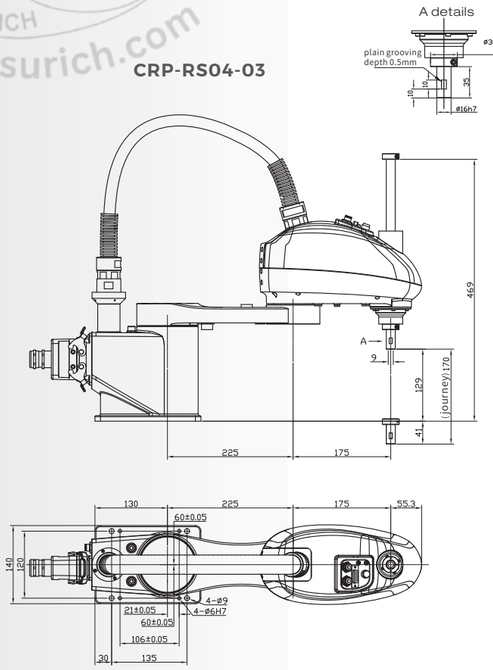

CRP-RS06-06

