Electric chain hoists EKZ

Load capacities up to 1.250 kg

Structure and application

Robust and high-performance chain hoists with long service life for loads up to 1.250 kg. In combination with the lightweight aluminium profiles and vacuum lifters, the chain hoists ensure smooth and ergonomic production processes and guarantee maximum operational safety. As standard, the chain hoists are equipped with a pendant control, but they can optionally also be operated via the vacuum lifting device, which significantly increases user convenience.

- Very robust, low-noise, and durable design
- Contactor-controlled version, also suitable for radio control
- Low-maintenance and service-friendly construction
- Standard lift: 3.000 mm with 2.000 mm pendant control
- High operational safety thanks to 48 VDC control voltage
- PowerBox for supplying power to a vacuum lifter
- CraneBox for controlling the chain hoist from the vacuum lifter



Chain hoist with pendant control

For controlling the chain hoist as well as other electric movements.



Electric chain hoist without pendant control

When used together with the CraneBox, the chain hoists can be operated directly from a vacuum lifter.



Power-Box

For supplying power to vacuum lifters, with power connection via plug.




Crane-Box

For power supply and for controlling all crane functions directly via the vacuum lifter's ControlBox.

Electric chain hoists EKZ

Technical data

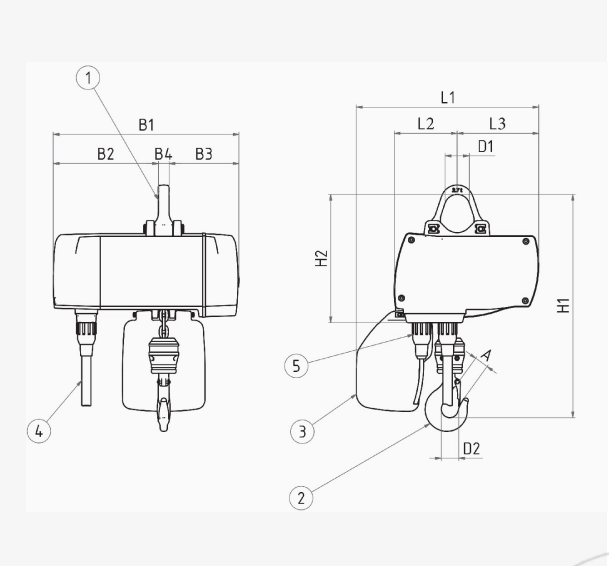

1 Suspension eye for trolley

2 Crane hook

3 Chain cassette

4 Connection for pendant control or CraneBox

5 Connection for power supply or PowerBox

Load capacity (kg)	Type	Lift (m/min)	Lift (mm)	Drive power (kW)	L1 (mm)	L2 (mm)	L3 (mm)	B1 (mm)	B2 (mm)	B3 (mm)	B4 (mm)	H1 (mm)	H2 (mm)	D1 (mm)	D2 (mm)	A (mm)	Dead weight (kg)
125	GM2	2/8	3.000	0,09/0,35	297	103	132	346	175	171	24	348	198	40	30	19	22
250	GM2	2/8	3.000	0,09/0,35	297	103	132	346	175	171	24	348	198	40	30	19	22
320	GM2	1/4	3.000	0,09/0,35	297	103	132	346	175	171	24	348	198	40	30	19	22
	GM4	2/8	3.000	0,22/0,9	353	120	156	402	217	185	24	400	237	40	36	25	35
500	GM2	1/4	3.000	0,09/0,35	297	103	132	346	175	171	24	348	198	40	30	19	22
	GM4	2/8	3.000	0,22/0,9	353	120	156	402	217	185	24	400	237	40	36	25	35
630	GM4	1/4	3.000	0,22/0,9	353	120	156	402	217	185	24	400	237	40	36	25	35
	GM6	2/8	3.000	0,4/1,7	466	160	211	472	281	191	28	494	303	63	43	31	58
800	GM4	1/4	3.000	0,22/0,9	353	120	156	402	217	185	24	400	237	40	36	25	35
	GM6	2/8	3.000	0,4/1,7	466	160	211	472	281	191	28	494	303	63	43	31	58
1.000	GM4	1/4	3.000	0,22/0,9	353	120	156	402	217	185	24	400	237	40	36	25	35
	GM6	2/8	3.000	0,4/1,7	466	160	211	472	281	191	28	494	303	63	43	31	58
1.250	GM4	1/4	3.000	0,22/0,9	353	120	156	402	217	185	24	400	237	40	36	25	35
	GM6	2/8	3.000	0,4/1,7	466	160	211	472	281	191	28	494	303	63	43	31	58



Workstations

Versatile, reliable, process-safe

Whether you need to machine workpieces from all sides, move them around, or rotate them in a fixed position – Fezer workstations are the ideal addition to your production processes.

Fezer workstations are extremely versatile and support you in a wide range of applications within your daily production processes. With the VacuStand work stands, you can machine workpieces from all sides or use the stand for more complex assembly tasks in which the workpieces must be held in various positions. For mobile use, the VacuStand can also be equipped with castors or mounted on a mobile base plate.

If you need mobile support with electric height adjustment, the Mobilift series offers the ideal solution. It can be moved effortlessly by hand using an ergonomic control handle and allows loads to be raised quickly and easily to the desired height. This enables you to move loads with minimal effort while ensuring an ergonomic working posture.

For heavy load movements that need to be integrated into your production processes, Fezer offers fully electrically powered workstations. These allow you to swivel or completely rotate large panels in the shortest possible time. Thanks to their customized design, the stations are precisely tailored to your needs and requirements. They ensure efficient and effective process optimization while simultaneously increasing safety at your workplaces.

Overview	Application	Handling	max. workpiece dimensions	max. load capacity	Page
VacuStand	All-round machining, assembly aid	Horizontal, swivel, vertical	2.000x1.000 mm	125 kg	126
Workstations	Support of production processes	Horizontal, swivel, rotate	12.000x4.000 mm	500 kg	130
Mobilift	Mobile workstation with lifting mast	Horizontal, swivel, turn, vertical	2.500x1.000 mm	1.000 kg	132

ASSURICH www.assurich.com