MobiliftMini ML

Mobile lifting stacker up to 200 kg

Structure and application

The mobile lifting stackers with electric lift mast and independent power supply are ideal for load handling where precise positioning is required, such as loading or unloading shelves or load carriers. The robust and smooth-running castors allow movement with minimal effort by a single operator. By integrating vacuum grippers and electric motion functions, the devices can be customized to efficiently support your workflows.

- Efficient support for workflows involving light loads
- Base unit with lift mast, battery, and charger
- Easy operation via intuitive joystick
- Optional gripping tools with vacuum or mechanical units
- Optional gripping tools with various motion axes
- Clear pendant control for additional functions
- Assembly and production support of any kind
- Loading, unloading, and repositioning of workpieces



MobiliftMini ML-100KG-1500

For loading a decoiler mandrel with copper coils.



MobiliftMini ML-100KG-2000

With manual rotating unit for window elements.



MobiliftMini ML-200KG-2000

With integrated vacuum lifter for removing containers.



MobiliftMini ML-200-1500-100KG

With integrated vacuum technology for handling sheet-metal containers.



MobiliftMini ML-200-2000-100KG

With integrated vacuum technology and electric swivelling unit for window elements.




MobiliftMini ML-100KG-2000

With integrated vacuum technology and electric swivelling unit for coil elements.

MobiliftMini ML

Technical data

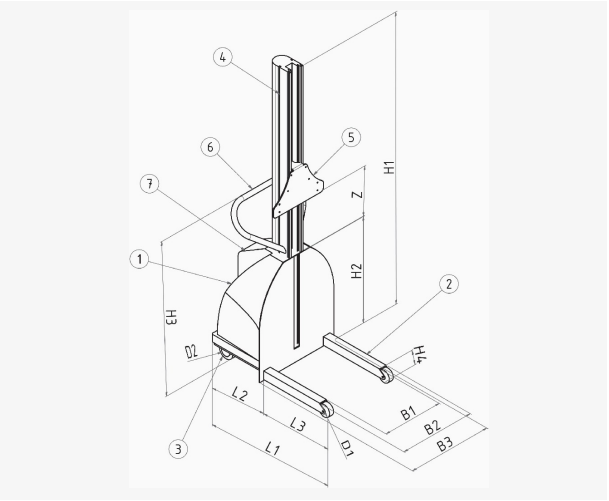

1. Power supply unit with batteries, lifting cylinder, and electronics
2. Fork carrier with rigid castors
3. Steering castors with optional parking brakes
4. Lift mast with integrated trolley
5. Base plate for mounting the handling unit
6. Control handle for guiding the lift truck
7. Control panel with main switch and charge level indicator
8. Electronic warning device with signal horn

Type	Load capacity (kg)	max. lift (mm)	max. lifting speed (m/min)	permissible tipping moment front (Nm)	permissible tipping moment lateral (Nm)	battery voltage (V)	battery capacity (Ah)	dead weight (kg)
ML-100-1500	100	1.500	2	125	75	2x12V	17	80
ML-100-2000	100	2.000	2	125	75	2x12V	17	85
ML-200-1500	200	1.500	2	125	75	2x12V	40	95
ML-200-2000	200	2.000	2	125	75	2x12V	40	100

Type	L1 (mm)	L2 (mm)	L3 (mm)	B1 (mm)	B2 (mm)	B3 (mm)	H1 (mm)	H2 (mm)	H3	H4	Z	D1 (mm)	D2 (mm)
ML-100-1500	860	360	500	400	500	565	1.925	785	1080	80	1.500	80	100
ML-100-2000	860	360	500	400	500	565	2.425	785	1080	80	2.000	80	100
ML-200-1500	860	360	500	400	500	565	1.925	785	1080	80	1.500	80	100
ML-200-2000	860	360	500	400	500	565	2.425	785	1080	80	2.000	80	100

MobiliftMaxi ML

Mobile lifting stacker up to 500 kg

Structure and application

When heavy loads need to be moved quickly, easily, and efficiently without crane support, these devices provide the best possible assistance. The double-mast design ensures high lifting capacities and precise positioning. The large, heavy-duty castors with parking brakes reduce starting forces, making the stacker easy to maneuver by a single operator. Custom-adapted gripping tools and motion functions ensure smooth production workflows.

- Efficient support for workflows involving heavy loads
- Base unit with double lift mast, battery, and charger
- Narrow and wide versions of the support arms
- Optional gripping tools with vacuum or mechanical units
- Electric drives for rotating, swivelling, or turning
- Clear pendant control for additional functions
- Assembly and production support of all kinds
- Loading, unloading, and repositioning of workpieces



MobiliftMaxi ML-3000-250KG

With electric rotary and adjustment drive for loading and unloading large and heavy tool molds.



MobiLiftMaxi ML-2000-500KG

In the pre-assembly of engine hoods with additional safety features for overhead installation.




MobiLiftMaxi ML-2000-500KG

In the pre-assembly of engine hoods in the rotated position.

MobiliftMaxi ML

Technical data

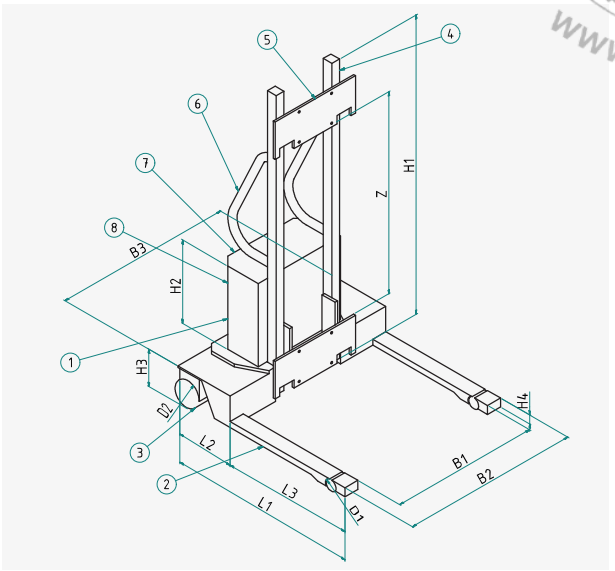

1. Power supply unit with batteries, lifting cylinder, and electronics
2. Fork carrier with rigid castors
3. Steering castors with optional parking brakes
4. Lift mast with integrated carriage
5. Base plate for mounting the handling unit
6. Control handle for guiding the lift truck
7. Control panel with main switch and charge level indicator
8. Electronic warning device with signal horn

Type	Load capacity (kg)	max. lift (mm)	max. lifting speed (m/min)	permissible tipping moment front (Nm)	permissible tipping moment lateral (Nm)	battery voltage (V)	battery capacity (Ah)	dead weight (kg)
ML-250-2000	250	2.000	2-3	1.250	750	2x12	60-120	340-380
ML-250-3000	250	3.000	2-3	1.250	750	2x12	60-120	360-400
ML-500-2000	500	2.000	2-3	1.250	750	2x12	60-120	360-400
ML-500-3000	500	3.000	2-3	1.250	750	2x12	60-120	380-420

Type	L1 (mm)	L2 (mm)	L3 (mm)	B1 (mm)	B2 (mm)	B3 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	Z (mm)	D1 (mm)	D2 (mm)
ML-250-2000	1.280	380	900	1.000	1.200	1.250	2.480	800	225	80	2.000	65	180
ML-250-3000	1.280	380	900	1.000	1.200	1.250	3.480	800	225	80	3.000	65	180
ML-500-2000	1.280	380	900	1.000	1.200	1.250	2.480	800	225	80	2.000	65	180
ML-500-3000	1.280	380	900	1.000	1.200	1.250	3.480	800	225	80	3.000	65	180