

Crane systems and rigid lifting guides

Smooth, innovative and ergonomic

The new low-friction aluminium crane profiles ensure effortless handling of heavy loads up to 800 kg.

The low-friction aluminium crane profiles combine high load capacity with very low dead weight, reducing all movement processes to a minimum of physical effort. This not only makes handling easier but also reduces physical strain on employees, helping to prevent work absences due to injury or illness. Move even more with ease – with the new low-friction profiles, our slogan is impressively brought to life. The system is completed by weight-optimised trolleys that can be moved almost effortlessly thanks to specialised rollers.

Thanks to the innovative modular system, our crane installations can be adapted to a wide variety of requirements with ease. Whether jib cranes, linear systems or area-covering crane systems – the aluminium profiles can be cut to any length and combined in numerous ways using different connection elements. This results in crane installations that are tailored precisely and without compromise to your needs and requirements. Even telescopic crane systems or systems with minimal overall height for confined spaces can be implemented without extensive design effort.

Overview	Application	Handling	max. Coverage	max. Load capacities	Page
Fundamentals					94
Crane systems	Linear and area transport	with chain hoist or vacuum lifter	50.000 x 12.000 mm	500 kg	94
Liftfix	Rigid lifting guide system	precise positioning handling	20.000 x 12.000 mm	500 kg	108
Jib cranes	Radial transport	with chain hoist or vacuum lifter	8.000 mm	500 kg	110
Installation	Mounting of columns				120
Electric chain hoists	Lifting transport of loads	with ropes, belts or vacuum lifters	3.000-5.000 mm	1.250 kg	122

ASSURICH www.assurich.com

Crane systems

Aluminium low-friction profile ALP


Structure and application

The new aluminium low-friction profiles are specifically designed for handling heavy loads. Thanks to the low dead weight of the profiles, the masses to be moved are reduced, significantly relieving the operator. In addition, all trolleys are equipped with high-quality, extremely smooth-running rollers that make initial movement much easier and reduce the effort required to move heavy loads to an absolute minimum.

- Smooth-running crane profile with hollow-chamber design
- Easy and ergonomic handling
- Low starting resistance due to high-quality low-friction rollers
- Modular construction kit system
- Customisable to individual customer requirements
- Versatile range of accessories and configuration options



Aluminium low-friction profiles ALP-95 to ALP-215

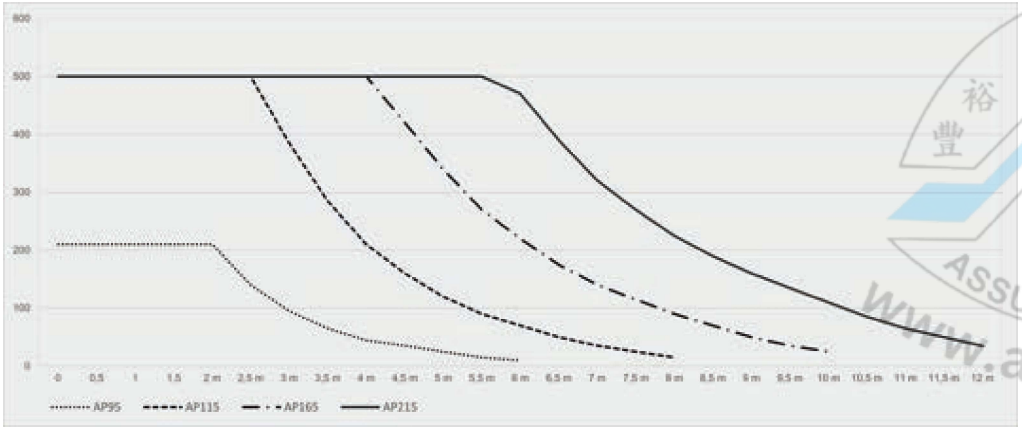


Load chart for aluminium low-friction profiles ALP-95 to ALP-215

Crane systems


Technical data

Thanks to the optimised hollow-chamber geometry, the ratio between dead weight and load capacity has been maximised. The use of a special, high-grade aluminium alloy expands the application possibilities of the crane profiles and ensures a robust, reliable and above all long-lasting design for all crane systems.


- Four coordinated and combinable profile sizes
- Weight-optimised hollow-chamber design
- High-quality aluminium alloy (6063 T66), natural anodised
- Profile lengths up to 12.000 mm extendable with profile connectors
- Internal and external slots for stops and mounts
- Versatile accessory programme and customisation options




AP-95



AP-115



AP-165



AP-215

Type	I	W	max. Load capacity	Weight	B1	B2	B3	B4	B5	B6	B7	B8	H1	H2	H3	H4	H5	H6	H7	H8
	(cm4)	(cm3)	(kg)	(kg/m)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
AP-95	101	19	150	2,65	67	63	20	26	62	9			95	61,5	3	13	10,5			
AP-115	428	72	500	7,10	104	63	20	26	62	9	21	12	115	61,5	14,5	13	15	93	9	15
AP-165	1.115	130	500	9,20	104	63	20	26	62	9	21	10	165	61,5	14,5	13	9	143	9	15
AP-215	2.189	208	500	10,60	104	63	20	26	62	9	21	10	215	61,5	14,5	13	9	193	9	15

Type	2.000	2.500	3.000	3.500	4.000	4.500	5.000	5.500	6.000	6.500	7.000	7.500	8.000	8.500	9.000	9.500	10.000	10.500	11.000	11.500	12.000
	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)	(kg)
AP-95	210	130	90	65	45	35	25	15	10												
AP-115	500	500	385	275	205	155	120	90	70	50	35	25	15								
AP-165	500	500	500	500	500	430	340	270	220	175	140	115	90	70	50	35	25				
AP-215	500	500	500	500	500	500	500	500	465	385	320	270	225	190	160	130	110	85	65	50	35

max. load capacity at different suspension distances (mm)

Crane systems
Basic components

Basic components

A wide range of standardised components allows the crane systems to be adapted to a broad spectrum of requirements. Stable and robust connections enable virtually unlimited crane runway lengths, allowing very large working areas to be covered. End stops, intermediate stops and buffer elements make it possible to use multiple crane bridges in multi-girder systems.



End stop with buffer

The rubber buffers provide sufficient damping when the crane system reaches its end positions.



Intermediate stop with buffer

Positionable intermediate stop with high damping capacity for separating different working areas.



Profile connector

Robust connecting plate for crane runways of any length. The connection must be made near a suspension point.



Trolley FW-250/500 kg

With 4 running rollers (from 250 kg upward with 2 additional guide rollers) for maximum load capacity and minimal rolling resistance.



Bridge trolley BW-500 kg

With 4–6 running rollers, two lateral guide rollers and a rigid connection plate for minimal overall height combined with exceptionally smooth travel.



Hose and cable trolley

Lightweight and robust plastic trolleys with mounts for cable or hose feeds.



Electrical conductor rail

Cable-free power supply, eliminating the need for cable or hose storage areas and increasing usable workspace.



Electric travel drive

Robust friction wheel drive for all profile sizes – with two travel speeds for smooth starting and rapid movement.

Crane systems
Basic components

Suspensions

A wide range of suspension options is available for mounting the crane runways, covering virtually all application requirements. Whether ceiling or wall mountings, or clamping to beams or columns – the stable and robust fastening elements ensure safe and straightforward suspension of the crane components. In addition, numerous options are available to meet your specific requirements.



Direct suspension

Mounting to ceilings where space is extremely limited. No compensation for height differences possible.



Rigid suspension

Ceiling/beam mounting with height compensation and upward force absorption – available in various lengths.



Pendulum suspension

For mounting to ceilings or steel beams – with height compensation and up to 6° suspension angle, available in various lengths.



Beam clamping

Ceiling structures with T-beams allow easy attachment using clamping elements.



Beam enclosure

For fastening to beams and glulam elements where drilling is not permitted – with bolted connections in various lengths to accommodate different beam



Wall/column mounting

Steel consoles are available for anchoring or clamping to walls or columns.



Beam reinforcement

Profile reinforcement for long crane bridges to achieve higher load capacities.



Beam elevation

When vertical space is extremely limited, the crane beam can be elevated.

Single- and double-rail cranes ESK/ZSK

Linear transport

Structure and application

Pure linear transport of loads along a single axis. Depending on the required load capacity, one or two rails are used. The single- and double-rail cranes can also be equipped with jib cranes, allowing additional workspace areas to be covered.

- Linear load transport along one axis
- Load capacity up to 500 kg
- Low overall height
- Track lengths as long as required
- Expansion options with jib cranes



HBS-ESK-125KG-12000

Single-rail crane for repositioning panel materials.



HBS-ZSK-100KG-22000-SK-4000

Double-rail crane with slewing ring for extensive area coverage.



HBS-ZSK-500KG-8000

Double-rail crane with two chain hoists for handling floor elements.




HBS-ZSK-500KG-6000

Double-rail crane with Liftfix for sheet loading of a laser cutting system.

Single- and double-rail cranes ESK/ZSK

Technical data

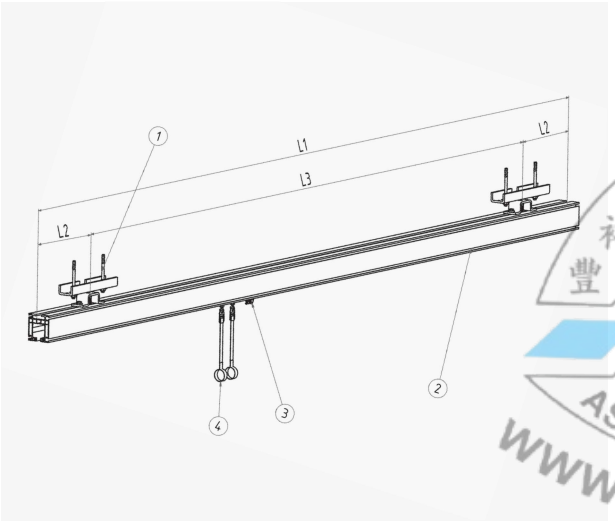

1 Suspension

2 Crane rail

3 Travel trolley or bridge trolley

4 Hose or cable trolley

AP Profile	Single-rail crane										
(mm)	2.000	3.000	4.000	5.000	6.000	7.000	8.000	9.000	10.000	11.000	12.000
AP-95	210	90	45	25	10						
AP-115	500	385	205	120	70	35	15				
AP-165	500	500	500	340	220	140	90	50	25		
AP-215	500	500	500	500	465	320	225	160	110	65	35

max. load capacity (kg) at different suspension distances (mm)

AP Profile	Double-rail crane										
(mm)	2.000	3.000	4.000	5.000	6.000	7.000	8.000	9.000	10.000	11.000	12.000
AP-95	420	180	90	50	20						
AP-115	500	500	410	240	140	70	30				
AP-165	500	500	500	500	440	280	180	100	50		
AP-215	500	500	500	500	500	500	450	320	220	130	70

max. load capacity (kg) at different suspension distances (mm)

Single-girder crane systems ETK

Area transport

Structure and application

Single-girder systems consist of a crane runway of any length and a single bridge for load handling – allowing work areas to be covered across two axes.

- Area-covering working zones on two axes
- Load capacity up to 500 kg
- Optimal use of space with minimal effort
- Low overall height thanks to raised-runway or down-side-up configurations



HBS-ETK-250KG-8000x4000

Single-girder crane system with steel substructure for cantilevered extension out of a CNC machining area.



HBS-ETK-500KG-12000x6000

Single-girder crane system with reinforced bridge for higher load capacity.



HBS-ETK-80KG-16000x12000

Single-girder crane system with 3 crane runways to span a bridge length of up to 12.000 mm.




HBS-ETKA-60KG-8000x4000

Single-girder crane system with raised-runway configuration for minimal overall height and maximum lifting range.

Single-girder crane systems ETK

Technical data

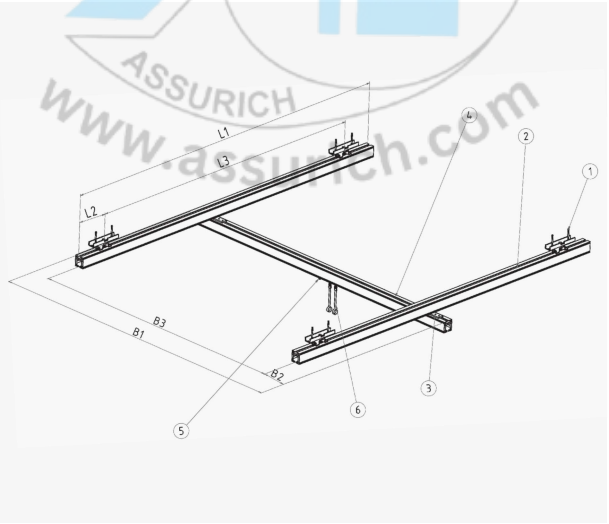

1 Suspension

2 Crane rail

3 Bridge trolley

4 Single-girder bridge

5 Trolley

6 Hose or cable trolley

AP Profile	Single-girder crane runway										
(mm)	2.000	3.000	4.000	5.000	6.000	7.000	8.000	9.000	10.000	11.000	12.000
AP-95	210	90	45	25							
AP-115	500	385	205	120	70	35					
AP-165	500	500	500	340	220	140	90	50	25		
AP-215	500	500	500	500	465	320	225	160	110	65	35

Max. load capacity (kg) at different suspension distances (mm)

AP Profile	Single-girder crane bridge										
(mm)	2.000	3.000	4.000	5.000	6.000	7.000	8.000	9.000	10.000	11.000	12.000
AP-95	210	90	45	25							
AP-115	500	385	205	120	70	35					
AP-165	500	500	500	340	220	140	90	50	25		
AP-215	500	500	500	500	465	320	225	160	110	65	35

Max. load capacity (kg) at different track widths (mm)

Double-girder crane systems ZTK

Area transport

Structure and application

Double-girder systems consist of a crane runway of any length and a double bridge for load handling. This allows even very heavy loads to be moved across two axes. Double-girder systems are also suitable for integrating rigid lifting systems or manipulators.

- Area-covering working zones on two axes
- Transport of very heavy loads
- Optimal use of space with minimal effort
- Integration of rigid lifting systems and manipulators



HBS-ZTK-500KG-8000x6000

Double-girder crane with a span of 6.000 mm.



HBS-ZTK-800KG-6000x8000

Double-girder crane for spanning a bridge length of 8.000 mm.



HBS-ZTK-320KG-8000-4000

Double-girder crane with 2 chain hoists and automatically reachable pick-up and drop-off positions.




HBS-ZTK-500KG-TEL-8000x6000

Double-girder crane with the rigid Liftfix lifting system.

Double-girder crane systems ZTK

Technical data

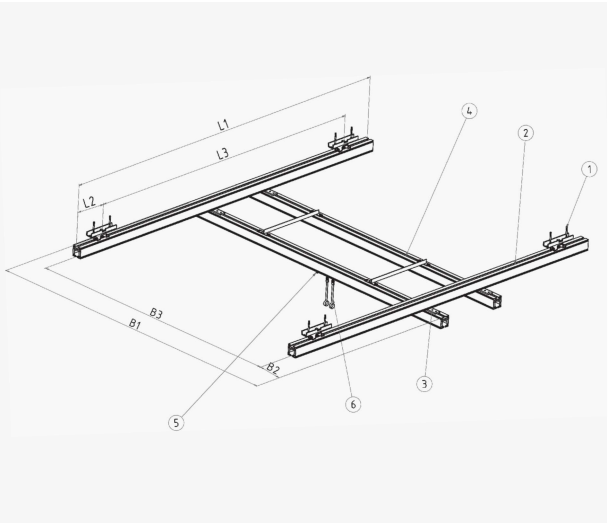

1 Suspension

2 Crane rail

3 Bridge trolley

4 Double-girder bridge

5 Trolley

6 Hose or cable trolley

AP Profile	Double-girder crane runway										
(mm)	2.000	3.000	4.000	5.000	6.000	7.000	8.000	9.000	10.000	11.000	12.000
AP-95	210	90	45	25							
AP-115	500	385	205	120	70	35					
AP-165	500	500	500	340	220	140	90	50	25		
AP-215	500	500	500	500	465	320	225	160	110	65	35

Max. load capacity (kg) at different suspension distances (mm)

AP Profile	Double-girder crane bridge										
(mm)	2.000	3.000	4.000	5.000	6.000	7.000	8.000	9.000	10.000	11.000	12.000
AP-95	420	180	90	50							
AP-115	500	500	410	240	140	70	30				
AP-165	500	500	500	500	440	280	180	100	50		
AP-215	500	500	500	500	500	500	450	320	220	130	70

Max. load capacity (kg) at different track widths (mm)

Telescopic crane systems TEL

Area transport

Structure and application

Telescopic rails can be suspended from single- or dual-rail runways. High-capacity transport trolleys absorb the occurring moments and ensure smooth, low-effort extension and retraction. Retracting spring balancers can be used to support the retraction process.

- Coverage of work areas on one or two axes
- Bypassing obstacles or columns
- Optimal use of space with minimal effort
- Reaching areas outside the standard working zone



HBS-DB-500KG-8000x4000-TEL2000

Loading of a CNC machining station via a telescopic double bridge.



HBS-EB-80KG-12000x4000-TEL1500

Telescopic single bridges on a multi-girder crane system.



HBS-EB-80KG-10000x4000-TEL1500

Single-girder crane system with a telescopic single bridge.




HBS-EB-60KG-6000x4000-TEL2500

Single-girder crane system with a telescopic single bridge for handling bags outside the standard working area.

Telescopic crane systems TEL

Technical data

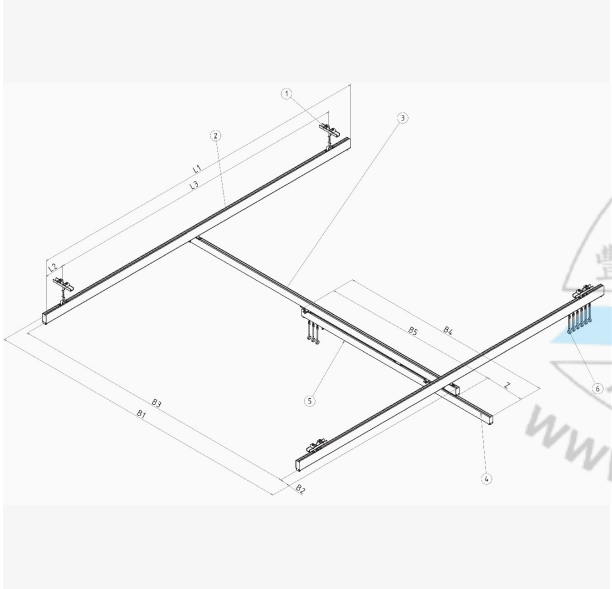

1. Suspension
2. Crane rail
3. Bridge or telescopic trolley
4. Telescopic rail
5. Trolley
6. Hose or cable trolley

AP Profile	Single-girder telescopic unit					
Extension of telescopic beam (mm)	500	1.000	1.500	2.000	2.500	3.000
Required length of crane beam (mm)	1.000	2.000	2.500	3.000	4.000	5.000
AP-115	125	100	75	50	25	
AP-165	275	200	150	100	60	30
AP-215	325	250	175	125	100	50

AP Profile	Double-girder telescopic unit					
Extension of telescopic beam (mm)	500	1.000	1.500	2.000	2.500	3.000
Required length of crane beam (mm)	1.000	2.000	2.500	3.000	4.000	5.000
AP-115	250	200	150	100	50	25
AP-165	500	400	300	200	120	60
AP-215	500	500	350	250	200	100

Max. load capacity (kg) for different telescopic lengths

Wall-mounted travelling cranes WLK

Area transport

Structure and application

Wall-mounted travelling cranes are used to cover large working areas where no supports or suspension options are available. The electrically powered trolleys enable fast and effortless movement of the cantilevered crane system, allowing work zones to be accessed freely and loads to be moved with ease.

- Area-covering working zones on two axes
- No supports or suspensions required
- Multiple travelling cranes possible on one axis
- Electric travel drive with radio control
- Optimal use of space with minimal effort



Wall-mounted travelling crane WLK-100KG-68.000x7.000

For chipboard, OSB, and plasterboard panels up to 3.500 × 1.300 mm.



Wall-mounted travelling crane WLK-100KG-68.000x7.000

With electrically driven jib (7.000 mm).



Wall-mounted travelling crane WLK-80KG-36.000x7.500

Suitable for Fermacell, MDF, and chipboard panels up to 3.000 × 1.250 mm.




Wall-mounted travelling crane WLK-120KG-44.000x7.000

With electrically driven jib (7.000 mm) and integrated collision prevention.

Wall-mounted travelling cranes WLK

Technical data

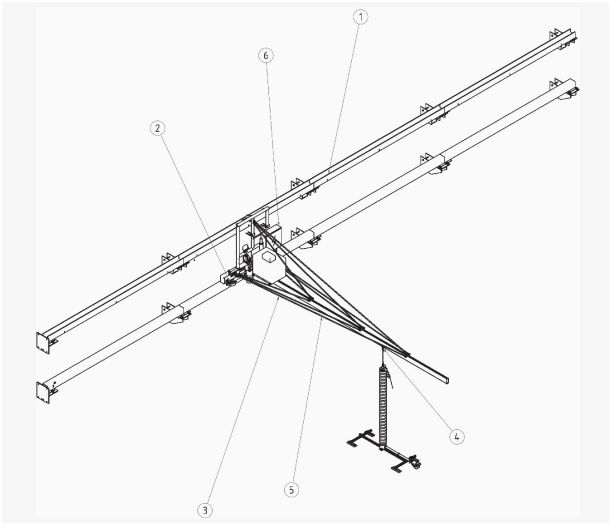

1 Crane runway with wall mounting

2 Trolley with friction wheel drive

3 Jib with stabilizing beams

4 Trolley

5 Hose or cable trolley

6 Installation area for accessory components

AP Profile	Jib						
(mm)	2.000	3.000	4.000	5.000	6.000	7.000	8.000
AP-165	250	250	250	200	170	145	125

Max. load capacity (kg) at different track widths (mm)

Liftfix LF – rigid lifting system

Linear and area transport, sway-free

Structure and application

In combination with the smooth-running aluminium rails, we offer a rigid lifting guide system that allows you to position loads precisely during lifting and lowering. The telescopic aluminium profiles with their robust and precise sliding guides enable large lifting heights with minimal overall height, while also allowing off-centre load moments to be absorbed. This makes loading overbuilt machining stations possible. The lifting motion can be finely controlled using a chain hoist with two speeds.

- Telescopic lifting system with sliding guides
- Lifting drive via chain hoist with two speeds and adjustable end-position cut-offs
- Friction wheel drives for electric travel in the X and Y directions
- Flange-mounted gripping tools with vacu um or mechanical clamping elements
- Ergonomic manipulation handles with all required control buttons



Liftfix LF-DT-250KG

Rigid lifting system with double telescopic unit for handling steel plates.



Liftfix LF-ET-125KG

Rigid lifting system with single telescopic unit for handling pipes.



Liftfix LF-ET-50KG

Rigid lifting system with single telescopic unit and projec- ting load handler for seat frames.




Liftfix LF-ET-80KG

Rigid lifting system with double telescopic unit for handling cover components in final assembly.

Liftfix LF – rigid lifting system

Technical data

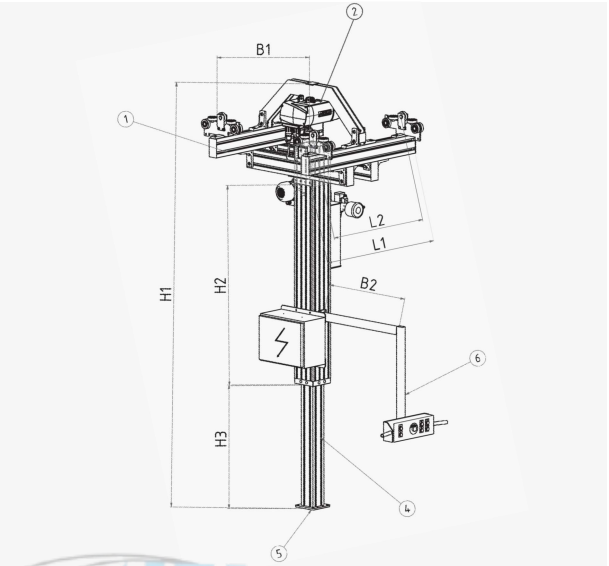

1. Travel frame with bridge trolleys
2. Chain hoist
3. Slewing ring (optional)
4. Telescopic guide in single or double version with slide bearings
5. Flange plate for gripping units
6. Ergonomic control handle with push buttons for electric movements and emergency stop

Load capacity (kg)	Type	max. Moment (Nm)	Lifting speed (m/min)	max. Lift Z (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L1 (mm)	L2 (mm)	B1 (mm)	B2 (mm)	Dead weight (kg)
125	LF-100-2	250	2/8	1.500	2.750	2.000	1.500	620	800	560	800	100-125
	LF-160-2	500	2/8	2.000	3.250	2.500	2.000	620	800	560	800	130-155
	LF-160-3	125	2/8	2.500	2.500	1.750	2.500	620	800	560	800	150-175
250	LF-100-2	250	2/8	1.500	2.750	2.000	1.500	620	800	560	800	105-130
	LF-160-2	500	2/8	2.000	3.250	2.500	2.000	620	800	560	800	135-160
	LF-160-3	125	2/8	2.500	2.500	1.750	2.500	620	800	560	800	155-180
320	LF-100-2	250	2/8	1.500	2.750	2.000	1.500	620	800	560	800	110-135
	LF-160-2	500	2/8	2.000	3.250	2.500	2.000	620	800	560	800	140-165
	LF-160-3	125	2/8	2.500	2.500	1.750	2.500	620	800	560	800	160-185
500	LF-100-2	250	2/8	1.500	2.750	2.000	1.500	620	800	560	800	115-140
	LF-160-2	500	2/8	2.000	3.250	2.500	2.000	620	800	560	800	145-170
	LF-160-3	125	2/8	2.500	2.500	1.750	2.500	620	800	560	800	165-190