Slewing cranes
Basic components

Structure



Swivel console DU

Stable and robust steel swivel console with extremely smooth-running slide bearings for slewing cranes up to 500 kg.



Swivel console KL

Heavy-duty and robust steel console with a ball-bearing shaft for slewing cranes up to 800 kg. Very smooth-running thanks to the ball-bearing design.



Adjustable tie rods

Tie rods with right/left-hand threads, allowing easy alignment of the jib into an exact horizontal position and improving running smoothness.



End stop with buffer

The rubber buffers provide sufficient damping when the crane system reaches its end positions.



Trolley

Robust, smooth-running trolleys with 4 or 6 running wheels for maximum load requirements.



Hose and cable trolleys

For supplying hoses and electrical power to vacuum tube lifters and chain hoists.



Main crane switch

For switching the crane system on and off. Also available in a lockable version for maintenance work.

Slewing cranes
Basic components

Options



Mobile base plates

For mobile use of column-mounted slewing cranes at different workstations. Relocation can be carried out using pallet trucks or forklifts.



Electric drives

Electric drives are available for both the slewing motion and the chain hoist, enabling effortless operation even with heavy loads.



Slewing limiters

Slewing limiters with rubber damping elements are available for setting a defined slewing range.




Telescopic version

To bypass interfering edges or contours, the slewing cranes can be equipped with a telescopic jib.



Cantilever version

For low room heights, the jibs can be manufactured with a lower cantilever arm, increasing the usable height of the jib.



Double joint

Using a double joint, the slewing angle can be increased to nearly 360° when mounted on a column.



Double jib

Using a double joint, the slewing angle can be increased to nearly 360°.

Wall-mounted slewing crane WSK

Radial transport up to 180°

Structure and application

Wall-mounted slewing cranes can be easily bolted or clamped to walls or existing substructures. Their robust and smooth-running bearing system provides 180° coverage of the working area with minimal effort, reducing operator strain during daily tasks. A wide range of options ensures optimal adaptation to your individual requirements, further increasing the efficiency of the crane systems.

- Robust steel console with high-quality slide bearings
- Direct mounting to walls without intermediate console
- Optional: Slewing limiter for adapting to work areas
- Optional: Electric slewing drive
- Lightweight and ergonomic operation due to low dead weight
- Suitable for electric chain hoists and vacuum tube lifters



WSK-2500-45KG

With clamping console on an T-beam.



WSK-KA-125KG

With cantilever version for low overall height.



WSK-5000-100KG

Clamped to a hall column in the packaging area.




WSK-3000-150KG

In the assembly area of a component manufacturing line.

Wall-mounted slewing crane WSK

Technical data

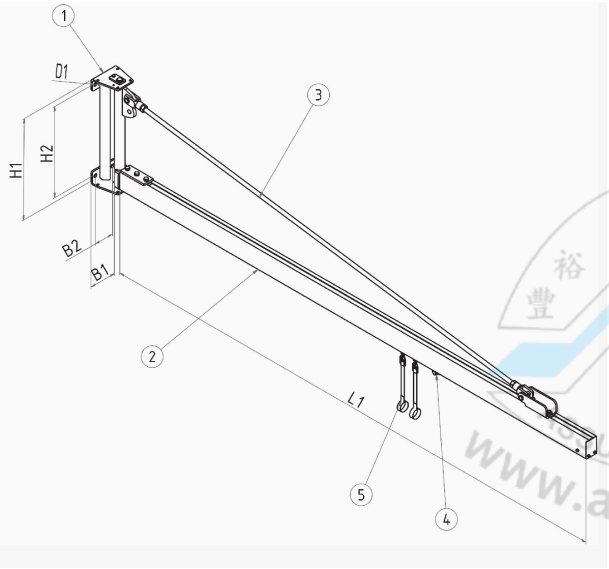

1 Slewing console with high-quality slide bearings and anchoring holes

2 Smooth-running aluminium jib

3 1–3 tie rods, depending on jib length

4 Trolley

5 Cable or hose trolley

Load capacity (kg)	Type	Jib L1 (mm)	Slewing range (°)	H1 (mm)	H2 (mm)	B1 (mm)	B2 (mm)	Quantity x D1 (mm)	Dead weight (kg)
60	WSK- ... -60KG	2.000-6.000	180	590-680	510-600	150	110	4 x 18	25 - 75
85	WSK- ... -85KG	2.000-6.000	180	590-680	510-600	150	110	4 x 18	30 - 80
125	WSK- ... -125KG	2.000-6.000	180	680-880	600-800	150	110	4 x 18	35 - 90
160	WSK- ... -160KG	2.000-6.000	180	680-880	600-800	150	110	4 x 18	40 - 95
250	WSK- ... -250KG	2.000-6.000	180	680-880	600-800	175	125	4 x 18	45 - 100
320	WSK- ... -320KG	2.000-6.000	180	880-1080	800-1.080	175	125	4 x 18	50 - 120
500	WSK- ... -500KG	2.000-6.000	180	1080-1280	1.080-1.280	175	125	4 x 22	55 - 160

Ceiling-mounted slewing crane DSK

Radial transport up to 270°

Structure and application

Ceiling-mounted slewing cranes offer the advantage of requiring no supports or walls, providing an unrestricted working area. Mounting is done using ceiling consoles that are adapted to your individual conditions. Thanks to the low dead weight of the aluminium design, effective and ergonomic operation is ensured, significantly reducing operator strain during daily work.

- Robust steel console with high-quality slide bearings
- Rotating crane design for 360° working area coverage
- Optional: Slewing limiter for adapting to work areas
- Lightweight and ergonomic operation due to low dead weight
- Suitable for electric chain hoists and vacuum tube lifters



DSK-4000-50KG

For moving underneath an existing crane runway.



DSK-3500-100KG

With a 360° slewing range for loading a CNC machine.




DSK-5000-50KG

With slewing limiter and balancer feed.

Ceiling-mounted slewing crane DSK

Technical data

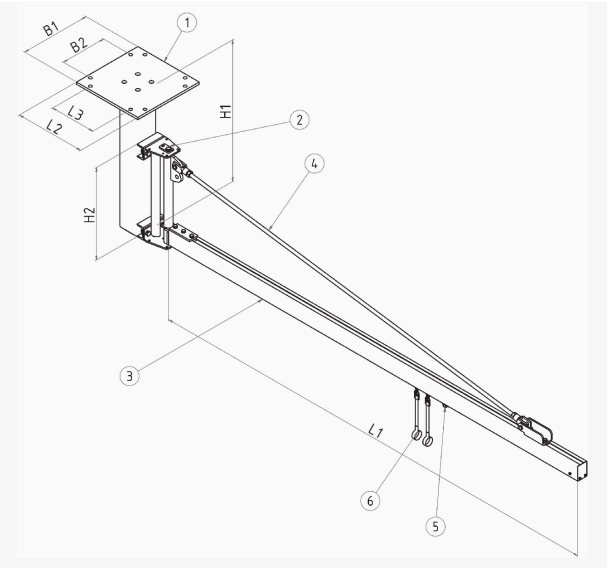

1. Intermediate console for ceiling mounting
2. Slewing console with high-quality slide bearings
3. Smooth-running aluminium jib
4. 1–3 tie rods, depending on jib length
5. Trolley
6. Cable or hose trolleys

Load capacity (kg)	Type	Jib L1 (mm)	Slewing range (°)	H1 (mm)	H2 (mm)	L2xB2 (mm)	L3xB3 (mm)	Quantity x D1 (mm)	Dead weight (kg)
60	DSK- ... -60KG	2.000-6.000	270	580-2.000	3100	400 x 400-500 x 500	320 x 320-420 x 420	4-6 x 18	100-130
85	DSK- ... -85KG	2.000-6.000	270	620-2.000	3100	400 x 400-500 x 500	320 x 320-420 x 420	4-6 x 18	120-150
125	DSK- ... -125KG	2.000-6.000	270	620-2.000	3100	400 x 400-500 x 500	320 x 320-420 x 420	6 x 18	160-260
160	DSK- ... -160KG	2.000-6.000	270	420-2.000	3100	500 x 500-600 x 600	420 x 420-520 x 520	6 x 18	180-280
250	DSK- ... -250KG	2.000-6.000	270	420-2.000	3100	500 x 500-600 x 600	420 x 420-520 x 520	6 x 18	200-320
320	DSK- ... -320KG	2.000-6.000	270	820-2.000	3100	500 x 500-600 x 600	420 x 420-520 x 520	6 x 18	260-340
500	DSK- ... -500KG	2.000-6.000	270	820-2.000	3100	600 x 600-800 x 800	520 x 520-720 x 720	6-8 x 18	300-420

Column-mounted slewing crane SSK

Radial transport up to 270°

Structure and application


Column-mounted slewing cranes are particularly suitable for work areas where no other mounting options for slewing cranes exist. The large base plates allow the columns to be easily anchored to the floor, covering working areas of up to 270°. The aluminium jibs, along with robust and smooth-running bearings, reduce operator strain and ensure efficient, ergonomic handling.

- Robust, large-dimensioned steel column
- Galvanized steel column up to 250 kg, painted for higher capacities
- Robust steel console with high-quality slide bearings
- Optional: Slewing limiter for adapting to work areas
- Lightweight and ergonomic operation due to low dead weight
- Suitable for electric chain hoists and vacuum tube lifters



SSK-4000-60KG

3 column-mounted slewing cranes for picking wooden panels.

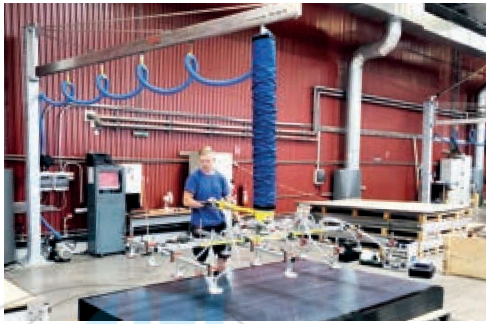

SSK-4000-80KG

With tube lifter for transferring plastic panels.



SSK-4000-100KG

For handling large cardboard boxes.




SSK-6000-500KG

With chain hoist for in-plant transport in final assembly.

Column-mounted slewing crane SSK

Technical data

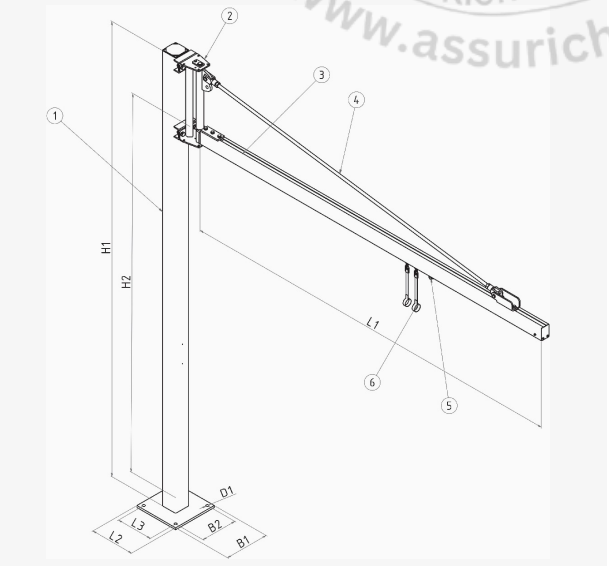

1. High-strength, low-vibration column with reinforced base plate
2. Slewing console with high-quality slide bearings
3. Smooth-running aluminium jib
4. 1–3 tie rods, depending on jib length
5. Trolley
6. Cable or hose trolley

Load capacity (kg)	Type	Jib L1 (mm)	Slewing range (°)	H1 (mm)	H2 (mm)	L2xB2 (mm)	L3xB3 (mm)	Quantity x D1 (mm)	Dead weight (kg)
85	SSK- ... -85KG	2.000 - 6.000	270	3.620-3.720	3100	400x400 - 500x500	320x320 - 420x420	4-6 x 18	140 - 170
50	SSK- ... -60KG	2.000 - 6.000	270	3.620-3.720	3100	400x400 - 500x500	320x320 - 420x420	4-6 x 18	120 - 150
125	SSK- ... -125KG	2.000 - 6.000	270	3.720-3.920	3100	400x400 - 500x500	320x320 - 420x420	6 x 18	200 - 300
160	SSK- ... -160KG	2.000 - 6.000	270	3.720-3.920	3100	500x500 - 600x600	420x420 - 520x520	6 x 18	220 - 350
250	SSK- ... -250KG	2.000 - 6.000	270	3.720-3.920	3100	500x500 - 600x600	420x420 - 520x520	6 x 18	240 - 380
320	SSK- ... -320KG	2.000 - 6.000	270	3.920-4.120	3100	500x500 - 600x600	420x420 - 520x520	6 x 18	380 - 490
500	SSK- ... -500KG	2.000 - 6.000	270	4.120-4.320	3100	600x600 - 800x800	520x520 - 720x720	6-8 x 18	520 - 670

Articulated slewing crane KSK

Radial transport up to 270°

Structure and application

Articulated jibs are characterized by their flexibility and compact design. Thanks to the double joint with independently movable arms, even the tightest spatial conditions can be covered and obstacles can be bypassed with ease. The smooth-running bearings with slide bushings ensure simple and ergonomic operation, significantly reducing operator strain and increasing both efficiency and workplace safety.

- Robust and compact steel structure
- Joint bearings with high-quality slide bushings
- Slewing stops with rubberized buffers
- Optional: Slewing limiter for adapting to work areas
- Lightweight and ergonomic operation due to low dead weight
- Version for wall mounting available
- Integrated vacuum supply when used with tube lifters



KSK-2500-2500-80KG

For loading a processing machine.



KSK-2000/2000-125KG

With mobile base plate and a vacuum tube lifter.



KSK-2500/2000-60KG

For dipping into a bagging system.




KSK-2500/2000-60KG

With vacuum tube lifter for bag handling.

Articulated slewing crane KSK

Technical data

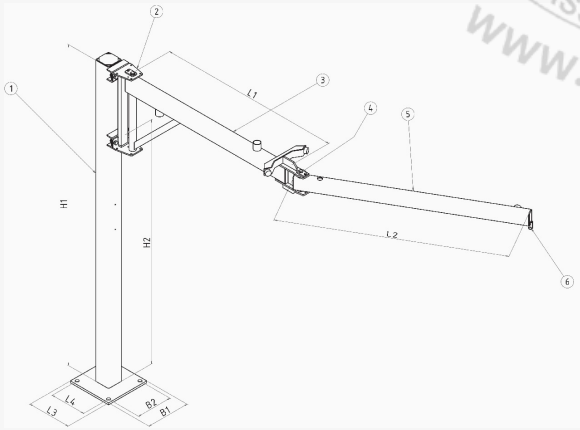

1. High-strength, low-vibration column with reinforced base plate
2. Slewing console with high-quality slide bearings
3. Smooth-running primary jib
4. Slewing joint with high-quality slide bearings
5. Articulated jib
6. Mounting interface for chain hoist or tube lifter

Load capacity (kg)	Type	Slewing range (°)	L1 (mm)	L2 (mm)	H1 (mm)	H2 (mm)	L3 (mm)	L4 (mm)	B1 (mm)	B2 (mm)	Quantity x D1 (mm)	Dead weight (kg)
50	KSK- ... -50KG	270/360	1.500-2.000	1.250-1.750	3.620-3.720	3100	500	400	420	320	4 x 18	145-155
85	KSK- ... -85KG	270/360	1.500-2.000	1.250-1.750	3.620-3.720	3100	500	400	420	320	4 x 18	150-160
125	KSK- ... -125KG	270/360	1.500-2.000	1.250-1.750	3.720-3.920	3100	500	400	420	320	6 x 18	155-170