VacuBoyMini VBM

The lightweight solution up to 350 kg

Structure and application

Due to its compact design and low dead weight, this vacuum lifter is suitable for smaller panels and self-supporting loads such as canisters, drums, and containers. Depending on the requirements, the device can be equipped with a single suction gripper or with attachments featuring two or four suction grippers. For different applications, the device can also be fitted with a quick-change coupling, allowing the grippers to be used as needed.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Optional quick-change coupling for various suction grippers
- Loading and unloading CNC machines with small parts
- Small, compact, and self-supporting workpieces
- Drums, crates, and containers
- Glass and window elements
- ACCU version for mains-independent operation



VacuBoyMini VBM-ACCU-75KG

For transporting truck tank containers using a dual-gripper attachment.



VacuBoyMini VBM-ACCU-125KG

With quadruple suction gripper for loading a CNC system.



VacuBoyMini VBM-ACCU-50KG

With articulated special grippers for transporting pipes with varying diameters.




VacuBoyMini VBM-125KG

Handling copper slit strips using a fourfold attachment.

VacuBoyMini VBM

Technical data

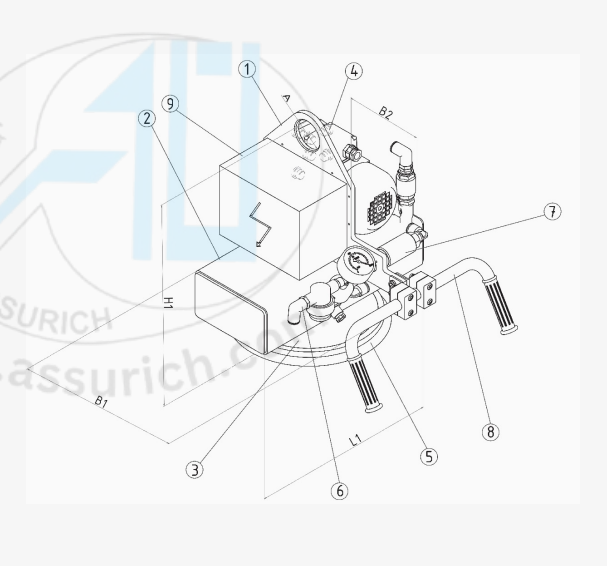

1. Suspension frame with lifting eye
2. Separate safety reservoir
3. Flange plate for suction grippers or attachments
4. Vacuum pump with check valve
5. Suction grippers or attachments
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic manipulation handle
9. Electronic warning device EW-0

load capacity (kg)	Type	workpiece dimensions min (mm)	workpiece dimensions max (mm)	vacuum pump (m^3/h)	number of suction grippers	L1 (mm)	B1 (mm)	B2 (mm)	H (mm)	A (mm)	dead weight (kg)
125	VBM-1	300 x 300	1.000 x 1.000	T4.8/TF4.2	1	250	250	270	450	60	22
	VBM-2	800 x 300	1.500 x 1.000	T4.8/TF4.2	2	800	250	270	550	60	25
	VBM-4	1.000 x 500	2.500 x 1.250	T4.8/TF4.2	4	800	400	270	550	60	30
250	VBM-1	400 x 400	1.000 x 1.000	T4.8/TF4.2	1	250	250	270	450	60	23
	VBM-2	1.000 x 400	1.500 x 1.000	T4.8/TF4.2	2	800	250	270	550	60	26
	VBM-4	1.000 x 600	2.500 x 1.250	T4.8/TF4.2	4	800	400	270	550	60	32
350	VBM-1	500 x 500	1.000 x 1.000	T4.8/TF4.2	1	250	250	270	450	60	24
	VBM-2	1.000 x 500	1.500 x 1.000	T4.8/TF4.2	2	800	250	270	550	60	28
	VBM-4	1.000 x 800	2.500 x 1.250	T4.8/TF4.2	4	800	400	270	550	60	36

VacuBoyVario VBV

The versatile one up to 500 kg

Structure and Application

A versatile vacuum lifter that can be used universally. By positioning the individual suction pads as required, workpieces can be transported both horizontally and vertically. In addition, loads lying flat can be tilted upright into a vertical position. Each suction pad is equipped with a manual slide valve and a vacuum gauge.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Horizontal and vertical handling depending on suction pad arrangement
- Positioning workpieces along longitudinal and transverse axes
- Suitable for smooth and textured surfaces
- Large-format panel materials of all kinds
- Furniture and containers
- "ACCU" version for mains-independent operation



VacuBoyVario VBV-125KG

Handling of window elements up to 4.000 mm in length.



VacuBoyVario VBV-250KG

Positioning of plastic panels with lengths of up to 8.000 mm.



VacuBoyVario VBV-25KG

Repositioning of furniture components in the motorhome industry..




VacuBoyVario VBV-125KG

Handling of fully pre-assembled furniture components during final assembly.

VacuBoyVario VBV

Technical data

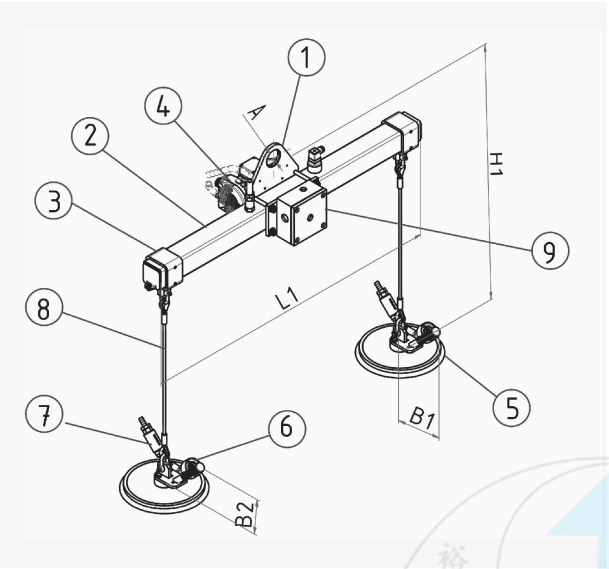

1. Suspension frame with lifting eye
2. Longitudinal beam with integrated safety reservoir
3. Mounting point for suction pad rope suspension
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Rope suspension with shackle
9. Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Number of suction pads	L1 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
125	VBV80-2	800 x 400	2.500 x 1.250	T 4.8	2	1.800	800	600	470	80	50
	VBV80-4	800 x 400	3.000 x 1.500	T 4.8	4	3.000	1.200	900	470	80	60
250	VBV80-2	800 x 400	2.500 x 1.250	T 4.8	2	1.800	800	600	470	80	60
	VBV80-4	800 x 400	3.000 x 1.500	T 4.8	4	3.000	1.200	900	470	80	70
500	VBV80-2	800 x 400	2.500 x 1.250	T 4.8	2	1.800	800	600	470	80	70
	VBV80-4	800 x 400	3.000 x 1.500	T 4.8	4	3.000	1.200	900	470	80	80

VacuBoyForker VBF

For lifting equipment and forklifts up to 1.000 kg

Structure and Application

A specially developed vacuum lifter designed for use on forklifts or pallet trucks. The vacuum lifter is mounted onto the forks of the lifting device using fork shoes and fixed screw connections. Power is supplied either autonomously via batteries or through the base unit. Operation is carried out via a pendant control with spiral cable, which includes all functions.

- Power supply via forklift or pallet truck
- Acoustic warning device with power-failure alert
- Optional self-contained power supply via battery
- Horizontal transport of panel-shaped materials
- Suitable for smooth and textured surfaces
- Tiltable and rotatable versions available on request
- "BATT" and "ACCU" versions for mains-independent operation



VacuBoyForker VBF-250KG-ACCU

For large-format plastic panels up to 3.000 × 1.500 mm.



VacuBoyForker VB-250KG

For repositioning steel sheets.



VacuBoyForker VBF-1000KG

For lifting and transporting aluminium plates with thicknesses of up to 300 mm.




VacuBoyForker VBF-250KG-BATT

With self-contained batteries for picking large-format metal sheets.

VacuBoyForker VBF

Technical data

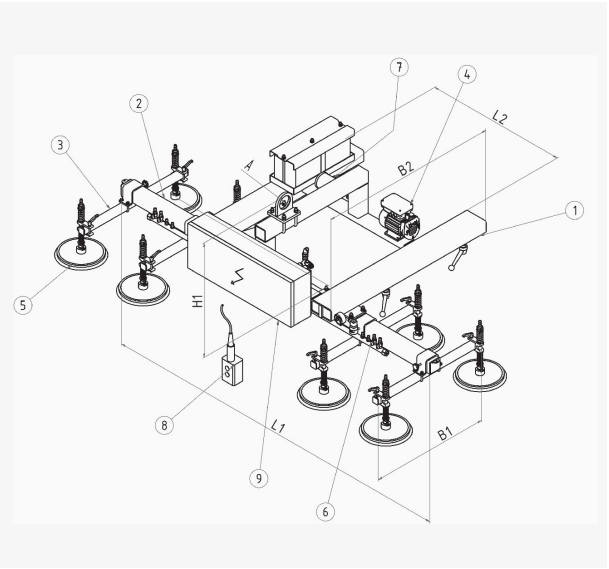

1. Suspension frame with forklift shoes and battery pack, optionally with swivel drives
2. Longitudinal beam with integrated safety reservoir
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Control unit with pendant control and spiral cable
9.

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Number of suction pads	L1 (mm)	B1 (mm)	B2 (mm)	H (mm)	A (mm)	Dead weight (kg)
125	VBF80	1.000 x 1.000	2.000 x 1.000	TF 4.4	4	1.800	800	600	470	80	225
		2.000 x 1.000	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	470	80	250
250	VBF80	1.000 x 1.000	2.000 x 1.000	TF 4.4	4	1.800	800	600	470	80	250
		2.000 x 1.000	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	470	80	275
500	VBF80	1.000 x 1.000	2.000 x 1.000	TF 4.4	4	1.800	800	600	470	80	275
		2.000 x 1.000	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	470	80	300
750	VBF100	2.000 x 1.000	2.500 x 1.250	TF 4.4	4	1.800	800	600	570	100	350
		2.500 x 1.250	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	570	100	375
1.000	VBF100	2.000 x 1.000	2.500 x 1.250	TF 4.4	8	1.800	800	600	570	100	375

VacuBoy VB

Horizontal handling up to 2.000 kg

Structure and Application

The VacuBoy device series is suitable for the horizontal transport of vacuum-tight panels of all kinds. These units are primarily used for loading and unloading CNC machines, as well as for restacking and order picking. Operation is carried out via an ergonomically designed control handle that includes all necessary functions. A wide range of options and special equipment allows for optimal adaptation to your specific requirements.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Horizontal transport of vacuum-tight materials
- Suitable for smooth and textured surfaces
- Loading and unloading of CNC machining centres
- Stacking, repositioning and order picking of panel materials
- "ACCU" version for mains-independent operation up to 1.000 kg



VacuBoy VB-500KG

When loading a CNC machine.



VacuBoy VB-750KG

Handling of large-format metal sheets.



VacuBoy VB-250KG

Handling of wet stone slabs.




VacuBoy VB-1000KG

Picking of steel sheets.

VacuBoy VB

Technical data

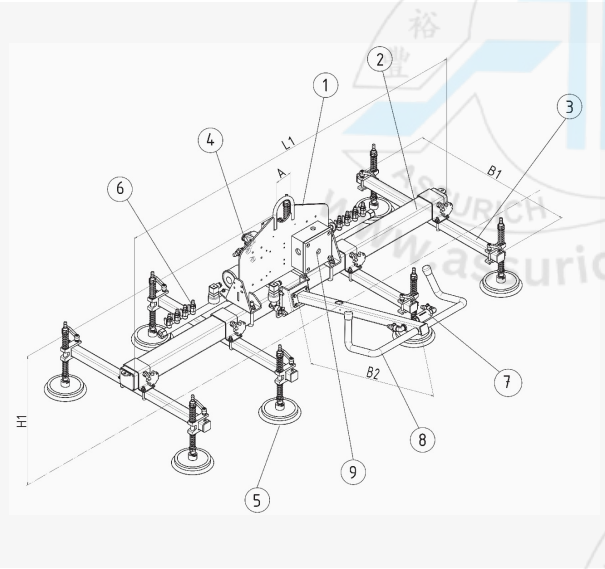

1 Suspension frame with lifting eye

2 Longitudinal beam with integrated safety reservoir

3 Transverse beam, adjustable and lockable

4 Vacuum pump with check valve

5 Adjustable and lockable suction pads

6 Distribution line with vacuum filter and visual control vacuum gauge

7 Vacuum valve for suction/release

8 Ergonomic control handle

9 Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum pump	Number of suction pads	L1	B1	B2	H1	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
125	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	65
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	75
250	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	70
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	80
500	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	75
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	85
750	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	4	1.800	800	600	570	100	90
		2.500 x 1.250	4.000 x 2.000	T 4.8	8	3.000	1.200	900	570	100	110
1.000	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	8	1.800	800	600	570	100	120
		2.500 x 1.250	4.000 x 2.000	T 4.8	12	3.000	1.200	900	570	100	130
1.250	VB100	2.000 x 1.000	2.500 x 1.250	T 4.16	8	1.800	800	600	570	100	130
		2.500 x 1.250	4.000 x 2.000	T 4.16	12	3.000	1.200	900	570	100	150
1.500	VB100	2.000 x 1.000	2.500 x 1.250	T 4.16	8	1.800	800	600	570	100	150
		2.500 x 1.250	4.000 x 2.000	T 4.16	12	3.000	1.200	900	570	100	160
2.000	VB100	2.000 x 1.000	2.500 x 1.250	T 4.16	12	1.800	800	600	570	100	280
		2.500 x 1.250	4.000 x 2.000	T 4.16	12	3.000	1.200	900	570	100	220

VacuBoy VB-VERT

Vertical handling up to 1.000 kg

Structure and Application

A vacuum lifter designed exclusively for the vertical repositioning of upright panels. This allows operators to work with vertical panel racking systems and easily remove or return panels. The devices are also suitable for assembly tasks where workpieces must be installed in an upright position – for example, during window installation.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Handling of upright loads in racking systems
- "ACCU" version for mains-independent operation



VacuBoy VB-VERT-125KG

For installing front glass panes.




VacuBoy VB-VERT-250KG

For final assembly of rear panels in the motorhome industry.

VacuBoy VB-VERT

Technical data

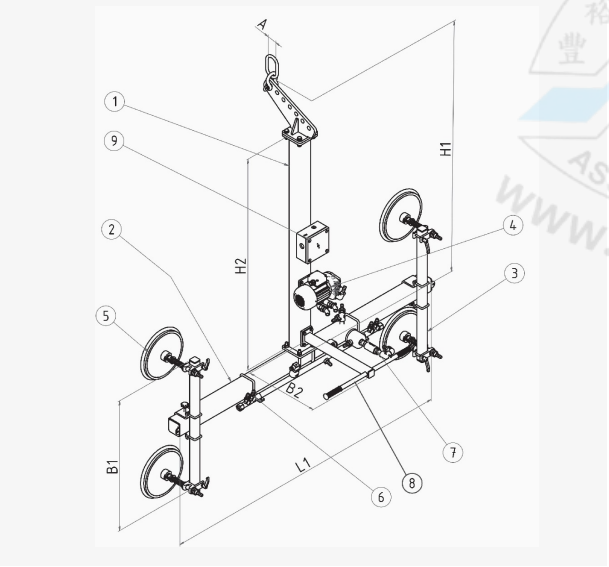

1. Suspension frame with lifting eye and swivel unit
2. Longitudinal beam with integrated safety reservoir
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Number of suction pads	L1 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	A (mm)	Dead weight (kg)
125	VB-VERT-2	1.000 x 1.000	2.000 x 1.000	T 4.8	2 x 230	1.800	800	250	1.000	750	400	80	85
	VB-VERT-4	2.000 x 1.000	4.000 x 2.000	T 4.8	4 x 170	2.000	1.200	250	1.500	1.250	600	80	90
250	VB-VERT-2	1.000 x 1.000	2.000 x 1.000	T 4.8	2 x 360	1.800	800	250	1.000	750	400	80	90
	VB-VERT-4	2.000 x 1.000	4.000 x 2.000	T 4.8	4 x 230	2.000	1.200	250	1.500	1.250	600	80	95
500	VB-VERT-4	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 360	1.800	800	250	1.000	750	400	80	100
	VB-VERT-8	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 290	2.000	1.200	250	1.500	1.250	600	80	110
750	VB-VERT-4	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 450	1.800	800	250	1.000	750	400	80	150
	VB-VERT-8	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 360	2.000	1.200	250	1.500	1.250	600	80	175
1.000	VB-VERT-4	1.250 x 1.250	2.000 x 1.250	T 4.8	4 x 540	1.800	800	250	1.000	750	400	80	200
	VB-VERT-8	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 360	2.000	1.200	250	1.500	1.250	600	80	250

VacuBoy VB-VERT-180(E)

Vertical tilting up to 1.000 kg

Structure and Application

A vertical vacuum lifter with an integrated rotation axis for turning lifted loads by ±90°. This allows glass panes, window elements, and other panel materials to be positioned in the required installation or assembly orientation. The devices are available with a manual or electric rotation axis.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Handling of glass and window elements
- Precise rotation for assembly work
- "ACCU" version for mains-independent operation



VacuBoy VB-VERT-180-125KG

Handling of window elements during pre-assembly.



VacuBoy VB-VERT-180E-250KG

With electric rotation drive in the production of multi-glazed window panes.




VacuBoy VB-VERT-180-125KG

Handling of window elements in the manufacturing process.

VacuBoy VB-VERT-180(E)

Technical data

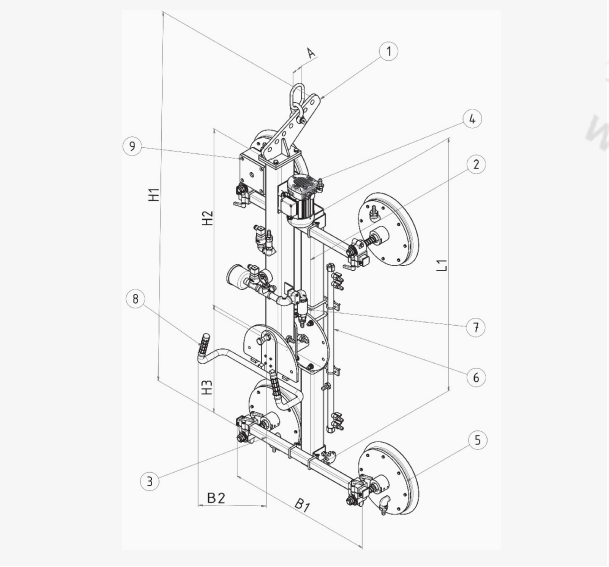

1. Suspension frame with lifting eye and swivel unit
2. Longitudinal beam with integrated safety reservoir
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum pump	Number of suction pads	L1	B1	B2	H1	H2	H3	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
125	VB-VERT-180	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 170	1.800	800	250	2.300	1.400	900	80	125
	VB-VERT-180	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 120	3.000	1.200	250	3.500	2.000	1.500	80	150
	VB-VERT-180E	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 170	1.800	800	250	2.300	1.400	900	80	200
	VB-VERT-180E	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 120	3.000	1.200	250	3.500	2.000	1.500	80	225
250	VB-VERT-180	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 230	1.800	800	250	2.300	1.400	900	80	150
	VB-VERT-180	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 170	3.000	1.200	250	3.500	2.000	1.500	80	175
	VB-VERT-180E	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 230	1.800	800	250	2.300	1.400	900	80	200
	VB-VERT-180E	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 170	3.000	1.200	250	3.500	2.000	1.500	80	225
500	VB-VERT-180E	2.000 x 1.000	2.500 x 1.250	T 4.8	4 x 360	1.800	800	250	2.300	1.400	900	80	225
	VB-VERT-180E	2.500 x 1.250	4.000 x 2.000	T 4.8	8 x 290	3.000	1.200	250	3.500	2.000	1.500	80	250
750	VB-VERT-180E	2.000 x 1.000	2.500 x 1.250	T 4.8	4 x 450	1.800	800	250	2.300	1.400	900	100	250
	VB-VERT-180E	2.500 x 1.250	4.000 x 2.000	T 4.8	8 x 340	3.000	1.200	250	3.500	2.000	1.500	100	275
1.000	VB-VERT-180E	2.000 x 1.000	2.500 x 1.250	T 4.8	4 x 540	1.800	800	250	2.300	1.400	900	100	275
	VB-VERT-180E	2.500 x 1.250	4.000 x 2.000	T 4.8	8 x 360	3.000	1.200	250	3.500	2.000	1.500	100	300

VacuBoy VB-90E

Tilting up to 1.500 kg

Structure and Application

These vacuum lifters are used wherever vacuum-tight panels of any kind need to be raised upright or tilted. They are particularly suitable for upright machining centres or panel storage systems, as well as for restacking and repositioning tasks. Operation is carried out via an ergonomically designed control handle that includes all necessary functions. A wide range of options and special equipment allows optimal adaptation to your requirements.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Stepless tilting of vacuum-tight materials
- Tilting time approx. 15–30 s
- Suitable for smooth and textured surfaces
- Loading and unloading of CNC machining centres
- Stacking, repositioning and order picking of panel materials
- "ACCU" version for mains-independent operation up to 1.000 kg



VacuBoy VB-90E-ACCU-125KG

With a double-jointed control handle for installing machine doors on CNC lathes.



VacuBoy VB-90E-125KG

Tilting motorhome front components.




VacuBoy VB-90E-250KG

For large-format steel plates up to 4.000 × 2.000 mm.

VacuBoy VB-90E

Technical data

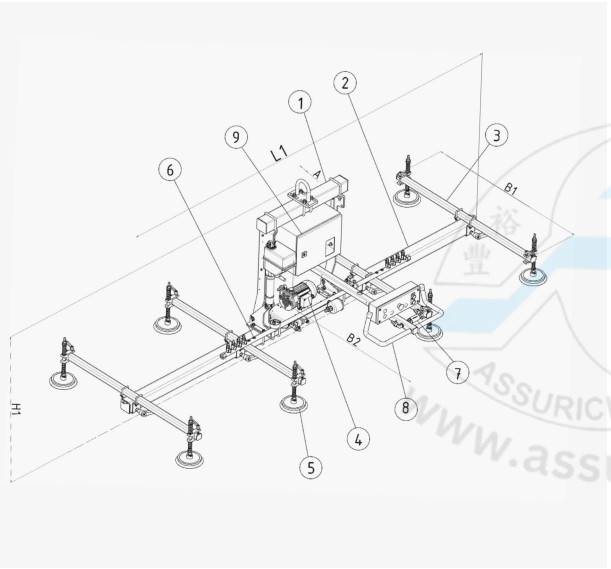

1. Suspension frame with tilting cylinder or tilting gearbox and lifting eye
2. Longitudinal beam with integrated safety reservoir
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Number of suction pads	L1 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
125	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	140
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	160
250	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	150
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	170
500	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	160
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	180
750	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	4	1.800	800	600	570	100	200
		2.500 x 1.250	4.000 x 2.000	T 4.8	8	3.000	1.200	900	570	100	220
1.000	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	8	1.800	800	600	570	100	250
		2.500 x 1.250	4.000 x 2.000	T 4.8	12	3.000	1.200	900	570	100	275
1.250	VB100	2.000 x 1.000	2.500 x 1.250	T 4.16	8	1.800	800	600	570	100	375
		2.500 x 1.250	4.000 x 2.000	T 4.16	12	3.000	1.200	900	570	100	425
1.500	VB100	2.000 x 1.000	2.500 x 1.250	T 4.16	8	1.800	800	600	570	100	450
		2.500 x 1.250	4.000 x 2.000	T 4.16	12	3.000	1.200	900	570	100	500

VacuBoy VB-90E-180(E)

Tilting and rotating up to 1.000 kg

Structure and Application

A vacuum lifter with an integrated rotation axis and tilting function. This allows loads to be picked up both vertically and horizontally and tilted or rotated into any required position. Tilting is carried out electrically, while rotation – depending on the load capacity – is either manual or also electric. Operation is performed via the ergonomically positioned control handle.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Handling of glass and window elements
- Precise rotation for assembly work
- "ACCU" version for mains-independent operation



VacuBoy VB-90E-180E-250KG

Electric tilting and rotation drive for handling panel materials.



VacuBoy VB-90E-180-125KG

With electric tilting drive and manual rotation unit in the production of window and door elements.




VacuBoy VB-90E-180E-500KG

With electric tilting and rotation drive for handling window elements.

VacuBoy VB-90E-180(E)

Technical data

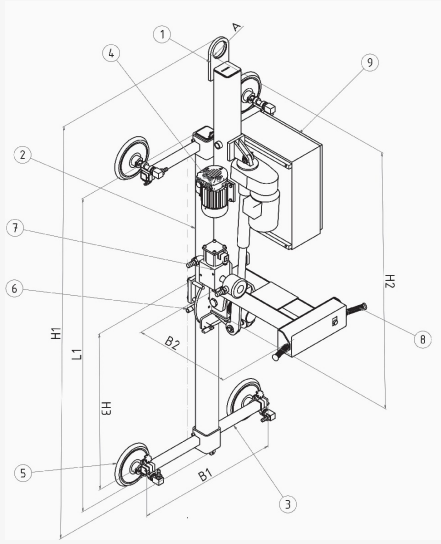

1. Suspension frame with lifting eye and rotation/tilting unit
2. Longitudinal beam with integrated safety reservoir
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Number of suction pads	L1 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	A00 (mm)	Dead weight (kg)
125	VBW-90E-180	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 170	1.800	800	600	1.550	1.250	900	80	200
	VBW-90E-180	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 120	3.000	1.200	900	2.050	1.750	1.500	80	225
	VBW-90E-180E	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 170	1.800	800	600	1.550	1.250	900	80	325
	VBW-90E-180E	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 120	3.000	1.200	900	2.050	1.750	1.500	80	350
250	VBW-90E-180	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 230	1.800	800	600	1.550	1.250	900	80	225
	VBW-90E-180	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 170	3.000	1.200	900	2.050	1.750	1.500	80	250
	VBW-90E-180E	1.000 x 1.000	2.000 x 1.000	T 4.8	4 x 230	1.800	800	600	1.550	1.250	900	80	350
	VBW-90E-180E	2.000 x 1.000	4.000 x 2.000	T 4.8	8 x 170	3.000	1.200	900	2.050	1.750	1.500	80	375
500	VBW-90E-180E	2.000 x 1.000	2.500 x 1.250	T 4.8	4 x 360	1.800	800	600	1.550	1.250	900	80	375
	VBW-90E-180E	2.500 x 1.250	4.000 x 2.000	T 4.8	8 x 290	1.800	1.200	900	2.050	1.750	1.500	80	375
750	VBW-90E-180E	2.000 x 1.000	2.500 x 1.250	T 4.8	4 x 450	1.800	800	600	1.550	1.250	900	100	450
	VBW-90E-180E	2.500 x 1.250	4.000 x 2.000	T 4.8	8 x 340	1.800	1.200	900	2.050	1.750	1.500	100	450
1.000	VBW-90E-180E	2.000 x 1.000	2.500 x 1.250	T 4.8	4 x 540	1.800	800	600	1.550	1.250	900	100	500
	VBW-90E-180E	2.500 x 1.250	4.000 x 2.000	T 4.8	8 x 360	1.800	1.200	900	2.050	1.750	1.500	100	550

VacuBoy VB-180E
Turning up to 1.500 kg

Structure and Application

These vacuum lifters are equipped with a synchronised tilting gear motor and are particularly suitable for assisting in the assembly of heavy panels or for inspection stations where materials need to be examined from both sides. Operation is carried out via an ergonomically designed control handle that includes all necessary functions. A wide range of options and special equipment allows optimal adaptation to your requirements.

- Stepless turning of vacuum-tight materials
- Acoustic warning device with power-failure alert
- Synchronised tilting gear motors with a turning time of 30–45 s
- Suitable for smooth and textured surfaces
- Double-sided surface processing of workpieces
- Double-sided visual inspection of sensitive workpieces



VacuBoy VB-180E-250KG

Turning of bent steel plates.



VacuBoy VB-180E-500KG

For large-format steel plates up to 4.000 × 2.000 mm.



VacuBoy VB-180E-50KG


In low-profile design with rack-and-pinion system for glass panes.



VacuBoy VB-180E-250KG

For turning and as an assembly aid for rear components of motorhomes.

VacuBoy VB-180E
Technical data

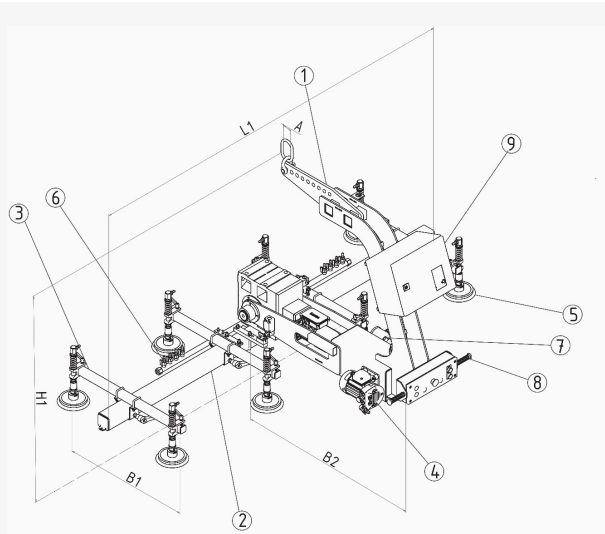

1. Suspension frame with synchronised tilting gear motor and lifting eye
2. Longitudinal beam with integrated safety reservoir
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum pump	Number of suction pads	L1	B1	B2	H	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
125	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	200
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	250
250	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	250
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	300
500	VB80	1.000 x 1.000	2.000 x 1.000	T 4.8	4	1.800	800	600	470	80	300
		2.000 x 1.000	4.000 x 2.000	T 4.8	8	3.000	1.200	900	470	80	350
750	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	4	1.800	800	600	570	100	350
		2.500 x 1.250	4.000 x 2.000	T 4.8	8	3.000	1.200	900	570	100	400
1.000	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	8	1.800	800	600	570	100	400
		2.500 x 1.250	4.000 x 2.000	T 4.8	12	3.000	1.200	900	570	100	500
1.250	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	8	1.800	800	600	570	100	500
		2.500 x 1.250	4.000 x 2.000	T 4.8	12	3.000	1.200	900	570	100	600
1.500	VB100	2.000 x 1.000	2.500 x 1.250	T 4.8	8	1.800	800	600	570	100	600
		2.500 x 1.250	4.000 x 2.000	T 4.8	12	3.000	1.200	900	570	100	700

VacuBoySystem VBS

For large-format panels up to 6.000 kg

Structure and Application

These robust vacuum lifters are designed for the horizontal transport of large-format, vacuum-tight materials of all kinds. Thanks to their modular design, they can be easily adapted to existing requirements, ensuring an efficient and safe workflow. Control is carried out either via an ergonomically positioned control handle, a pendant control, or remote control.

- Weight-optimized support structure
- Acoustic warning device with power-failure alert
- Large-format, vacuum-tight panels up to 12.000 mm
- Suitable for smooth and textured surfaces
- Manually telescopic versions
- Stacking, repositioning and order picking of panel materials



VacuBoySystem VBS-500kg

Transport of large-format aluminium panels up to 10.000 × 3.000 mm.



VacuBoySystem VBS-2500kg

With 4-point suspension for sheets up to 8.000 × 2.500 × 30 mm.



VacuBoySystem VBS-500kg

In low-profile design with fold-in underrun supports as a safety feature for transport over personnel.




VacuBoySystem VBS-1000kg-TEL

With telescopic longitudinal beams ranging from 6.000 to 10.000 mm.

VacuBoySystem VBS

Technical data

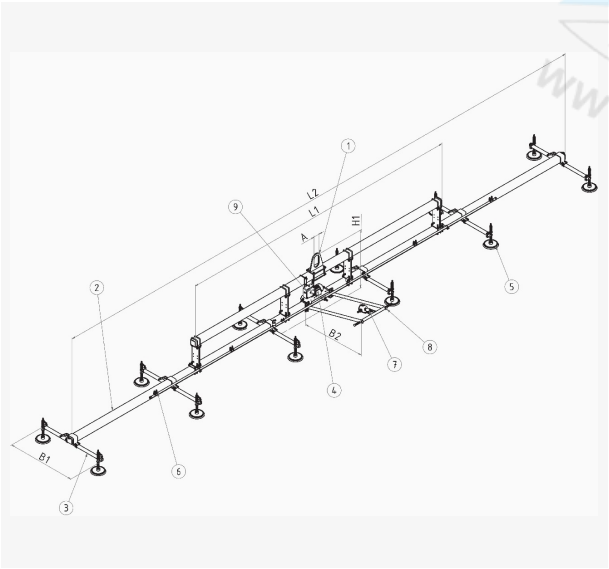

1 Suspension beam with 1-point or 2-point attachment

2 Longitudinal beam with integrated safety reservoir, optionally in telescopic design

3 Transverse beam, adjustable and lockable

4 Vacuum pump with check valve

5 Adjustable and lockable suction pads

6 Distribution line with vacuum filter and visual control vacuum gauge

7 Vacuum valve for suction/release

8 Ergonomic control handle

9 Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum pump	Number of suction pads	Number of lifting eyes	L1	L2	B1	B2	H1	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)			(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
500	VBS80	4.000 x 1.000	6.000 x 2.000	T 4.8	8	1	3.000	5.000	1.200	900	850	100	350
		4.000 x 1.000	12.000 x 3.000	T 4.8	12	2	6.000	10.000	1.800	1.200	850	100	400
1.000	VBS100	4.000 x 1.000	6.000 x 2.000	T 4.8	8	1	3.000	5.000	1.200	900	950	100	400
		4.000 x 1.000	12.000 x 3.000	T 4.8	12	2	6.000	10.000	1.800	1.200	950	100	450
2.000	VBS100	4.000 x 1.000	6.000 x 2.000	T 4.16	8	1	3.000	5.000	1.200	900	950	100	450
		4.000 x 1.000	12.000 x 3.000	T 4.16	12	2	6.000	10.000	1.800	1.200	950	100	500
3.000	VBS120	4.000 x 1.000	6.000 x 2.000	T 4.25	12	1	3.000	5.000	1.200	900	1050	120	800
		4.000 x 1.000	12.000 x 3.000	T 4.25	16	2	6.000	10.000	1.800	1.200	1050	120	900
4.000	VBS120	4.000 x 1.000	6.000 x 2.000	T 4.25	12	1	3.000	5.000	1.200	900	1050	120	850
		4.000 x 1.000	12.000 x 3.000	T 4.25	16	2	6.000	10.000	1.800	1.200	1050	120	950
5.000	VBS140	4.000 x 1.000	6.000 x 2.000	T 4.40	12	1	3.000	5.000	1.200	900	1150	140	1.200
		4.000 x 1.000	12.000 x 3.000	T 4.40	16	2	6.000	10.000	1.800	1.200	1150	140	1.400
6.000	VBS140	4.000 x 1.000	6.000 x 2.000	T 4.40	12	1	3.000	5.000	1.200	900	1150	140	1.400
		4.000 x 1.000	12.000 x 3.000	T 4.40	16	2	6.000	10.000	1.800	1.200	1150	140	1.600

VacuBoySystem VBS-90E

Tilting large-format panels up to 3.000 kg

Structure and Application

The tilting version is used wherever large-format panels need to be raised into an upright position or picked up vertically and placed horizontally. Robust and durable tilting drives enable stepless tilting and freely selectable holding positions. Thanks to the modular design, the vacuum lifters can be individually configured to ensure maximum productivity. Control is carried out either via an ergonomically positioned control handle, a pendant control, or remote control.

- Weight-optimized support structure
- Acoustic warning device with power-failure alert
- Large-scale tilting drives with 15–25 s tilting time
- Großflächige, vakuumdichte Platten bis 12.000 mm
- Suitable for smooth and textured surfaces
- Manually telescopic versions
- Stacking, repositioning and order picking of panel materials
- Assembly assistance in container or truck construction



VacuboySystem VBS-90E-2.500kg-TEL

Telescopic version for lengths from 6.000–12.000 mm.



VacuboySystem VBS-90E-1.000kg

For assembly support of truck side panels up to 12.000 mm in length.



VacuboySystem VBS-90E-750kg-TEL

For sandwich elements with lengths from 6.000–10.000 mm.




VacuBoySystem VBS-90E-1500KG

For tilting coated panels.

VacuBoySystem VBS-90E

Technical data

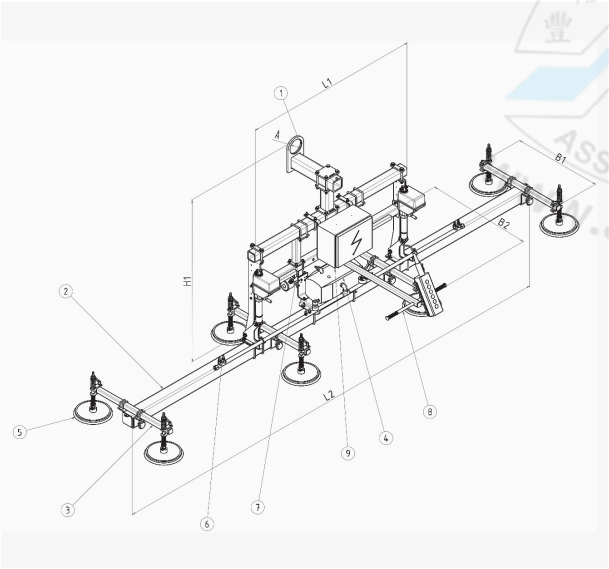

1. Suspension beam with tilting drives and 1-point or 2-point attachment
2. Longitudinal beam with integrated safety reservoir, optionally in telescopic design
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Number of suction pads	Number ofLifting eyes	L1 (mm)	L2 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
500	VBS80-90E	4.000 x 1.000	6.000 x 2.000	T 4.8	8	1	3.000	5.000	1.200	900	1.100	100	300
		4.000 x 1.000	12.000 x 3.000	T 4.8	12	2	6.000	10.000	1.800	1.200	1.100	100	350
1.000	VBS100-90E	4.000 x 1.000	6.000 x 3.000	T 4.8	8	1	3.000	5.000	1.200	900	1.100	100	500
		4.000 x 1.000	12.000 x 2.000	T 4.8	12	2	6.000	10.000	1.800	1.200	1.100	100	600
1.500	VBS120-90E	4.000 x 1.000	6.000 x 3.000	T 4.16	8	1	3.000	5.000	1.200	900	1.100	100	900
		4.000 x 1.000	12.000 x 3.000	T 4.16	12	2	6.000	10.000	1.800	1.200	1.100	100	1.000
2.000	VBS120-90E	4.000 x 1.000	6.000 x 3.000	T 4.16	8	1	3.000	5.000	1.200	900	1.100	100	1.250
		4.000 x 1.000	12.000 x 2.000	T 4.16	12	2	6.000	10.000	1.800	1.200	1.100	100	1.500
2.500	VBS140-90E	4.000 x 1.000	6.000 x 3.000	T 4.25	12	1	3.000	5.000	1.200	900	1.200	120	1.500
		4.000 x 1.000	12.000 x 3.000	T 4.25	16	2	6.000	10.000	1.800	1.200	1.200	120	1.750
3.000	VBS140-90E	4.000 x 1.000	6.000 x 3.000	T 4.25	12	1	3.000	5.000	1.200	900	1.200	120	1.750
		4.000 x 1.000	12.000 x 3.000	T 4.25	16	2	6.000	10.000	1.800	1.200	1.200	120	2.000