VacuBoyMini VBM

The lightweight solution up to 350 kg

Structure and application

Due to its compact design and low dead weight, this vacuum lifter is suitable for smaller panels and self-supporting loads such as canisters, drums, and containers. Depending on the requirements, the device can be equipped with a single suction gripper or with attachments featuring two or four suction grippers. For different applications, the device can also be fitted with a quick-change coupling, allowing the grippers to be used as needed.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Optional quick-change coupling for various suction grippers
- Loading and unloading CNC machines with small parts
- Small, compact, and self-supporting workpieces
- Drums, crates, and containers
- Glass and window elements
- ACCU version for mains-independent operation



VacuBoyMini VBM-ACCU-75KG

For transporting truck tank containers using a dual-gripper attachment.



VacuBoyMini VBM-ACCU-125KG

With quadruple suction gripper for loading a CNC system.



VacuBoyMini VBM-ACCU-50KG

With articulated special grippers for transporting pipes with varying diameters.




VacuBoyMini VBM-125KG

Handling copper slit strips using a fourfold attachment.

VacuBoyMini VBM

Technical data

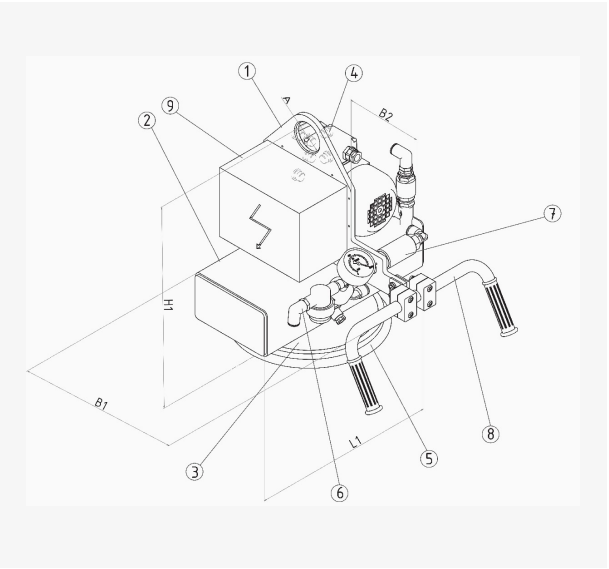

1 Suspension frame with lifting eye

2 Separate safety reservoir

3 Flange plate for suction grippers or attachments

4 Vacuum pump with check valve

5 Suction grippers or attachments

6 Distribution line with vacuum filter and visual control vacuum gauge

7 Vacuum valve for suction/release

8 Ergonomic manipulation handle

9 Electronic warning device EW-0

load capacity	Type	workpiece dimensions		vacuum pump	number of suction grippers	L1	B1	B2	H	A	dead weight
(kg)		min (mm)	max (mm)	(m^3/h)		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
125	VBM-1	300 x 300	1.000 x 1.000	T4.8/TF4.2	1	250	250	270	450	60	22
	VBM-2	800 x 300	1.500 x 1.000	T4.8/TF4.2	2	800	250	270	550	60	25
	VBM-4	1.000 x 500	2.500 x 1.250	T4.8/TF4.2	4	800	400	270	550	60	30
250	VBM-1	400 x 400	1.000 x 1.000	T4.8/TF4.2	1	250	250	270	450	60	23
	VBM-2	1.000 x 400	1.500 x 1.000	T4.8/TF4.2	2	800	250	270	550	60	26
	VBM-4	1.000 x 600	2.500 x 1.250	T4.8/TF4.2	4	800	400	270	550	60	32
350	VBM-1	500 x 500	1.000 x 1.000	T4.8/TF4.2	1	250	250	270	450	60	24
	VBM-2	1.000 x 500	1.500 x 1.000	T4.8/TF4.2	2	800	250	270	550	60	28
	VBM-4	1.000 x 800	2.500 x 1.250	T4.8/TF4.2	4	800	400	270	550	60	36