VacuBoyVario VBV
The versatile one up to 500 kg

Structure and Application

A versatile vacuum lifter that can be used universally. By positioning the individual suction pads as required, workpieces can be transported both horizontally and vertically. In addition, loads lying flat can be tilted upright into a vertical position. Each suction pad is equipped with a manual slide valve and a vacuum gauge.

- Power supply via cable with CEE plug
- Acoustic warning device with power-failure alert
- Horizontal and vertical handling depending on suction pad arrangement
- Positioning workpieces along longitudinal and transverse axes
- Suitable for smooth and textured surfaces
- Large-format panel materials of all kinds
- Furniture and containers
- "ACCU" version for mains-independent operation



VacuBoyVario VBV-125KG

Handling of window elements up to 4.000 mm in length.



VacuBoyVario VBV-250KG

Positioning of plastic panels with lengths of up to 8.000 mm.



VacuBoyVario VBV-25KG


Repositioning of furniture components in the motorhome industry..



VacuBoyVario VBV-125KG

Handling of fully pre-assembled furniture components during final assembly.

VacuBoyVario VBV
Technical data

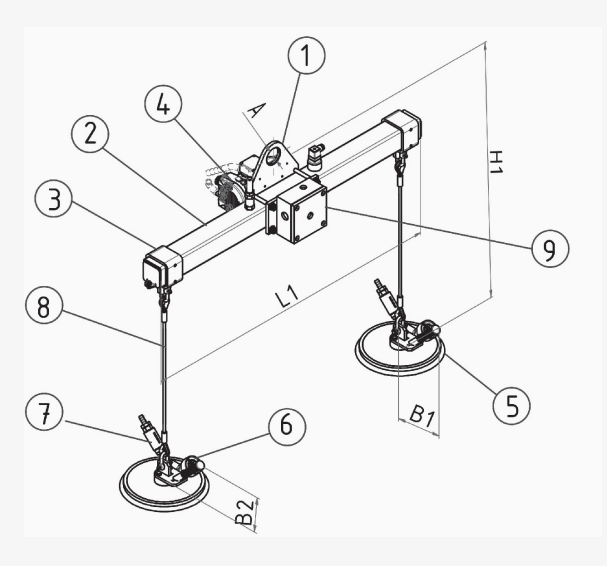

1. Suspension frame with lifting eye
2. Longitudinal beam with integrated safety reservoir
3. Mounting point for suction pad rope suspension
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Rope suspension with shackle
9. Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum pump	Number of suction pads	L1	B1	B2	H1	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
125	VBV80-2	800 x 400	2.500 x 1.250	T 4.8	2	1.800	800	600	470	80	50
	VBV80-4	800 x 400	3.000 x 1.500	T 4.8	4	3.000	1.200	900	470	80	60
250	VBV80-2	800 x 400	2.500 x 1.250	T 4.8	2	1.800	800	600	470	80	60
	VBV80-4	800 x 400	3.000 x 1.500	T 4.8	4	3.000	1.200	900	470	80	70
500	VBV80-2	800 x 400	2.500 x 1.250	T 4.8	2	1.800	800	600	470	80	70
	VBV80-4	800 x 400	3.000 x 1.500	T 4.8	4	3.000	1.200	900	470	80	80