VacuCoil VC

Horizontal transport of slit strip rings and coils up to 5.000 kg

Structure and Application

A vacuum lifter individually tailored to your requirements for repositioning, order picking or transferring slit strips. The vacuum lifters can be equipped with multiple suction chambers, allowing precise adaptation to your specific production processes. High-performance vacuum generators ensure safe handling even of slit strips with loose winding tension. Operation is carried out via an ergonomic control handle featuring all necessary control functions.

- Robust, weight-optimized steel construction
- Suction plates and suction chambers individually customized
- High operational safety thanks to special, replaceable seals
- Acoustic warning device with power-failure alert
- Plexiglass version or viewing window for precise centric positioning
- Switchable suction chambers for diameter adjustment
- Repositioning, loading and unloading, or order picking



VacuCoil VC-500KG

For restacking slit strip rings with diameters from 600–1.250 mm and widths up to 150 mm.



VacuCoil VC-500KG

With a plexiglass suction plate for easy centric placement on slit strip rings.



VacuCoil VC-500KG

With a total of 5 suction chambers for handling slit strips with diameters from 400–1.400 mm.




VacuCoil VC-500KG

With a flattened suction plate for precise edge placement of lifted slit strips with varying diameters.

VacuCoil VC

Technical data

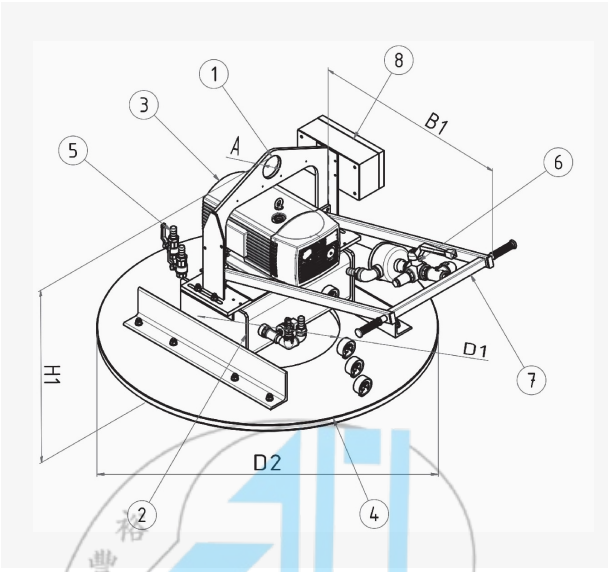

1 Suspension frame with lifting eye

2 Vacuum safety reservoir

3 Vacuum pump with check valve

4 Suction plate with individually adapted suction chambers

5 Distribution line with vacuum filter and visual control vacuum gauge

6 Vacuum valve for suction/release

7 Ergonomic control handle

8 Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions inside (mm)	Workpiece dimensions outside (mm)	Coil height (mm)	Vacuum pump (m^3/h)	Suction chambers	D1 inside (mm)	D2 outside (mm)	B1 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
250	VC-	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	125-175
500	VC-	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	150-200
750	VC-	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	175-225
1.000	VC-	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	200-250
1.500	VC-	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	250-300
2.000	VC-	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	300-400
3.000	VC-	100-500	500-2.500	25-1.000	40-100	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	400-500
4.000	VC-	100-500	500-2.500	25-1.000	63-160	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	600-800
5.000	VC-	100-500	500-2.500	25-1.000	63-160	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	800-1.000

VacuCoil VC-90E

Tilting slit strip rings and coils up to 2.500 kg

Structure and Application

A vacuum lifter individually tailored to your requirements for picking up horizontal or vertical slit strips for loading mandrels. The suction chambers are custom-designed and, thanks to a flattened configuration, can also handle upright slit strips with varying diameters. Operation is carried out via an ergonomic control handle featuring all necessary control functions.

- Robust, weight-optimized steel construction
- Individually customized suction plates and suction chambers
- High operational safety through special seals
- Acoustic warning device with power-failure alert
- Flattened design for accommodating different diameters
- Viewing window / plexiglass version for centric alignment
- Switchable suction chambers for diameter adjustment
- Repositioning, loading and unloading, or order picking



VacuCoil VC-90E-1000KG

For aluminium slit strips up to 1.800 mm in diameter.



VacuCoil VC-90E-800KG

For plastic slit strips in the production of roller shutter elements.




VacuCoil VC-90E-1250KG

For loading a mandrel with copper slit strips.

VacuCoil VC-90E

Technical data

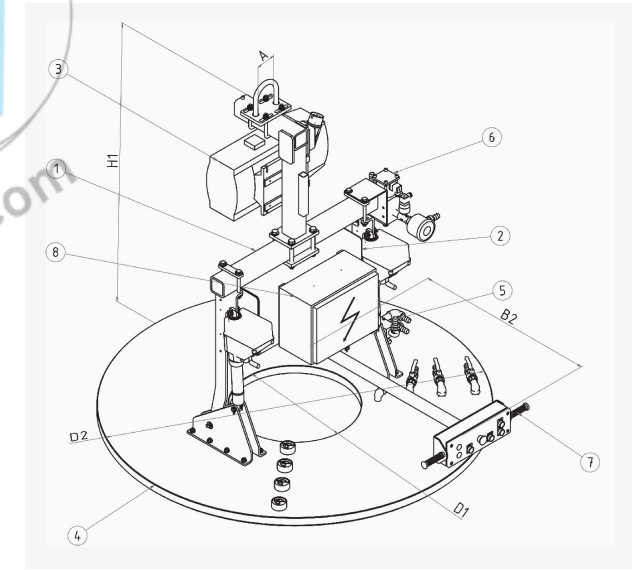

1. Suspension frame with tilting drives and lifting eye
2. Vacuum safety reservoir
3. Vacuum pump with check valve
4. Suction plate with individually adapted suction chambers
5. Distribution line with vacuum filter and visual control vacuum gauge
6. Vacuum valve for suction/release
7. Ergonomic control handle
8. Electronic warning device EW-0

Load capacity (kg)	Type	Coil diameter inside (mm)	Coil diameter outside (mm)	Coil height (mm)	Vacuum pump (m^3/h)	Suction chambers	D1 inside (mm)	D2 outside (mm)	B1 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
250	VC-90E	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	150-200
500	VC-90E	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	175-225
750	VC-90E	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	200-250
1.000	VC-90E	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	225-275
1.250	VC-90E	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	500-650
1.500	VC-90E	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	550-700
1.750	VC-90E	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	600-750
2.000	VC-90E	100-500	500-2.500	25-1.000	40-100	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	750-950
2.250	VC-90E	100-500	500-2.500	25-1.000	40-100	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	850-1.100
2.500	VC-90E	100-500	500-2.500	25-1.000	63-160	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	950-1.250

ASSURICH www.assurich.com

VacuCoilAutomatic VCA

Automatic handling of slit strip rings and coils up to 5.000 kg

Structure and application

System technology for connecting coil suction plates to lifting axes for manual or fully automated applications. All relevant signals—such as vacuum level, chamber occupancy and placement feedback—are integrated into the suction chambers and can be evaluated and controlled by a higher-level control system. This enables work processes to be carried out even more efficiently and safely. Vacuum generation is provided by separately installed vacuum power units, reducing overall weight.

- Stable steel or aluminium design for connection to lifting axes
- Automatic suction chamber detection via light sensors
- Automatic placement function for lift shutoff
- Tiltable version with geared motors
- Control system integration via BUS system possible
- Slit strip rings up to 2.500 mm in diameter and 1.000 mm in height
- Order picking, restacking, loading and unloading



VacuCoil VCA-90E-1500KG

With a flattened suction plate and tilting drive in an automated order-picking warehouse.



VacuCoil VCA-1000KG

In automatic operation for repositioning copper slit strips.



VacuCoil VCV-500KG

On a manually operated lifting axis for unloading copper coils.




VacuCoil VCA-2000KG

In automatic operation for aluminium coils up to 2.200 mm in diameter and widths up to 800 mm.

VacuCoilAutomatic VCA

Technical data

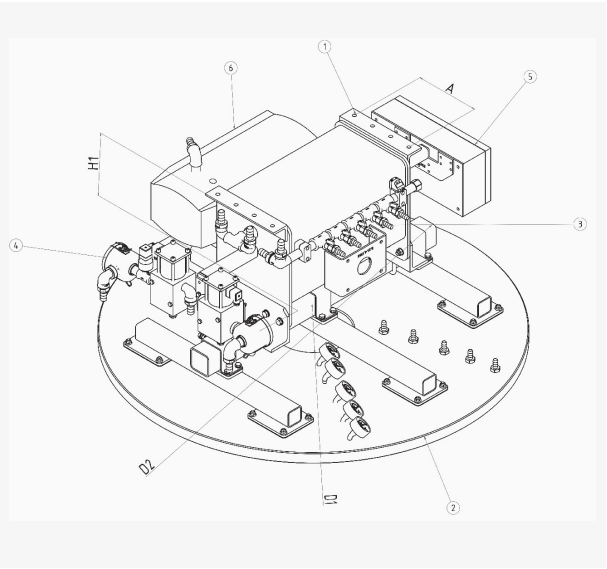

1. Flange plate for mounting on lifting units
2. Suction plate with individually adapted suction chambers
3. Distribution line with vacuum filter and visual control vacuum gauge
4. Vacuum valve for suction/release
5. Ergonomic control handle
6. Electronic warning device EW-0
7. Vacuum pump and safety reservoir mounted on the unit or installed separately as a power unit

Load capacity (kg)	Type	Coil diameter inside (mm)	Coil diameter outside (mm)	Coil height (mm)	Vacuum pump (m^3/h)	Suction chambers	D1 inside (mm)	D2 outside (mm)	B1 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
250	VCA-	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	200-500
500	VCA-	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	300-750
750	VCA-	100-500	500-2.500	25-1.000	16-40	1-8	75-450	400-2.650	600-1.200	700-1.000	100	500-1.000
1.000	VCA-	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	750-1.250
2.000	VCA-	100-500	500-2.500	25-1.000	25-63	1-8	75-450	400-2.650	600-1.200	700-1.000	100	1.000-1.500
3.000	VCA-	100-500	500-2.500	25-1.000	40-100	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	1.250-1.750
4.000	VCA-	100 500	500-2.500	25-1.000	63-160	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	1.500-2.000
5.000	VCA-	100-500	500-2.500	25-1.000	63-160	1-8	75-450	400-2.650	600-1.200	1.000-1.500	160	1.750-2.250

VacuCoilPaper VCP

Paper lifter for automatic cranes up to 7.500 kg

Structure and application

These paper lifters are designed for integration with automatic cranes in industrial paper roll warehouses. All relevant control signals and vacuum components are integrated into the vacuum lifter and monitored and actuated by the crane's central control system. To increase operational and process reliability, the vacuum lifters can be supplied by the crane's UPS in the event of a malfunction or equipped with an autonomously switching backup system featuring integrated batteries.

- Stable welded steel construction with guide insert for the crane carriage
- Automatic suction chamber detection via light sensors
- Automatic placement function for crane lift shutoff
- Telescopic centring mandrel for different core diameters
- Backup system using integrated batteries or UPS
- Two integrated vacuum pumps for maximum operational reliability
- Control system connection via interface
- Paper rolls up to 2.500 mm in diameter and 4.000 mm in height



VacuCoilPaper VCP-5000KG

In the automatic warehouse for paper rolls up to 2.000 mm in diameter and widths up to 2.000 mm.



VacuCoilPaper VCP-4000KG

In the automatic warehouse with 3 suction chambers, automatic chamber detection, and centring mandrel.




VacuCoilPaper VCP-6000KG

In the automatic warehouse for paper rolls up to 2.500 mm in diameter and widths up to 2.750 mm.

VacuCoilPaper VCP

Technical data

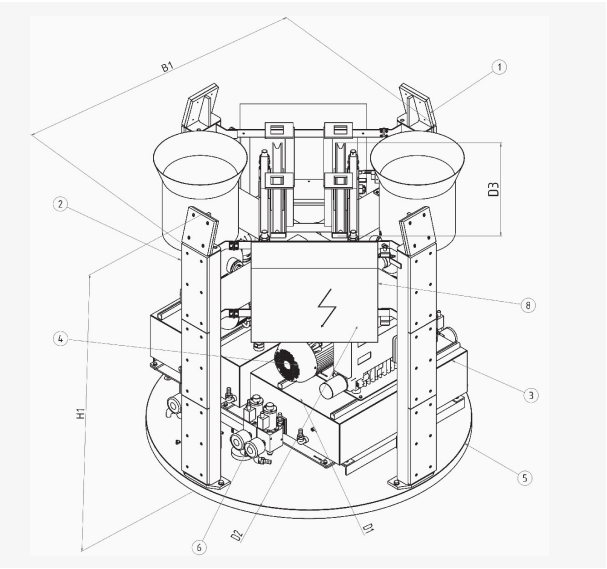

1 Base frame with rope pulleys and automatic placement function for the crane system

2 Interchangeable slide guides for entering the crane carriage

3 Vacuum safety reservoir

4 Vacuum pumps with check valves

5 Suction plate with suction chambers and sensors for diameter detection and vacuum monitoring

6 Vacuum valves in bistable design for individual control of the suction chambers

7 Backup system for switching to the battery system in the event of a power failure

8 Control cabinet for BUS system technology and power electronics

Load capacity	Type	Paper diameter		Paper height	vacuum pump	Suction chambers	D1	D2	D3	B1	H1	Dead weight
(kg)		inside (mm)	outside (mm)	(mm)	(m^3/h)		inside (mm)	outside (mm)		(mm)	(mm)	(kg)
2.500	VCP-	100-500	1.000-2.500	500-2.750	2 x 063	4-8	100-500	1.250-2.500	500-800	1.750-2.500	1.750-2.250	2.200-2.400
3.500	VCP-	100-500	1.000-2.500	500-2.750	2 x 063	4-8	100-500	1.250-2.500	500-800	1.750-2.500	1.750-2.250	2.300-2.500
4.500	VCP-	100-500	1.000-2.500	500-2.750	2 x 100	4-8	100-500	1.250-2.500	500-800	1.750-2.500	1.750-2.250	2.500-2.700
5.500	VCP-	100-500	1.000-2.500	500-2.750	2 x 100	4-8	100-500	1.250-2.500	500-800	1.750-2.500	1.750-2.250	2.600-2.800
6.500	VCP-	100-500	1.000-2.500	500-2.750	2 x 160	4-8	100-500	1.250-2.500	500-800	1.750-2.500	1.750-2.250	2.800-3.000
7.500	VCP-	100-500	1.000-2.500	500-2.750	2 x 160	4-8	100-500	1.250-2.500	500-800	1.750-2.500	1.750-2.250	2.900-3.100