VacuGiant VG

Horizontal transport of ultra-heavy loads up to 50.000 kg

Structure and Application

A heavy-duty lifting beam made of a robust welded steel construction, which also serves as a safety reservoir, ensuring extremely short suction times and high operational reliability. Depending on the requirements, the beams can be equipped with 1-, 2-, or 4-point suspension. Large-area suction pads with elastomer mounts provide the required grip and ensure even load distribution. Vacuum control is carried out via pendant control or remote control.

- Robust steel construction with oversized reservoir
- Acoustic and visual warning system with siren and signal lights
- With spring plungers or chain suspension
- Suitable for smooth and textured surfaces
- Manually and electrically telescopic versions
- Group switching for various panel dimensions
- Stacking, repositioning and order picking of panel materials
- For use in steel and aluminium rolling mills as well as outdoor areas



VacuGiant VG-12000KG-TEL

Electrically telescopic vacuum beam for loading a stretching bench.



VacuGiant VG-25000KG

With a double-row suction pad arrangement for sheets up to 20.000 × 3.000 × 50 mm.



VacuGiant VG-25000KG

For repositioning large-format sheets up to 20.000 × 3.500 × 50 mm.




VacuGiant VG-5000KG

Transport of aluminium raw plates up to 36.000 mm in length for the production of Airbus A380 wing components.

VacuGiant VG

Technical data

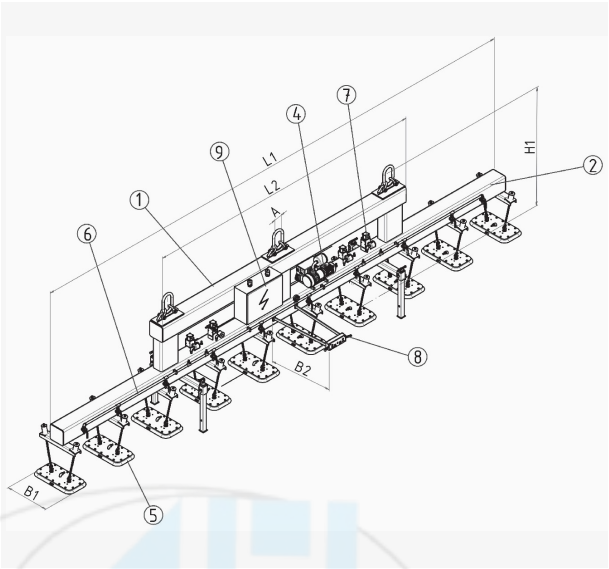

1. Suspension beam with 1-point to 4-point attachment
2. Longitudinal beam with integrated safety reservoir, optionally in telescopic design
3. Transverse beam, fixed or adjustable and lockable
4. Vacuum pump with check valve
5. Suction pads, fixed or adjustable and lockable
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-III

Load capacity	Type	Workpiece dimensions		Vacuum pump	Suction pad	Lifting eyes	L1	L2	B1	H1	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)			(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
5.000	VG160	6.000 x 1.000	24.000 x 4.000	0.40	4-8	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	140	750-1.250
7.500	VG160	6.000 x 1.000	24.000 x 4.000	0.40	6-12	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	140	1.000-1.500
10.000	VG200	6.000 x 1.000	24.000 x 4.000	0.63	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	160	1.500-2.000
15.000	VG200	6.000 x 1.000	24.000 x 4.000	0.63	12-24	1-2	4.000-22.000	3.000-16.000	1.000-2.200	1.000-1.600	160	1.750-2.250
20.000	VG300	6.000 x 1.000	24.000 x 4.000	0.100	16-32	1-2	4.000-22.000	3.000-16.000	1.000-2.200	1.000-1.600	200	3.000-3.500
25.000	VG300	6.000 x 1.000	24.000 x 4.000	0.100	20-40	2-4	4.000-22.000	3.000-16.000	1.000-2.200	1.000-1.600	200	3.500-4.000
30.000	VG300	6.000 x 1.000	24.000 x 4.000	0.160	24-48	2-4	4.000-22.000	3.000-16.000	1.000-2.200	1.200-1.800	220	3.750-4.250
35.000	VG300	6.000 x 1.000	24.000 x 4.000	0.160	28-52	2-4	4.000-22.000	3.000-16.000	1.000-2.200	1.200-1.800	220	4.000-4.500
40.000	VG300	6.000 x 1.000	24.000 x 4.000	0.250	32-64	2-4	4.000-22.000	3.000-16.000	1.000-2.200	1.200-1.800	240	4.250-4.750
45.000	VG400	6.000 x 1.000	24.000 x 4.000	0.250	36-72	2-4	4.000-22.000	3.000-16.000	1.000-2.200	1.200-1.800	240	5.000-6.000
50.000	VG400	6.000 x 1.000	24.000 x 4.000	0.250	40-80	2-4	4.000-22.000	3.000-16.000	1.000-2.200	1.200-1.800	260	5.500-6.500

VacuGiant VG-90E

Tilting ultra-heavy loads up to 7.500 kg

Structure and Application

A heavy-duty lifting beam made of a robust welded steel construction, which also serves as a safety reservoir to ensure extremely short suction times and high operational reliability. The robust, large-scale, synchronised tilting drives enable safe and efficient repositioning of heavy loads. Large-area suction pads with elastomer mounts provide the necessary grip and ensure even load distribution. Vacuum control is carried out via pendant control or remote control.

- Robust steel construction with oversized reservoir
- Acoustic and visual warning system with siren and signal lights
- Large-scale tilting drives with 15–30 s tilting time
- Suitable for smooth and textured surfaces
- Telescopic version for different panel lengths
- Group switching for various panel dimensions
- Stacking, repositioning and order picking of panel materials
- Assembly support in container and shipbuilding



VacuGiant VG-90E-2500KG

For truck side panels up to 13.500 mm in length.



VacuGiant VG-90E-7500KG

For large-format steel plates up to 4.000 × 2.000 mm.



VacuGiant VG-90E-3500

For tilting wooden panels up to 250 mm thick.




VacuGiant VG-90E-2500KG

With two blower stages for final assembly of wooden containers.

VacuGiant VG-90E

Technical data

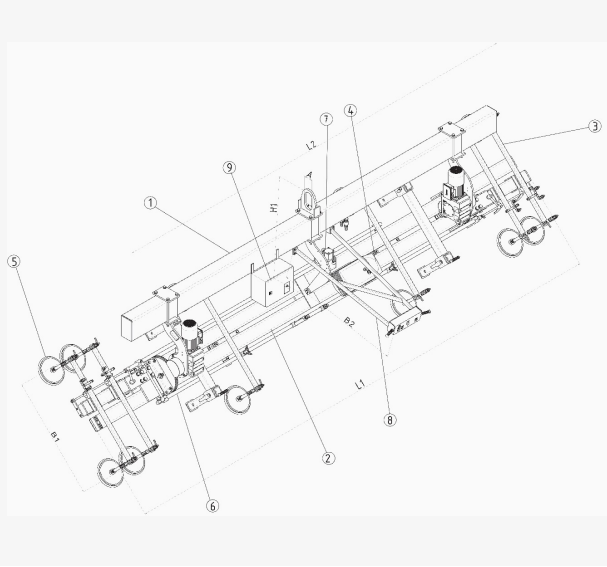

1. Suspension beam with tilting drives and 1-point to 4-point attachment
2. Longitudinal beam with integrated safety reservoir, optionally in telescopic design
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum pump	Suction pad	Lifting eyes	L1	L2	B1	H1	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)			(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
2.500	VG200	6.000 x 1.000	16.000 x 4.000	0.40	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	160	2.000-2.500
3.500	VG200	6.000 x 1.000	16.000 x 4.000	0.40	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	160	2.250-2.750
4.500	VG200	6.000 x 1.000	16.000 x 4.000	0.63	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	160	2.500-3.000
5.500	VG300	6.000 x 1.000	16.000 x 4.000	0.63	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	200	2.750-3.250
6.500	VG300	6.000 x 1.000	16.000 x 4.000	0.100	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	200	3.000-3.500
7.500	VG300	6.000 x 1.000	16.000 x 4.000	0.100	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	200	3.250-3.750

VacuGiant VG-180E

Turning ultra-heavy loads up to 5.000 kg

Structure and Application

A heavy-duty lifting beam made of a robust welded steel construction, which also serves as a safety reservoir to ensure extremely short suction times and high operational reliability. Robust and durable synchronised turning drives enable fast and safe reversal of loads. Large-area suction pads with elastomer mounts provide the necessary grip and ensure even load distribution. Vacuum control is carried out via pendant control or remote control.

- Robust steel construction with oversized reservoir
- Acoustic and visual warning system with siren and signal lights
- Large-scale turning drives with 30–45 s turning time
- Suitable for smooth and textured surfaces
- Telescopic version for different panel lengths
- Group switching for various panel dimensions
- Stacking, repositioning and order picking of panel materials
- Assembly support in container and shipbuilding



VacuGiant VG-180E-5000KG

Turning solid wood panels up to 12.000 × 3.500 × 100 mm.



VacuGiant VG-180E-1500KG

With compensating suspension and forklift shoes for turning plastic panels measuring up to 16.000 × 3.500 × 10 mm.




VacuGiant VG-180E-10000/2500KG

With cantilever arms for turning wooden panels weighing 2.500 kg and for the horizontal transport of concrete floor panels weighing 10.000 kg.

VacuGiant VG-180E

Technical data

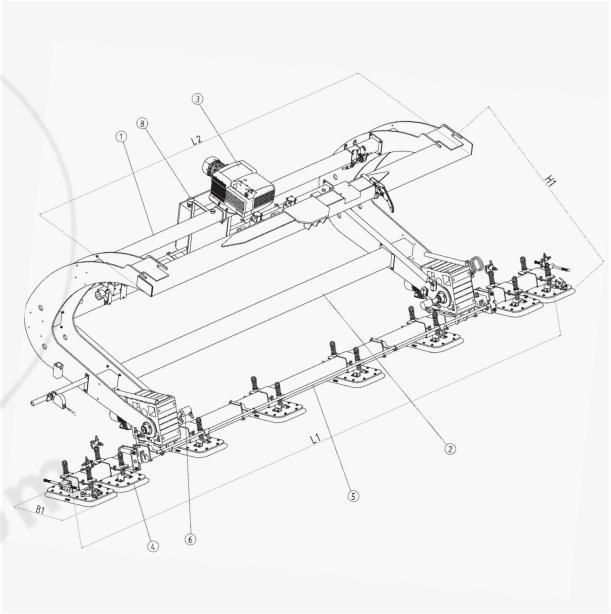

1. Suspension beam with turning drives and 1-point to 4-point attachment
2. Longitudinal beam with integrated safety reservoir, optionally in telescopic design
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Ergonomic control handle
9. Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Suction pad	Lifting eyes	L1 (mm)	L2 (mm)	B1 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
2.000	VG160	6.000 x 1.000	24.000 x 4.000	0.25	4-8	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	140	2.500-3.000
3.000	VG160	6.000 x 1.000	24.000 x 4.000	0.25	6-12	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	140	2.750-3.250
4.000	VG200	6.000 x 1.000	24.000 x 4.000	0.40	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	800-1.400	160	3.000-3.500
5.000	VG200	6.000 x 1.000	24.000 x 4.000	0.40	8-16	1-2	4.000-22.000	3.000-16.000	1.000-2.200	1.000-1.600	160	3.250-3.750

VacuGiant VG
Practical applications



VacuGiant VG-12000KG-TEL

Electromotorically extendable heavy-duty lifting beam for sheets measuring 8.000–14.000 mm in the retracted state.



VacuGiant VG-5000KG-TEL

Combination lifting beam for transporting individual sheets by vacuum as well as complete sheet bundles.



VacuGiant VG-12000KG-TEL

Electromotorically extendable vacuum beam for sheets measuring 8.000–14.000 mm, equipped with additional bundle grippers.



VacuGiant VG-12000KG-TEL

Electromotorically extendable vacuum beam with bundle grippers for lifting multiple sheets simultaneously.



VacuGiant VG-18000KG

Heavy-duty lifting beam for transporting glass blanks for telescope mirrors up to 6.000 mm in diameter.



VacuGiant VG-12000KG-TEL

In low-profile and telescopic design for aluminium sheets up to 14.000 × 3.000 × 100 mm.

VacuGiant VG
Practical applications



VacuGiant VG-VG90-2500KG

Tilting beam with rotation unit for assembly support of truck bodies.



VacuGiant VG-90E-2500KG

Electrically tiltable vacuum lifter for sandwich elements up to 12.000 mm in length.



VacuGiant VG-90E-2500KG

In the final assembly of room modules made from wooden elements.



VacuGiant VG-25000KG

With a double-row suction plate arrangement for transporting steel sheets up to 14.000 × 3.000 mm in size.



VacuGiant VG-5000KG

For transporting aluminium plates up to 36.000 mm in length for the production of wing components for the Airbus A380.



VacuGiant VG-12000KG

With a single-row suction plate arrangement for steel sheets up to 20.000 × 3.500 × 50 mm.