VacuPoro VP

Horizontal handling of porous panels up to 1.000 kg

Structure and application

A specialised vacuum lifter designed for air-permeable, porous materials such as chipboard, MDF or OSB panels. A high-performance blower with run-on flywheel mass ensures absolutely secure suction and provides sufficient holding time even in the event of a power failure. The vacuum lifters are equipped as standard with an electric vacuum control system and are operated via an ergonomically shaped control handle that provides a safe working distance. An acoustic warning device alerts the operator in case of insufficient vacuum or power failure.

- Power supply via cable with CEE plug
- High-performance vacuum blower with run-on flywheel mass
- Acoustic warning device with power-failure alert
- Electric vacuum control integrated into the handle
- Horizontal transport of porous materials
- Stacking, repositioning and order picking of panel materials
- Loading and unloading of CNC machining centres



VacuPoro VP-250KG

For handling raw and coated chipboard panels.



VacuPoro VP-500KG

With a separately installed blower for OSB panels.



VacuPoro VP-500KG

With integrated crane control for repositioning MDF and OSB panels.




VacuPoro VP-1000KG

In special design with 2 vacuum blowers for transporting multi-layer panels up to 10.000 mm in length.

VacuPoro VP

Technical data

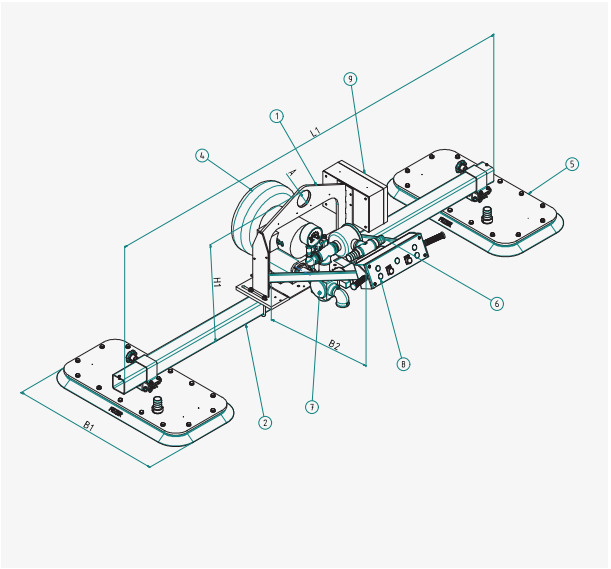

1 Suspension frame with lifting eye

2 Longitudinal beam

3 Transverse beam, adjustable and lockable

4 Vacuum blower with run-on flywheel mass

5 Adjustable and lockable suction pads

6 Distribution line with vacuum filter and visual control vacuum gauge

7 Vacuum valve for suction/release

8 Ergonomic control handle

9 Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum blower	Number of suction pads	L1	B1	B2	H1	A	Dead weight
(kg)		min (mm)	max (mm)	(m^3/h)		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
250	VP-250	1.000 x 500	4.100 x 2.100	160	1	850	500	750	840	80	160
		1.000 x 1.000	5.600 x 2.600	160	4	2.400	1.200	1.200	840	80	180
500	VP-500	1.000 x 500	4.100 x 2.100	160	2	2.400	850	750	840	80	190
		1.000 x 1.000	5.600 x 2.600	160	4	2.400	1.200	1.200	840	80	190
750	VP-750	1.000 x 500	4.100 x 2.100	160	3	2.400	850	1.200	840	100	220
		1.000 x 1.000	5.600 x 2.600	160	6	3.600	1.200	1.200	840	100	210
1.000	VP-1000	1.000 x 500	4.100 x 2.100	160	4	2.400	850	1.200	840	100	250
		1.000 x 1.000	5.600 x 2.600	160	8	3.600	1.200	1.200	840	100	240

VacuPoro VP-90E

Tilting porous panels up to 500 kg

Structure and application

A specialised vacuum lifter for air-permeable, porous materials such as chipboard, MDF or OSB panels. A high-performance blower with run-on flywheel mass, together with tilting cylinders, ensures absolutely secure suction and safe tilting of the materials. The vacuum lifters are equipped as standard with electric vacuum control and are operated via an ergonomically shaped control handle that provides a safe working distance. An acoustic warning device additionally alerts the operator in case of insufficient vacuum or power failure.

- Power supply via cable with CEE plug
- High-performance vacuum blower with run-on flywheel mass
- Acoustic warning device with power-failure alert
- Tilting via linear cylinders or geared motors
- Electric vacuum control integrated into the handle
- Horizontal transport of porous materials
- Stacking, repositioning and order picking of panel materials
- Loading and unloading of upright CNC machining centres



VacuPoro-90E-250KG

For loading an upright panel saw.



VacuPoro-90E-250KG

For repositioning vertically stored chipboard and OSB panels.



VacuPoro-90E-250KG

For loading an upright panel saw.




VacuPoro-90E-500KG

For loading a horizontal panel saw.

VacuPoro VP-90E

Technical data

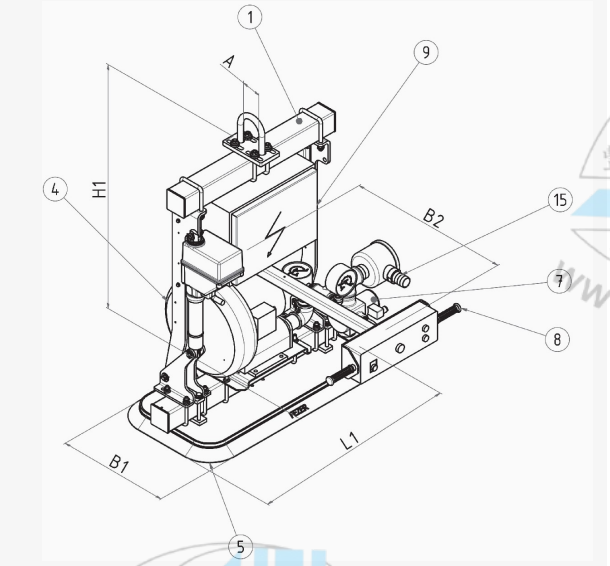

1 Suspension frame with tilting drives and lifting eye

2 Longitudinal beam

3 Transverse beam, adjustable and lockable

4 Vacuum blower with run-on flywheel mass

5 Adjustable and lockable suction pads

6 Distribution line with vacuum filter and visual control vacuum gauge

7 Vacuum valve for suction/release

8 Ergonomic control handle

9 Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum blower (m^3/h)	Number of suction pads	L1 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
125	VP-90E-125	1.000 x 500	4.100 x 2.100	168	1	850	500	750	1.290	80	150
		1.000 x 1.000	5.600 x 2.600	168	4	2.400	1.200	1.200	1.350	80	200
250	VP-90E-250	1.000 x 500	4.100 x 2.100	168	2	2.400	850	750	1.290	80	200
		1.000 x 1.000	5.600 x 2.600	168	4	2.400	1.200	1.200	1.350	80	210
375	VP-90E-375	1.000 x 500	4.100 x 2.100	276	3	2.400	850	1.200	1.290	100	225
		1.000 x 1.000	5.600 x 2.600	276	6	3.600	1.200	1.200	1.350	100	240
500	VP-90E-500	1.000 x 500	4.100 x 2.100	276	4	2.400	850	1.200	1.290	100	250
		1.000 x 1.000	5.600 x 2.600	276	8	3.600	1.200	1.200	1.350	100	260