

VacuQuicklift

with quick-release system – it doesn't get any faster

Setup and application

The VacuQuicklift is available in two basic versions: one for purely horizontal transport and another with a swiveling function for tilting workpieces. All functions—gripping, lifting, lowering, and releasing—are controlled with a single operating lever. The intuitive handling, combined with the unique quick-release system for automatic release, ensures extremely short cycle times.

Thanks to its modular design, the VacuQuicklift can be adapted very easily and quickly to a wide range of requirements and operating conditions. In addition to a quick-change system and a variety of suction grippers, rotation units and wireless remote controls for the vacuum generators are also available.

The VacuQuicklift can also be equipped with an extended control unit, enabling the handling of workpieces from low or very high positions while maintaining an ergonomic working posture—naturally also with the proven quick-release function.

The VacuQuicklift is suitable for a wide range of applications and not only makes your daily work easier but also significantly increases workplace safety and optimizes your process reliability. Wherever loads of up to 50 kg need to be lifted and moved on a regular basis, the VacuQuicklift supports your employees and ensures a highly efficient and ergonomic workflow.

Areas of application:

- Picking cartons in logistics centers
- Storing, retrieving, and relocating workpieces
- Panel handling in wood and sheet-metal processing
- Stones and concrete parts in the construction industry
- Loading and unloading CNC machining centers
- Bags in agriculture and bulk-material industries
- And many more!

ASSURICH www.assurich.com

VacuQuicklift
Assembly overview

Vacuum generator



Vacuum pumps

For the VPL100–VPL140 series, dry-running vacuum pumps with 25–40 m^3/h and integrated vacuum filters are available.



Sound-insulated pumps

The dry-running vacuum pumps are also available in a sound-insulated version, which provides significant noise reduction.

Lifting units



Lifting unit with rigid head

For purely horizontal handling or transferring loads.



Lifting unit with swivel head

For horizontal and vertical handling or for tilting loads.

VacuQuicklift
Assembly overview

Control units







Quick-release control unit

Suction – lift – lower – release: everything controlled with just one operating lever. It doesn't get any faster or easier.







MultiStacker control unit

For handling from high, medium, or low positions. The joint and extension provide improved ergonomics and workplace safety.

VacuQuicklift
Assembly overview

Equipment options



Flange plate for suction grippers

Base mounting plate for the fixed installation of suction grippers.



Quick-change plate (top)

Enables fastening to the control unit for changing suction grippers during ongoing operation.



Quick-change plate (bottom)

For fastening to any suction gripper, allowing easy and quick changes for different requirements.



Turning unit

With an optional locking module for every 90° increment – for rotating suction-held workpieces for layer-changing stacking.




Radio remote control

Energy saving at the push of a button – the vacuum generators can be conveniently controlled by radio on request.



Pneumatic module

For special functions that require pneumatic operations, an integrated compressed-air supply can be implemented.



Pneumatic switching module

Autonomous actuation of pneumatic grippers when picking up or setting down loads

VacuQuicklift
Assembly overview

Suction gripper



Single suction gripper

Available in a round flat or bellows design for handling containers and drums.



Single suction gripper

In a flat, rectangular design for small panels and workpieces with a solid surface.



Bag suction gripper

With a bellows suction cup and additional skirt for bags.



Bag suction gripper

Lightweight plastic version with dual sealing for bags.



Double suction gripper

With round bellows suction cups for smaller cartons and workpieces with curved surfaces



Double suction gripper

With rectangular suction cups for medium-sized panels and rigid cartons.



Quadruple suction gripper

With round bellows suction grippers. The suction grippers are adjustable and lockable. Suitable for large-area panels and cartons.



Canister gripper

With compensating valve for handling canisters or containers with carrying handles.



Universal hook gripper

Mechanical gripper for attaching a wide range of loads using a crane hook.

VacuQuicklift
Assembly overview

Suction gripper



Mechanical undergripper

With compensating valve for handling loads by undergripping.



Area suction gripper

With automatic switching controlfor suction and release when setting down.



Combination gripper

And the subsequent restacking of the packaged carton using a quadruple suction gripper.



Canister gripper

Mechanical undergripper for containers or canisters with handles or brackets.



High-vacuum gripper

With pneumatic module, separate vacuum generators, and manual slide valve for handling applications with small suction surfaces.



Carton gripper

With two bellows suction cups for optimal adaptation to curved surfaces.



Bellows suction gripper

With additional sealing insert for handling workpieces with slightly rough surfaces.



Box gripper

Mechanical gripper with clamp gripper for handling boxes and containers.

VacuQuicklift
Assembly overview

Suction gripper



Combination gripper

With foldable undergrippers for packing frames into a carton.








Multigripper

Our multigripper has been specially developed for our VacuQuicklift tube lifter and can easily pick up loads of varying sizes and surface characteristics. Even small gaps and cracks pose no problem. What makes this innovation special? A total of 40 integrated nozzles and bellows suction cups ensure optimal surface adaptation and prevent any significant loss of performance from 'false air' drawn in through unused suction cups.

VacuQuicklift

Technical data

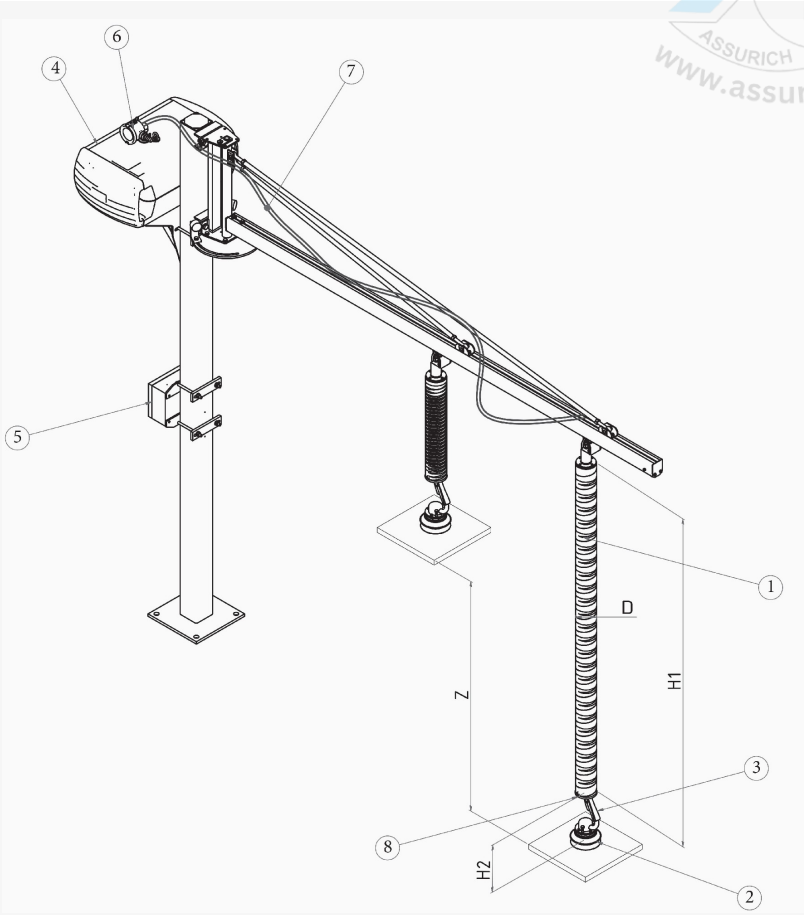

VacuQuicklift

Technical data

1 Lifting unit consisting of rotary head, lifting tube, and suction pad
A safety valve in the rotary head allows suction-held loads to descend in a controlled and slow manner in the event of a power failure.

2 Suction gripper or gripping unit with custom adaptations
With a safety factor of 2.5, they provide the necessary hold for the safe handling of loads

3 Accessories for suction pads: quick-change couplings, rotating devices

4 Robust and high-performance vacuum generators
Ensure the generation of the required vacuum and enable fast handling processes.

5 Motor protection switch or radio remote control
Protect the vacuum generators from overload and offer the option of remote operation via the control unit.

6 Large-dimensioned vacuum filters
With replaceable cartridges, they protect the vacuum generators from contamination and damage.

7 Supply hose
Connects the vacuum generators to the lifting unit. Lengths of up to 50 meters and more are possible.

8 Adjustment screw for working height without load
This allows the tube lifter to be set to an ergonomic base height.

Type	Load capacity non-porous/ porous	Handling	Workpiece dimensions		Vacuum generator	Lifting speed	H1	H2	H3	D	Z	Dead weight
	(kg)		min (mm)	max (mm)	(m^3/h)	(m/min)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
VQL100	35/30	horizontal	200 x 200	2.000 x 1.000	T4.25	25-55	2.320/2.800	235	100-250	100	1.400/1.700	6-10
VQL100-90	35/30	pivoting	200 x 200	2.000 x 1.000	T4.25	25-55	2.320/2.800	235	100-250	100	1.400/1.700	6-10
VQL120	50/40	horizontal	200 x 200	2.000 x 1.000	T4.40	25-55	2.320/2.800	235	100-250	120	1.400/1.700	6-10
VQL120-90	50/40	pivoting	200 x 200	2.000 x 1.000	T4.40	25-55	2.320/2.800	235	100-250	120	1.400/1.700	6-10
VQL140	65/55	horizontal	200 x 200	2.000 x 1.000	T4.40	25-55	2.320/2.800	235	100-250	140	1.400/1.700	8-12
VQL140-90	65/55	pivoting	200 x 200	2.000 x 1.000	T4.40	25-55	2.320/2.800	235	100-250	140	1.400/1.700	8-12