VacuStand VS

Stationary work stand

Structure and application

The work stands are made of sturdy aluminium profiles and have a modular design. Thanks to continuous rotation and the 90° swivel mechanism, gripped loads can be positioned and processed in almost any orientation. Various suction gripper designs and additional options allow optimal adaptation to the workpieces being handled. The standard height adjustment with clamping ensures an ergonomic working height.

- Integrated safety reservoir
- Push-button valves for autonomous gripping of workpieces
- Clamping lever for locking rotation and swivel movements
- ECO module for energy savings
- Optional: Indexing modules for rotation and swivel movements
- Optional: Drives for rotation, swivel, and height adjustment
- Optional: "ACCU" version for battery-powered operation



VacuStand VS-I-50KG

With indexing modules and foot operation for pre-assembly of window



VacuStand VS-I-25KG

With indexing modules and foot operation, suitable for processing seat surfaces.



VacuStand VS-I-75KG

With Add-on II, suitable for sanding work on aluminium base plates.



Rastmodul RM-4

With indexing module for four positions, every 22.5°, operated via foot pedals.



VacuStand VS-I-100KG

With Add-on IV, adjustable and lockable via longitudinal and cross beams.




ACCU-Modul

Suitable for cordless operation using a tool battery and a separate charger.

VacuStand VS

Technical data

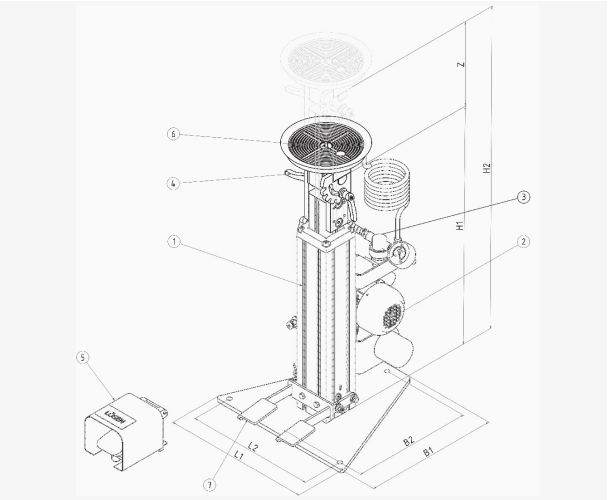

1. Base stand with telescopic aluminium profiles
2. Vacuum pump with check valve and vacuum reservoir
3. Vacuum filter
4. Swivel and rotary joint with locking lever
5. Foot-operated release valve
6. Interface for suction grippers and attachments
7. Optional foot actuators for indexing modules

Type	Vacuum generator	Operating voltage	Swivelling	Rotating	L1	L2	B1	B2	H1	H2	Z	Dead weight
			(°)	(°)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
VS-I-AL	T4.4	230 V1AC	90	360	424	380	396	353	770	1.025	255	45-55
VS-I-AL-ACCU	TF4.2	24 VDC	90	360	424	380	396	353	770	1.025	255	50-60

Suction grippers / attachments	Suction gripper FSRL 120	Suction gripper FSRL 170	Suction gripper FSRL 230	Suction gripper FSRL 290	Suction gripper FSL 100x200	Suction gripper FSL 100x300	Add-on II 2xFSRL120	Add-on II 2xFSRL170	Add-on IV 4xFSRL120	Add-on II 2xFSRL170
dimension D, L×B (mm)	120	170	230	290	100x200	100x300	820x200	820x200	820x400	820x400
holding force hor./vert. (kg)	25/13	50/25	100/50	150/75	40/20	65/33	50/25	100/50	100/50	100/50
dead weight (kg)	0,35	0,55	1,00	1,95	1,25	1,60	6,25	6,75	11	12

VacuStand VS
Mobile work stand

Structure and application

The mobile work stands are suitable both for changing workstations and for assembly support on assembly lines or automated transport systems. Thanks to the smooth-running castors, the stands can be moved effortlessly and with minimal effort to the required workstation. For an ergonomic working posture, gripped workpieces can be rotated, swiveled, raised, or lowered into the ideal working position. All positions can be locked using clamping levers or optional indexing modules.

- Mobile use facilitated by castors with parking brake
- Integrated safety reservoir
- Push-button valves for autonomous gripping of workpieces
- Clamping levers for locking rotation and swivel movements
- ECO module for energy savings
- Optional: Indexing modules for rotation and swivel movements
- Optional: Drives for rotation, swivel, and height adjustment
- Optional: "ACCU" version for cordless operation



VacuStand VS-I-AL-FSRL290

Mounted on a mobile base plate with a single suction gripper.



VacuStand VS-I-AL-AS/SO


Equipped with ACCU module and electric height and swivel adjustment.



VacuStand VS-I-AL-FTS

With ACCU module and electric height and swivel adjustment.

VacuStand VS
Technical data

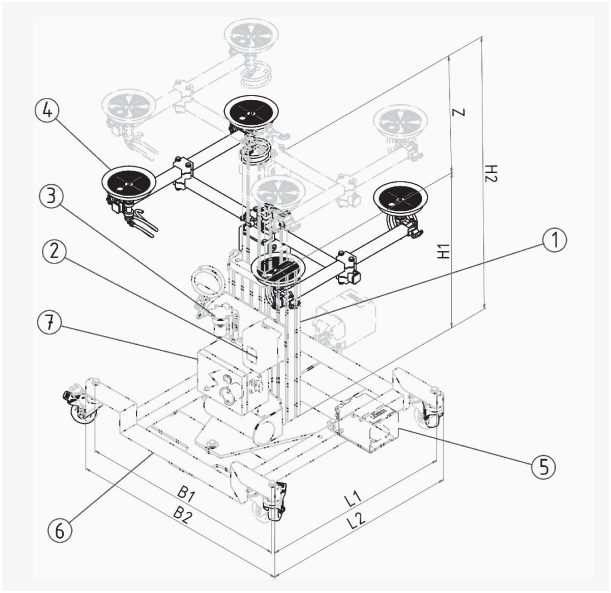

1 Base stand with telescopic aluminium profiles

2 Vacuum pump with check valve

3 Vacuum filter

4 Swivel and rotary joint with locking lever

5 Foot release valve

6 Interface for suction grippers and attachments

7 Optional foot actuators for indexing modules

Type	Vacuum generator	Operating voltage	Swivelling (°)	Rotating (°)	L1 (mm)	L2 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	H2 (mm)	Z (mm)	Dead weight (kg)
VS-I-AL	T4.4	230 V1AC	90	360	860	920	860	920	770	1.025	255	80-90
VS-I-AL-ACCU	TF4.2	24 VDC	90	360	860	920	860	920	770	1.025	255	85-95

Suction grippers / attachments	Suction gripper FSRL 120	Suction gripper FSRL 170	Suction gripper FSRL 230	Suction gripper FSRL 290	Suction gripper FSL 100x200	Suction gripper FSL 100x300	Add-on II 2xFSRL120	Add-on II 2xFSRL120	Add-on IV 4xFSRL120	Add-on II 2xFSRL170
dimension D, L×B (mm)	120	170	230	290	100x200	100x300	820x200	820x200	820x400	820x400
Holding force hor./vert. (kg)	25/13	50/25	100/50	150/75	40/20	65/33	50/25	100/50	100/50	100/50
Eigengewicht (kg)	0,35	0,55	1,00	1,95	1,25	1,60	6,25	6,75	11	12