VacuWood VWB

Horizontal handling of planks up to 500 kg

Structure and application

A specialised vacuum lifter for timber and planks with lengths of up to 8.000 mm. The vacuum lifters are equipped with powerful vacuum generators that allow safe handling even of rough-sawn workpieces. Special replaceable seals ensure absolutely secure and gentle handling. As standard, the vacuum lifters feature manual vacuum control and an ergonomic operating handle with a safe working distance. An acoustic warning device alerts the operator in the event of insufficient vacuum or a power failure.

- Power supply via cable with CEE plug
- Robust and powerful vacuum generators
- Acoustic warning device with power-failure alert
- Manual vacuum control integrated into the handle
- Horizontal transport of rough-sawn materials
- Stacking, repositioning and order picking of panel materials
- Loading and unloading of saw frames



VacuWood VW-250KG

For restacking timber planks downstream of a panel saw.



VacuWood VW-500KG

For feeding logs to a gang saw.



VacuWood VW-250KG

With special suction pads for rough-sawn surfaces.




VacuWood VW-250KG

For transporting timber up to 6.000 mm.

VacuWood VWB

Technical data

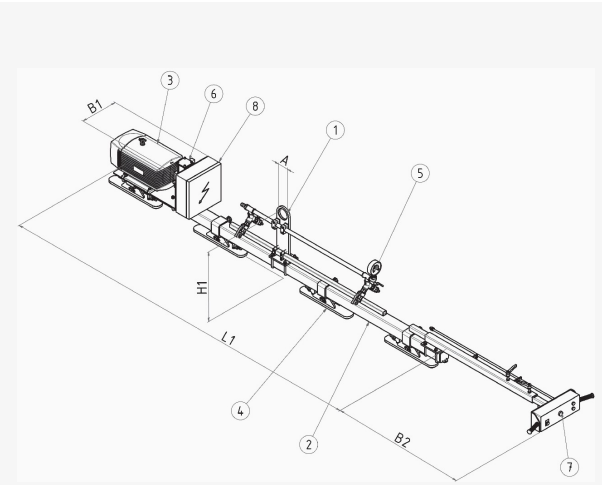

1 Lifting eye

2 Longitudinal beam

3 Vacuum pump with check valve

4 Adjustable and lockable suction pads

5 Distribution line with vacuum filter and visual control vacuum gauge

6 Vacuum valve for suction/release

7 Ergonomic control handle

8 Electronic warning device EW-0

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum generator (m^3/h)	Number of suction pads	L1 (mm)	L2 (mm)	B1 (mm)	H1 (mm)	A (mm)	Dead weight (kg)
125	VWB-125	1.500 x 100	6.000 x 800	25	2	3.000	1.800	300	550	80	115 - 130
250	VWB-250	1.500 x 120	6.000 x 800	25	2	3.000	1.800	300	550	80	120 - 140
375	VWB-375	1.500 x 170	6.000 x 800	40	2	3.000	1.800	300	550	80	125 - 150
500	VWB-500	1.500 x 250	6.000 x 800	40	2	3.000	1.800	300	550	80	130 - 160

VacuWood VWLB

Horizontal handling of glulam beams up to 1.000 kg

Structure and application

A specialised vacuum lifter for timber and glulam beams with lengths of up to 24.000 mm. The vacuum lifters are built on a weight-optimised steel structure that integrates all required vacuum components. Special suction pads, suspended via a rocker mechanism and equipped with replaceable seals, adapt to the natural deflection of long timber elements, ensuring absolutely safe handling. Operation is carried out either via a control handle, a pendant control, or by remote control.

- Power supply via cable with CEE plug
- Robust and powerful vacuum generators
- Acoustic warning device with power-failure alert
- Special rocker suspension for deflection compensation
- Handling of foil-wrapped timber
- Horizontal transport of rough-sawn materials
- Stacking, repositioning and order picking of timber



VacuWood VWLB-250

For foil-wrapped glulam beams up to 14.000 mm in length.



VacuWood VWLB-500

With double suction pads, enabling simultaneous lifting of double-layer timber up to 12.000 mm in length.



VacuWood VWLB-250KG

For rearranging timber up to 12.000 mm in length.




VacuWood VWLB-750KG

For order picking of 16.000 mm long timber in a stanchion rack.

VacuWood VWLB

Technical data

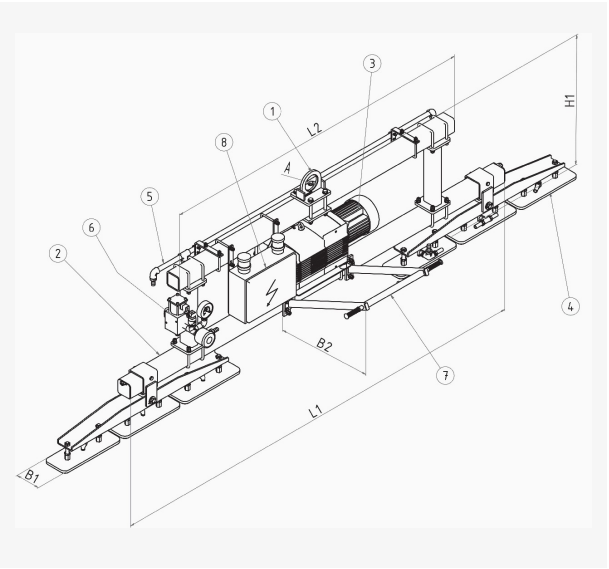

1 Lifting eye

2 Longitudinal beam

3 Vacuum pump with check valve

4 Suction pads with rocker suspension, adjustable and lockable

5 Distribution line with vacuum filter and visual control vacuum gauge

6 Vacuum valve for suction/release

7 Ergonomic control handle

8 Electronic warning device EW-0

Load capacity	Type	Workpiece dimensions		Vacuum generator	Number of suction pads	L1	L2	B1	H1	A	dead weight
(kg)		min (mm)	max (mm)	(m^3/h)		(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
250	VWLB-250	8.000 x 100	16.000 x 400	40	4-8	6.000	1.800	300	550	120	125 - 140
500	VWLB-500	8.000 x 120	16.000 x 400	40	4-8	6.000	1.800	300	550	120	130 - 150
750	VWLB-750	12.000 x 170	24.000 x 600	40	4-8	10.000	1.800	300	550	120	150 - 180
1.000	VWLB-1000	12.000 x 250	24.000 x 600	40	4-8	10.000	1.800	300	550	120	160 - 250