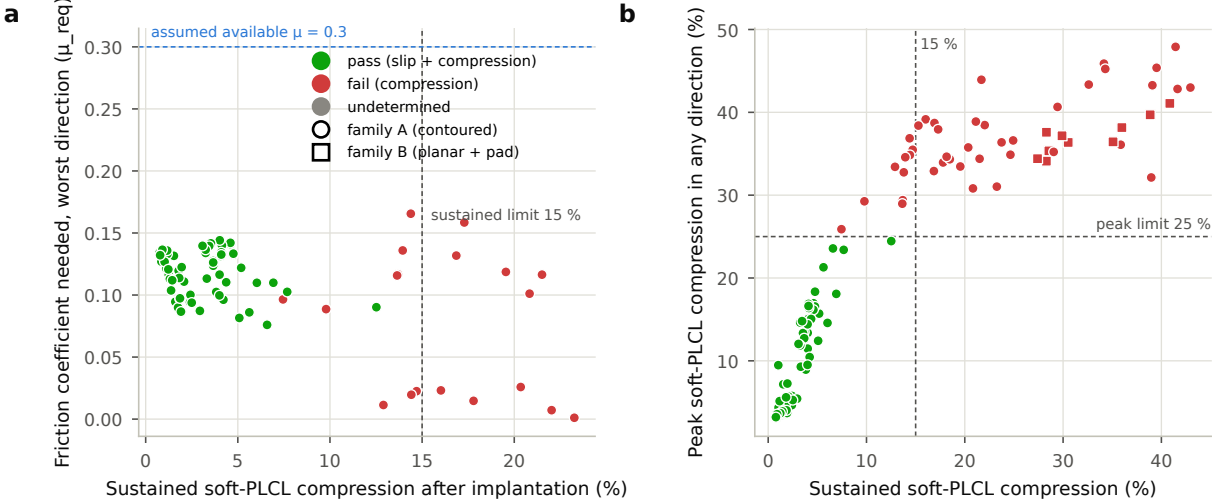
a
assumed available μ = 0.3
pass (slip + compression)
fail (compression)
undetermined
family A (contoured)
family B (planar + pad)
sustained limit 15 %
Friction coefficient needed, worst direction (μ_req)
Sustained soft-PLCL compression after implantation (%)
b
15 %
peak limit 25 %
Peak soft-PLCL compression in any direction (%)
Sustained soft-PLCL compression (%)