

TINY SIN

FLIGHT MANUAL

v1.0

Hello Aviator,

Tiny Sim simulates a Cessna 172R "Skyhawk" with a Garmin G1000 glass cockpit (which is a fancy way of saying 'large screens' instead of traditional instruments). If you are interested in more details about the actual airplane, you can refer to Cessna's official website <https://cessna.txtav.com/en/piston/cessna-skyhawk>

While the simulator is small on the outside (128px by 128px to be exact), it is really powerful under the hood. Among other things, it features:

- A realistic flight model (taking into account angle of attack, inertia, wind, engine torque, air density, collision with objects, etc.). In simple words, this means that it flies really well and you can learn a lot about real flight with Tiny Sim.
- Stunning 3D graphics (nothing less to be expected from PICO-8 gpu!)
 - Sky gradient
 - Perspective correct cloud layer & light line
 - Model level of detail (distance based)
- A world to discover with airports, a town, the sea, ships, an island and even mountains (well... a mountain). You will be able to fly in different weather conditions, from clear weather with unlimited visibility to low ceilings and visibility with stormy winds.



1. Throttle & RPM
☐ (Y/Z) Low RPM > go slow
☒ (X) High RPM > go fast
2. Flaps
☒ player 2 (Q) to toggle
 Flaps up > take-off and cruise
 Flaps down > landing
3. Speed Indicator
 Airspeed in knots
4. Altitude & Climb Rate
 Altitude in feet, climb rate in 100s of feet per minute
5. GPS Destination
 ↑ player 2 (E) to change
 DIS distance to destination
 BRG direction to destination
6. Heading and Wind indicator
 Shows in which direction you are going and where the wind is coming from
7. GPS Pointer
 Blue arrow points to selected GPS destination
8. Moving map
☒ player 2 (Tab) to toggle
9. Airport symbol
 White line indicates runway direction
10. You!
11. Estimated time of arrival at GPS destination

There are two aspects to this simulator: while you can learn a lot about flying a small airplane and e.g. try to land it in messy weather with no outside visibility, you can also just have fun flying around and buzz the tower (hello *Top Gun!*), do low level night flying at Smallville, fly around Mt. Big or make a trip to the beach at Petite Ile. Just don't fly into the no-fly zone southeast of Tinyville and have your license revoked!

This guide will first explain you how the simulator works, especially the flight instruments. The flight school chapter will then teach you about basic (and not so basic) flight maneuvers. It includes 20 exercises, which you can accomplish directly in Tiny Sim.


Then the guide will show you some highlights of the world built into Tiny Sim and what you can do.

Now go and have fun with Tiny Sim! (And you might even learn something...)

@FSouchu and @tcueni

PS: Oh, you're asking why you can only fly at dawn and at night. Good question! Given the limited resolution and color palette of Pico-8, this is the most realistic outside view that can be achieved. Smallville looks beautiful during the night with all the glaring lights and the skyscrapers towering into the night sky. During the day it would most likely look like grey polygons and lines on a green surface. Your feedback on this topic is very welcome!

Red chevrons indicate that you are climbing or descending at an angle which is too steep and that you should move the nose in the directions of the chevrons. In the example below, you should push the nose down in order to avoid stalling the airplane and falling out of the sky like a rock.



Wind Vector

Indicates, where the wind is coming from. In this example, we have right tailwind and you would need to point your nose slightly right (i.e. into the wind) to maintain your direction. You can observe the influence of the wind also in the groundspeed, which is shown in the right cockpit.




Left Cockpit (Primary Flight Display, PFD)

Radios / GPS

On the left side, there is the NAV1 navigation radio. The radio is currently tuned to the ITN station, which is the instrument landing system (ILS) at Tinyville. On the right side, there is the selected GPS waypoint (Smallville airport - SMV) as well as the distance to it (11 nautical miles) and the bearing to reach the waypoint (meaning that you need to turn to a heading of 211 degrees to get to SMV).

Press ↑player 2 ('E') to change the GPS waypoint.




Airspeed Indicator (ASI)

The airspeed indicator indicates the airplane's airspeed (i.e. the speed of the airplane through the air, NOT relative to the ground). The speed is shown as a numeric value in knots and there is a moving speed tape in the background to show how fast the airspeed is changing. Indicated airspeed decreases with altitude, i.e. if you fly high, the indicated airspeed value will be lower than your actual airspeed.

On the right side of the tape, you have so-called speed bugs, which show you some important speeds of this airplane:

- Vr: rotation speed (lift the nose at this speed when taking off), 55 knots
- Vx: best climb angle (maximum altitude gain per distance), 60 knots
- Vg: best engine-out glide speed (use in case of engine failure to glide as far as possible), 65 knots
- Vy: best climb rate (maximum altitude gain per time), 79 knots



Altimeter and Vertical Speed Indicator (VSI)

The altimeter shows the airplane's altitude above sea level in feet. There is a moving altitude tape in the background to show, how fast the altitude is changing.

The vertical speed indicator is the moving, black bar on the right side and indicates the climb or descent speed in 100s of feet per minute (in this case: 800 feet/min climb).



Attitude Indicator (AI - aka artificial horizon)

The attitude indicator shows the airplane's pitch (the nose pointing up or down) and bank (left or right turn). It helps you controlling the airplane at night or in the clouds. The airplane is represented by the yellow symbol. In the example below, the airplane is in a climbing left turn.

The parallel white lines above and below the horizon line represent multiples of 10 degrees of pitch. In the example, this represents around 8 degrees nose-up.

Inset Map

The inset map is a small map located directly on the primary flight display (as opposed to the large map on the multi-function display in the right cockpit). Length and width of the area displayed are both 5 nautical miles. In the example above, there is a VOR navigation beacon (blue) approximately 1 nautical mile straight ahead. The colors are as follows:

- Pink: airport
- Blue: VOR navigation beacon
- Grey: city or landmark

They correspond to the colors in the large map on the MFD.



Flaps

Wing flaps have the purpose of slowing the plane down and giving the pilot a better visibility for landing (i.e. the nose can stay lower for landing). You normally lower them, when you start the approach. Attention: don't lower the flaps above 110 knots or you might damage the airplane! Take-off is normally done without flaps. Press  player 2 'Q' to lower and raise the flaps.



Throttle and RPM Indicator

The throttle controls the power of the airplane's engine, which is indicated in RPM. Maximum continuous power for take-off is 2400 RPM, cruise around 2200-2300 RPM, initial approach 2000 RPM, intermediate approach 1300-1800 RPM and for landing the throttle should be completely closed, resulting in 700 RPM.

Due to air density decreasing with altitude, the engine's maximum power output will also decrease with altitude, meaning that at 10,000 feet, you will not have the full 2400 RPM at your disposal.

Press **X**/**O**/**X**/**Z** to increase/decrease power.



Horizontal Situation Indicator (HSI)

On top, there is the airplane's heading, i.e. the direction the nose is pointing to (which is not the direction you are flying to, if there is some wind!). Below, there is the round heading indicator with the four cardinal directions (north, east, south and west) and the airplane symbol in the middle.

There is the green course deviation indicator (CDI) laid over. The tip of the green arrow shows the course to the station and the middle part of the green line (near the airplane symbol) indicates if you are flying on the correct course.

If the green line is left of the airplane symbol, you need to turn left towards the line and - once it is recentered - turn right again so the tip of the arrow points straight ahead. If the green line is right of the airplane symbol, turn right towards the line and - once it is recentered - turn left again so the tip of the arrow points straight ahead.

The blue arrow is the bearing pointer (BP) and points towards another waypoint. In the example above, the waypoint PTI is located slightly to the right, 25 nautical miles away. To fly towards the waypoint, simply turn until the tip of the arrow points straight ahead. The distance shown and the direction of the tip of the arrow correspond to the DIS and BRG values of the GPS.

Press **↑**player 2 ('E') to change the GPS waypoint.



Glideslope Indicator

The glideslope indicator shows if you are too high or too low on an ILS approach. The green dot represents the correct glideslope you should be on. If it is above you, this means that you are too low and you need to fly higher. If it is below you, this means that you are too high and you need fly lower. In the figure above, the airplane is very slightly below the correct glidepath.



Timer

The timer shows the elapsed time since the beginning of the flight.



Right Cockpit (Multi-function Display, MFD)

GPS

The multi-function display (MFD) shows the same GPS direct-to waypoint as the primary flight display (PFD), in this case PTI (Petite Ile). To the right, you have the groundspeed (GS), which indicates how fast you are doing relative to the ground (which is not the same speed shown on the airspeed indicator in the left cockpit). If you have a headwind, your groundspeed is lower and if you have a tailwind, your groundspeed is higher.

Press **player 2** ('Tab') to toggle between left and right cockpit

Press **↑** player 2 ('E') to change the GPS waypoint.

Exercise: Choose a stormy weather scenario and fly a full circle while maintaining the same indicated airspeed. Note how groundspeed (and the wind vector) change, while you fly the circle.



Map

In the center of the map you can see your own airplane. Further, you will see airports (with the runway direction), the instrument landing system (ILS) at Tinyville, VOR navigation beacons (blue), a prohibited zone, selected cities and landmarks and the shoreline.



Flight Lessons

Welcome to the Tiny Flight School! I will be your flight instructor and help you earn your license.

Straight and level flight

One of the most important things is that you can fly straight (airplane does not turn) and level (airplane does not climb or descend) in various conditions. To do this, you can use the outside view (in fair weather) or your instruments (in bad weather). Specifically, you will use the attitude indicator to check that your wings are level and confirm straight and level flight with the HSI / heading indicator and altimeter / vertical speed indicator. Heading and altitude should remain constant and vertical speed should read zero.

Exercise 1: Select full approach and clear weather. Maintain a heading of 313° and an altitude of 3000 feet. Note the attitude of the nose (on the horizon) and the airspeed. If you deviate from either heading or altitude, make small corrections to go back to 313° and 3000 feet. Avoid over-correcting! Now reduce power to approx. 1650 RPM. You will need to raise the nose to maintain your altitude. The result will be straight and level flight with 4-5° nose up and indicated airspeed of 75 knots. Re-apply full power and wait until attitude and airspeed have stabilized again.

Exercise 2: Repeat in stormy weather, solely by using your instruments. Always maintain straight and level flight. Check what happens with attitude and airspeed if you lower flaps and raise them again.

Level turns

Once you have mastered straight and level flight, it is time to start turning. Use the left and right keys to turn in either direction. In turns, the nose has a tendency to drop, so be sure to apply back pressure to maintain your altitude.

Exercise 3: Select full approach and clear weather. You start out on a 313° heading. Make a full circle to the left while maintaining 3000 feet. Keep an eye on the heading and begin to straighten out the airplane 5° before reaching 313° again. After that, make a right turn to 085° and re-establish straight and level flight.

Exercise 4: Repeat in stormy weather and at 1800 RPM, solely by using your instruments.

Climb and descent

Climb and descent are always a function of pitch (the nose pointing up or down) and power. In order to climb, apply full power and point the nose up. The more you point the nose up, the lower the airspeed of the airplane will be. Basically, you will try to climb at a certain airspeed by adjusting your pitch. There are a couple of pre-defined climb speeds: V_x (marked 'X' on the airspeed tape) gives you the best climb angle, i.e. the most altitude gain per distance. If you have obstacles in front of you that you need to clear, V_x is your best bet. V_y (marked 'Y' on the airspeed tape) gives you the best climb rate, i.e. the most altitude gain per time. If you want to get to your cruising altitude as soon as possible, fly at V_y . And finally, there is cruise climb (not shown on the airspeed tape, 85-95 knots), which is more shallow to better cool the engine and provide better forward visibility while climbing.

In order to descend, you reduce power and point the nose down. You normally try to descend at 500-1000 feet per minute and adjust power so as to not overspeed the airplane. (If you point the nose down at full power, you will gain airspeed very fast!) For a cruise descent, 2000 RPM and 5° nose down are a good starting point. On approach, you will normally use lower power settings (1400-1800 RPM).

Exercise 5: Select full approach and clear weather. Apply full power and start raising the nose while maintaining a heading of 313°. Raise the nose to obtain a stable airspeed of 95 knots (cruise climb). Note pitch, airspeed and vertical speed. Do the same for V_y (79 knots) and V_x (60 knots). Re-establish level flight and reduce power to around 2000 RPM. Lower the nose to get a 500 feet per minute descent. Note the resulting airspeed. Now, lower the nose further to obtain a 1000 feet per minute descent and note how the airspeed increases. Reduce power to 1500 RPM while maintaining a 1000 feet per minute descent. Re-establish level flight.

Exercise 6: Repeat in stormy weather while doing a left (climbing and descending) turn.

Take-off

You are cleared for take-off! Align the airplane with the runway and check the heading is correct. Normally, you will select flaps up for take-off but you have the option of taking off with flaps, in which case you will get off the ground sooner but climb slower due to increased drag. Then apply full power and re-check RPM, which should be at 2400. Watch the airspeed build up and gently start pulling the nose up at 55 knots (V_r , marked 'R' on the airspeed tape) to around 12° nose up. (Note that if you pull up the nose too early, the airplane will not be able to lift off.)

Climb at V_x and maintain runway heading to at least 500 feet. Then raise your flaps (if any), accelerate to cruise climb (85-95 knots) and turn on course.

Exercise 7: Select free flight and clear weather. Take off as described above without flaps. At 500 feet start the turn towards SMV (follow the blue arrow on the HSI or turn to the heading indicated under 'BRG'). Climb to 2000 feet and level off.

Exercise 8: Repeat in breezy weather. Note that you will need to turn left immediately after becoming airborne in order to maintain runway heading. If you fail to do so, the wind will blow you to the right.


Landing

Now that you can take off, climb, turn and descend, there is still one important part missing: the landing. While it can be tricky - e.g. when there is a gusty crosswind - it is not too complicated normally. It all comes down to correctly managing speed, altitude and power while being correctly aligned with the runway. As they say: a good landing starts with a good approach.

First, you must be aligned with the runway axis (which at Tinyville is 85° from the west or 265° from the east). If you move away from the axis, make small corrections to rejoin it. If you have a crosswind, you might need to point to the left or the right of the runway to remain aligned with its axis.

Then, you also want to be on the correct glidepath, i.e. coming in at the right angle. A normal approach is flown at a 3° angle. Generally speaking, it is better to come in too steep than coming in too flat (in which case you might collide with the ground). To help you judge your approach angle, there are four bi-colored lights on the left side of the runway (called PAPI lights).

- If you are seeing two white and two red lights, your approach is correct ('red over white, you're alright').
- If you are seeing three white and one red lights, you are slightly too high. Example:

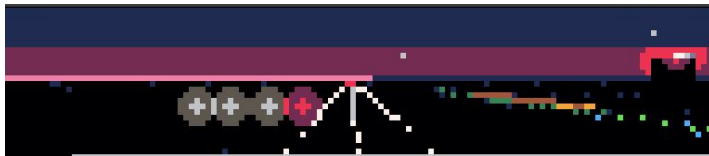

- If you are seeing four white lights, you are too high ('white over white, you are going to fly all night').
- If you are seeing one white and three red lights, you are slightly low.
- If you are seeing four red lights, you are too low ('red over red, you are dead').

A good place to start is to lower the flaps, reduce power to around 1200 RPM and put the nose slightly below the horizon. This will result in a sink rate of 400-500 feet per minute and an indicated airspeed of 65-70 knots. Make continuous, small adjustments:

- If you are getting too low, add a little bit of power.
- If you are getting too high, remove a little bit of power.
- If you are getting too slow (below 60 knots), lower the nose a tiny bit.
- If you are getting too fast (above 75 knots), raise the nose a tiny bit.

If you do everything correctly, you will eventually arrive over the beginning of the runway flying in the direction of the runway. At 50 feet off the ground, reduce power to idle. Then you start to continuously raise the nose. When the airplane is about to touch down, raise the nose some more. Keep it off the ground as long as you can. The goal is to touch down at the lowest possible speed.

Exercise 9: Select visual approach and clear weather. Land as per the description above. Too easy? Try to land in a stiff crosswind by selecting breezy weather!

Stall & Unusual Attitude Recovery

Sometimes, things just go wrong... You did not pay attention to your airspeed and now the airplane is too slow. The wings do not generate enough lift to keep the airplane flying. This is called a stall. The instinctive reaction is to pull the controls in order to keep the airplane in the air. This is wrong and will kill you if happen to be close to the ground. What you need to do is apply full power and simultaneously push the controls to lower the nose. This will increase airspeed and the airplane starts flying again.

Exercise 10: Select full approach and clear weather. Reduce power to idle and raise the nose to 15° nose up. When the airplane stalls, apply full power and lower the nose. Go back to straight and level flight. Note at which airspeed the airplane stalls and how much altitude you lose during the recovery.

Exercise 11: Repeat with flaps. Instead of reducing power to idle apply full power and see how high you have to raise the nose for the airplane to stall. Note at which airspeed the airplane stalls. It should be lower compared to Exercise 10 as we used flaps this time.

An attitude is considered as unusual when there is an unusually high pitch (nose pointing up or down) or bank (lowered wing) angle. There are two cases to distinguish: nose high and nose low. In the first case, a stall is normally imminent and it is up to you to prevent the stall (if you don't then hopefully you have trained stall recovery...). In order to do this, you simultaneously apply full power, lower the nose to the horizon and only then level the wings. In the second case, you first level the wings and reduce power to idle (to prevent overspeed) and only then start to pull up. If you start to pull up in a steep bank, you might overstress the airplane and cause structural damage (i.e.. your wings fall off).

Exercise 12: Select unusual attitude and clear weather. Immediately reduce power, level wings and pull up.

ILS Approach

This lesson is similar to the landing lesson, only this time you are in the clouds and you do not see the airport at first. You will have to fly the airplane and find the airport only with reference to your instruments.

There is a ground-based beacon called Instrument Landing System (ILS), which will guide you towards the airport and the correct angle. You already know the heading of the runway you will land on (85° at Tinyville) and your instruments will tell you how much you are to the left or to the right of the correct path. Also, you want to descend on a 3° angle. Your instruments will tell you how much above or below the glidepath you are. Then you also have to manage your airspeed in order to be neither too fast nor too slow. And always remember: a good landing starts with a good approach, so you want your approach be stable and only make minor corrections.

With regard to your horizontal path, there are three possible cases:

- You are on the correct path (called the localizer) flying runway heading. This is what you want to look at most of the time. Attention: if you fly the correct heading and you see the green needle of the localizer moving either left or right, you have a crosswind and you need to fly slightly into the wind in order to stay on the localizer.
- You are to the left of the localizer flying runway heading, which means that the green needle on the HSI is to your right and you need to fly slightly to the right to re-center the green needle. When it reaches the center of the airplane symbol, turn back to the runway heading (85° in this example).
- You are to the right of the localizer flying runway heading, which means that the green needle on the HSI is to your left and you need to fly slightly to the left to re-center the green needle. When it reaches the center of the airplane symbol, turn back to the runway heading (85° in this example).



Concerning your vertical path, there are also three cases. They are somewhat similar to the visual approach with the PAPI lights, which tell you if you are too high or too low.

- If the green dot is in the centered, it means that you are on the correct 3° glidepath and you are neither too high nor too low. If you maintain 100 knots and a 500 feet per minute descent, you should remain on the glidepath.
- If the green dot is above center, this means that you are below the glide slope. This is dangerous as you are too close to the ground. Add a bit of power and slightly raise the nose. Once the green dot is re-centered, establish a 100 knot, 500 feet per minute descent to remain on the glidepath.
- If the green dot is below center, this means that you are above the glide slope. Slightly reduce power and lower the nose. Once the green dot is re-centered, establish a 100 knot, 500 feet per minute descent to remain on the glidepath.



Exercise 13: Select final approach and clear weather. Let's take it easy first and fly an ILS approach with good visibility. Fly straight and level on a 85° heading at 100 knots. Soon you will see the green glideslope dot moving in from above. When it is almost centered lower the flaps and establish a 500 feet per minute descent while remaining at 100 knots. Observe, if the green dot remains centered and make small adjustments if necessary. Make small heading adjustments to remain on the localizer. Once you arrive at 200 feet, look outside and make a normal landing.

Exercise 14: Select final approach and breezy weather. Now you have a cloud ceiling of 1000 feet. This means that initially, you will be in the clouds but you will in the clear soon. Fly a heading of around 80° (into the wind) to remain on the localizer. At 200 feet, look outside and make a normal landing.

Exercise 15: Select final approach and stormy weather. Now you have a cloud ceiling of 200 feet. This means that you will be in the clouds all the time and break out of them only a couple of seconds before landing. Also, there is a strong crosswind from the left and you need to fly a heading of around 70° to remain on the localizer. Make small corrections to remain both on glideslope and localizer. At 200 feet, look outside and if you can see the runway, land normally.

Full Approach

This lesson will show you how to fly to a location, from which you can either fly an ILS approach (see previous lesson) or identify the airport visually and make a normal landing. There are two approaches in Tiny Sim: the full ILS approach at Tinyville and the VOR approach to Petite Ile. The ILS approach is a so-called precision approach and it will bring you down to 200 feet. The VOR approach is a so-called non-precision approach and it will bring you down to 500 feet. This means that if you have a very low cloud ceiling (as in the stormy weather scenario), you will not be able to successfully fly this approach and have to divert to Tinyville.

ILS approach into Tinyville:

Exercise 16: Select full approach and clear weather. You are inbound to PCO VOR on a 313° heading at 3000 feet. (As the weather is good, you can already see the airport slightly to the right. You will fly the same approach in the clouds later on.) You are one mile from PCO, which is directly ahead of you (blue arrow). The distance will decrease and when you pass over PCO, the arrow will turn and point behind you. Continue on this heading. When you are approx. 6 miles from PCO, you will see the green CDI moving (which means that you get closer to Tinyville's localizer - green line on the map).

(Ex. 16 continued) You will then turn left to a heading of 265° and follow the localizer away from the airport. At the same time, reduce power to 2200 RPM and descend to 2000 feet. This is also the moment to change the GPS waypoint to TNY. This way, the blue arrow always points towards the airport. Now make a right turn to heading 310° and fly for one minute. Maintain 2000 feet. Now you fly away from the localizer at a 45° angle. Fly for 1 minute, then make a left 180° turn to heading 130° . Soon, the green localizer needle will start moving. Make a left turn to your final heading of 85° with the needle centered. At the same time, the green glideslope dot will start moving in from the top. When it centers, lower the flaps, reduce power to 2000 RPM and fly the ILS approach and land as you have learned in the previous lessons.



Exercise 17: Repeat in breezy weather. You will now fly in the clouds most of the time and have a moderate wind from the northeast. Remember to correct your heading into the wind to remain on the desired ground track. The wind indicator will show you where the wind is coming from. You will break out of the clouds at 500 feet. Continue until you see the runway and land.


Exercise 18: Repeat in stormy weather. You now have a strong wind coming out of the north. You will need to significantly correct into the wind to remain on the desired track (an initial heading of 327° instead of 313° is a good starting point). The wind indicator is your friend! You eventually break out of the clouds at 200 feet, which leaves you only a couple of seconds to find the runway and land. Good luck, this is not easy!

VOR approach into PTI

Exercise 19: Select full approach and breezy weather. This time, you will fly a non-precision approach into PTI. You are inbound to PCO VOR on a 313° heading at 3000 feet. When overflying PCO, turn left to a heading of approx. 300° (the required ground track is 295° , but you have a crosswind from the right). Fly until you are two nautical miles from PCO (DIS will indicate the distance). Then make a shallow right turn to your final heading of 145° . You are now inbound to PCO again - from the other side. When you overfly the station, reduce power to 1500 RPM and start a 1000 feet per minute descent, maintaining the heading. Level off at 500 feet. When you are 4 nautical miles from PCO, you should see the runway lights of PTI. Make a visual approach and land.

Exercise 20: Repeat in stormy weather. You will have to apply a larger correction angle into the wind. In stormy weather you will be unable to see the runway at 500 feet as you are still in the clouds. Make a climbing left turn back to PCO. Level off at 3000 feet. Make an ILS approach into TNY (see also Exercise 18) - this is your only option when the weather is really bad.

Smallville Area Aeronautical Chart

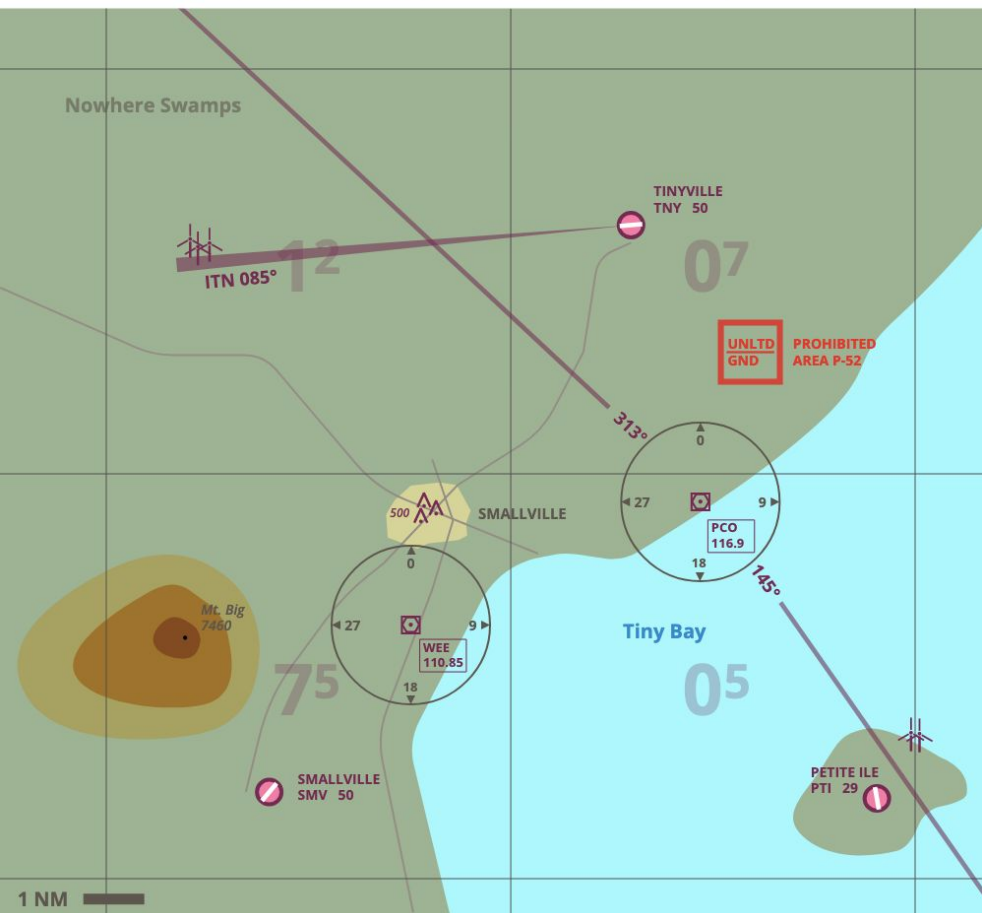

Tinyville Airport (TNY)

This is the international airport of the region. It features an ILS approach, which enables landing at TNY in really lousy weather. TNY is also home to the largest flight school in the region.

Smallville

Smallville is a beautiful city located between the ocean and Mount Big. It has a downtown area with massive skyscrapers and many parks, in which the inhabitants spend their free time. Smallville has the largest commercial port in the region. If you are lucky, you might just see some ships when flying over the ocean!

The Smallville airport (SMV) is mostly used for recreational flying. It does not have an ILS and its proximity to the city makes it unsuitable for large aircraft due to noise sensitivity of its inhabitants.

Petite Île

This is a tiny island right off the coast of Smallville. Its founders were French immigrants, which explains the name. Featuring white sandy beaches and crystal clear water, it is a favorite weekend retreat for the citizens of Smallville (at least, those who can afford it!).

Petite Ile airport (PTI) is a small island airport and you need to be careful as the runway is short and narrow!

Mount Big

Mount Big is a natural phenomenon. Scientists are unable to explain, how the 7500 feet high mountain came into existence in an otherwise perfectly flat terrain and in such proximity of the ocean (Wikipedia says that it is of volcanic origins). Tens of thousands of tourists visit the area every year to take a hike or just to sightsee and take pictures.

No-fly Zone

Nobody has confirmed information about what is going on in the no-fly zone southeast of TNY. There are rumours about secret weapon tests and a UFO crash site. Best not to speak about it and not to overfly it...