




Manual to Lab 2: PHY2048C.

Florida State University – Republic of Panama

Introduction to the Multimeter

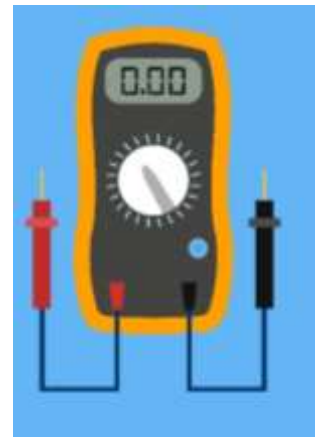

by: iyicon

About labs in this class

The labs in this class will have general instructions, and many things need to be figured out by the students. I will be answering any specific questions the students may have without completely giving away the key to the puzzle.

Answer the questions and record your measurements in your lab notebook and then submit the notebook at the end of the activity.

About this lab

In this lab, you will learn how to make measurements for resistance, current, and voltage using a multimeter¹; you will also learn how to read resistance values out of commercial resistors. The multimeter is the quintessential tool for any electrical and electronic task. You can check if there is a blackout in Panama City, or just a momentary drop in the Voltage in your neighborhood, for instance, by measuring the voltage out of an outlet in your house. This, you would do it with a multimeter.

Figure 1 shows a multimeter and the two terminals they come with: black & red.



Figure 1: Multimeter and cables

¹ The multimeter is “multi” because it includes 3 devices that historically where separate: the Galvanometer (to measure current), the Ohmmeter (to measure resistance) and the voltmeter (to measure) volatage.

The black cable is the negative terminal, or the anode (when used to measure resistance), and the red cable in the positive terminal, or cathode. The black cable must always be connected to common ground, labeled as COM (we will see exactly what this means later in the semester); this is shown in Figure 2.



Figure 2: black cable connected

The red cable goes in one of the other three terminals depending on the function of the multimeter. For it to be a voltmeter or an Ohmmeter, the cable must be inserted as shown in Figure 4. For it to be a Galvanometer, it must be inserted as shown in Figure 3.

Question 1. What do you think is the function of the third port? What does the 200 mA mean?

After you have the proper cable configuration, select the function of the multimeter with the knob.



Figure 3: configuration for Galvanometer



Figure 4: Configuration for Voltmeter and Ohmmeter

Activity 1. Measure the battery in the panel by touching the contact with the probes (negative with negative, positive to positive). Make sure you measure DC voltage. The battery says it is 9V, but this is the *nominal* (theoretical) voltage.

Question 2. What voltage does the battery read? Reverse the leads. What voltage does it read now?

Resistors' nominal resistance is given by their color bands (see Table 1).

Color	1 st Band	2 nd Band	3 rd Band	Multiplier	Tolerance
Black	0	0	0	1Ω	
Brown	1	1	1	10Ω	± 1%
Red	2	2	2	100Ω	± 2%
Orange	3	3	3	1kΩ	
Yellow	4	4	4	10kΩ	
Green	5	5	5	100kΩ	± 0.5%
Blue	6	6	6	1MΩ	± 0.25%
Violet	7	7	7	10 MΩ	± 0.1%
Grey	8	8	8		± 0.05%
White	9	9	9		
Gold				0.1Ω	± 5%
Silver				0.01Ω	± 10%

*Table 1:
resistors
color
code*

Question 3: What is the nominal value of the two resistors in the bottom-right corner of the board (see Figure 5)? Hint: gold and silver are always at the end)



*Figure 5:
Electronic Panel.
Circled are the
two resistors to
be measured.
Circled in blue is
the Solar Cell.*

Activity 2: Measure the resistance of these two resistors.

Question 3: What is the fractional discrepancy between the nominal value and the measured value?

Activity 3: Connect the battery to the leftmost resistor of the two from the previous activity. Measure the current. Do this with the other resistor.

Question 4: Ohm's law establishes that the voltage must be equal to the current times the resistance ($V = IR$). (Notice that this V is the voltage across the resistor, not the voltage of the battery). Do these resistors obey Ohm's law?

Activity 4: Measure the voltage across the solar cell. Find a way to increase this value by more than a factor of 2 without using the battery.