# INSTRUMENT DATA SHEET

| | |
|---|---|
| **VENDOR: DEVIN MACHINE** | **VENDOR'S Job: 1603** |
| **Purchase Order: PPJPC-1400-07** | **Item: INSTRUMENT DATA SHEET** |
| **Component: 80-PK-3150, 80-PK-4150, 80-PK-5150** | **Equipment:RUBBER LOADING SYSTEM** |

| Status Code | Eng. | Dept. | Date |
|---|---|---|---|
| NC | A.FARMANARA | IN | 10/4/2026 |

Comment status code:

| | | | |
|---|---|---|---|
| AP | Approved and Released for Manufacture | NC | NC - No Comments |
| CO | Not Approved | AC | AC - Approved with Comments |
| RE | RE - Rejected | | |

**IMPORTANT:** Permission to proceed does not constitute acceptance or approval of design details, calculations, analyses, test methods or materials developed or selected by the supplier and does not relieve supplier from full compliance with contractual obligation.

| Rev | Date | Class | Status | DEVIN MACHINE | | | PJPC | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | | Prepared | Checked | Approved | Prepared | Checked | Approved |
| 03 | Sep.21.2026 | IFR | | AN | MTB | MTB | | | |
| 02 | Sep.06.2026 | IFR | | AN | MTB | MTB | | | |
| 01 | Aug.29.2026 | IFR | | AN | MTB | MTB | | | |
| 00 | Dec.27.2026 | IFR | | F.CH. | F.CH. | MTB | | | |

## REVISION INDEX

| PAGE | REVISION | | | | | | | PAGE | REVISION | | | | | | | PAGE | REVISION | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | | 0 | 1 | 2 | 3 | 4 | 5 | 6 |
| 1 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 2 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 3 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 4 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 5 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 6 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 7 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 8 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 9 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 10 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 11 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 12 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 13 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 14 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 15 | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| 16 | | X | X | X | | | | | | | | | | | | | | | | | | | |
| 17 | | | X | X | | | | | | | | | | | | | | | | | | | |
| 18 | | | X | X | | | | | | | | | | | | | | | | | | | |
| 19 | | | X | X | | | | | | | | | | | | | | | | | | | |
| 20 | | | X | X | | | | | | | | | | | | | | | | | | | |
| 21 | | | X | X | | | | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | Appendix | | | | | | | |
| 26 | | | | | | | | | | | | | | | | Att. 1 | | | | | | | |
| 27 | | | | | | | | | | | | | | | | Att. 2 | | | | | | | |
| 28 | | | | | | | | | | | | | | | | Att. 3 | | | | | | | |
| 29 | | | | | | | | | | | | | | | | Att. 4 | | | | | | | |
| 30 | | | | | | | | | | | | | | | | Att. 5 | | | | | | | |

| No. | Description | Package No. | Equipment Tag No. | Instrument Tag No. | P&ID No. | Page |
|---|---|---|---|---|---|---|
| **1** | **Safety Limit Switch on Vertical Movable Platform** | | | | | |
| 1.1 | Safety Limit Switch on Vertical Movable Platform | 80-PK-3150 | 80-H-3150 | MZ31501/02/03/04 | 1603-GD-PID-001-01 | |
| 1.2 | Safety Limit Switch on Vertical Movable Platform | 80-PK-4150 | 80-H-4150 | MZ41501/02/03/04 | 1603-GD-PID-001-01 | |
| 1.3 | Safety Limit Switch on Vertical Movable Platform | 80-PK-5150 | 80-H-5150 | MZ51501/02/03/04 | 1603-GD-PID-001-01 | |
| **2** | **Low Level Switch for Oil in Hydraulic Motorized Drive** | | | | | |
| 2.1 | Low Level Switch for Oil in Hydraulic Motorized Drive | 80-PK-3150 | 80-Z-3150 | LSL31221 | 1603-GD-PID-001-01 | |
| 2.2 | Low Level Switch for Oil in Hydraulic Motorized Drive | 80-PK-4150 | 80-Z-4150 | LSL41221 | 1603-GD-PID-001-01 | |
| 2.3 | Low Level Switch for Oil in Hydraulic Motorized Drive | 80-PK-5150 | 80-Z-5150 | LSL51221 | 1603-GD-PID-001-01 | |
| **3** | **Pressure Gauge** | | | | | |
| 3.1 | Pressure Gauge | 80-PK-3150 | 80-Z-3150 | PG31220 | 1603-GD-PID-001-01 | |
| 3.2 | Pressure Gauge | 80-PK-4150 | 80-Z-4150 | PG41220 | 1603-GD-PID-001-01 | |
| 3.3 | Pressure Gauge | 80-PK-5150 | 80-Z-5150 | PG51220 | 1603-GD-PID-001-01 | |
| **4** | **Level Gauge** | | | | | |
| 4.1 | Level Gauge | 80-PK-3150 | 80-Z-3150 | LG31220 | 1603-GD-PID-001-01 | |
| 4.2 | Level Gauge | 80-PK-4150 | 80-Z-4150 | LG41220 | 1603-GD-PID-001-01 | |
| 4.3 | Level Gauge | 80-PK-5150 | 80-Z-5150 | LG51220 | 1603-GD-PID-001-01 | |

# Safety Limit Switch

# Product data sheet

Specifications



## Limit switch, Limit switches XC Standard, XCKT, thermoplastic roller lever, 1NC+1 NO, snap, M16

XCKT2118P16

## Main

| | |
|---|---|
| **Range of product** | Telemecanique Limit switches XC Standard |
| **Series name** | Standard format |
| **Product or component type** | Limit switch |
| **Device short name** | XCKT |
| **Sensor design** | Compact form A conforming to CENELEC EN 50047 |
| **Body type** | Fixed |
| **Head type** | Rotary head |
| **Material** | Plastic |
| **Body material** | Plastic |
| **Head material** | Zamak |
| **Fixing mode** | By the body |
| **Movement of operating head** | Rotary |
| **Type of operator** | Spring return roller lever thermoplastic |
| **Type of approach** | Lateral approach, 2 directions |
| **Number of poles** | 2 |
| **Contacts type and composition** | 1 NC + 1 NO |
| **Contact operation** | Snap action |

## Complementary

| | |
|---|---|
| **Tracks** | 24/40 mm |
| **Switch actuation** | By 30° cam |
| **Electrical connection** | Screw-clamp terminals, clamping capacity: 1 x 0.34...2 x 1.5 mm² |
| **Cable entry** | 2 entries tapped for M16 x 1.5 cable gland, cable outer diameter: 4…8 mm |
| **Contacts insulation form** | Zb |
| **Positive opening** | With |
| **Positive opening minimum torque** | 0.25 N.m |
| **Minimum torque for tripping** | 0.1 N.m |
| **Maximum actuation speed** | 1.5 m/s |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **Repeat accuracy** | 0.1 mm on the tripping points with 1 million operating cycles |
| **Contact code designation** | A300, AC-15 (Ue = 240 V), Ie = 3 A, Ithe = 10 A conforming to EN/IEC 60947-5-1 appendix A<br>Q300, DC-13 (Ue = 250 V), Ie = 0.27 A conforming to EN/IEC 60947-5-1 appendix A |
| **[Ui] rated insulation voltage** | 300 V conforming to UL 508<br>500 V (pollution degree 3) conforming to IEC 60947-1<br>300 V conforming to CSA C22.2 No 14 |
| **Maximum resistance across terminals** | 25 MOhm conforming to IEC 60255-7 category 3 |
| **[Uimp] rated impulse withstand voltage** | 6 kV conforming to IEC 60664<br>6 kV conforming to IEC 60947-1 |
| **Short-circuit protection** | 10 A cartridge fuse, type gG |
| **Electrical durability** | 5000000 cycles, DC-13, 120 V, 4 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>5000000 cycles, DC-13, 24 V, 10 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C<br>5000000 cycles, DC-13, 48 V, 7 W, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 appendix C |
| **Mechanical durability** | 10000000 cycles |
| **Width** | 58 mm |
| **Height** | 51 mm |
| **Depth** | 30 mm |
| **Net weight** | 0.145 kg |
| **Terminals description ISO n°1** | (21-22)NC<br>(13-14)NO |

## Environment

| | |
|---|---|
| **Shock resistance** | 50 gn for 11 ms conforming to IEC 60068-2-27 |
| **Vibration resistance** | 25 gn (f= 10…500 Hz) conforming to IEC 60068-2-6 |
| **IP degree of protection** | IP66 conforming to IEC 60529<br>IP67 conforming to IEC 60529 |
| **IK degree of protection** | IK04 conforming to EN 50102 |
| **Electrical shock protection class** | Class II conforming to IEC 61140<br>Class II conforming to NF C 20-030 |
| **Ambient air temperature for operation** | -25…70 °C |
| **Ambient air temperature for storage** | -40…70 °C |
| **Protective treatment** | TC |
| **Product certifications** | UL<br>CSA<br>CCC |
| **Standards** | UL 508<br>EN/IEC 60204-1<br>CSA C22.2 No 14<br>EN/IEC 60947-5-1 |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Number of Units in Package 1** | 1 |
| **Package 1 Height** | 5.8 cm |
| **Package 1 Width** | 6.8 cm |
| **Package 1 Length** | 12.0 cm |
| **Package 1 Weight** | 149.0 g |
| **Unit Type of Package 2** | S02 |

| | |
|---|---|
| **Number of Units in Package 2** | 24 |
| **Package 2 Height** | 15.0 cm |
| **Package 2 Width** | 30.0 cm |
| **Package 2 Length** | 40.0 cm |
| **Package 2 Weight** | 4.083 kg |


## Offer Sustainability

| | |
|---|---|
| **Sustainable offer status** | Green Premium product |
| **REACh Regulation** | REACh Declaration |
| **EU RoHS Directive** | Pro-active compliance (Product out of EU RoHS legal scope)<br>EU RoHS Declaration |
| **Mercury free** | Yes |
| **RoHS exemption information** | Yes |
| **Environmental Disclosure** | Product Environmental Profile |
| **Circularity Profile** | End of Life Information |
| **California proposition 65** | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |

## Contractual warranty

| | |
|---|---|
| **Warranty** | 18 months |


## Dimensions

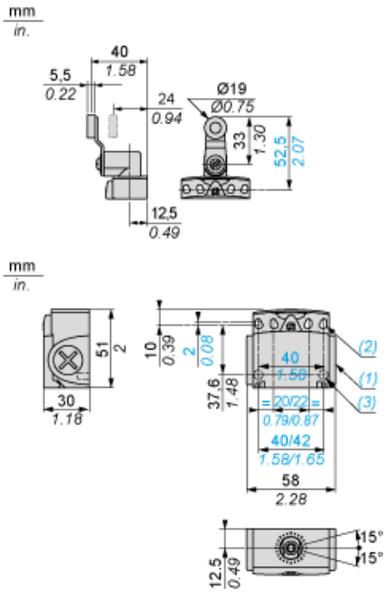


**(1)** Tapped entry for M16 x 1.5
**(2)** 4 elongated holes Ø 4.3 x 6.3 mm on 22/42mm ctrs, 4 holes Ø 4.3 on 20/40 mm ctrs.
**(3)** 2 x Ø 3 holes for support studs, depth 4 mm.

## Mounting with Cable Entry


### Position of Cable Gland

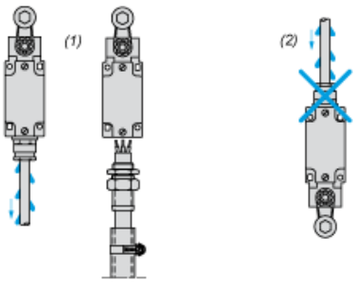


**(1)** Recommended
**(2)** To be avoided


## Mounting with Rotary Heads and Levers

### Type of Cam

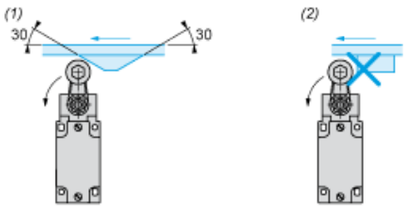


**(1)** Recommended
**(2)** To be avoided

## Setting-up with Head ZCE01 and ZCE09




**(1)** Tightening torque (Min : 1) (Max : 1.5)
**(2)** Tightening torque (Min : 0.8) (Max : 1.2)


## Wiring Diagram

### 2-pole NC + NO Snap Action




## Characteristics of Actuation

### Switch Actuation by 30° Cam



## Functionnal Diagram

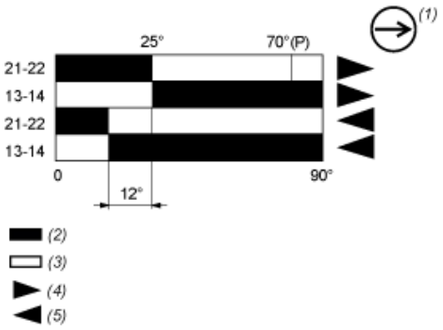


**(P)** Positive opening point
**(1)** NC contact with positive opening operation
**(2)** Closed
**(3)** Open
**(4)** Tripping
**(5)** Resetting

## Recommended replacement(s)

# Level Switch



# LS Type 06

## لول سوئیچ مایعات

## Liquid Level Switch

### 1- Working Range:

Level switch type LS-06 is useful device to control level of liquids. Its working attributes are: PN16/40 Nominal pressure, screwed and flanged connection, 150 °C or 302° F working temperature. this device is used in water, fuel, acid, De aerator tanks and also condensate, under pressure caldrons, water treatment systems and etc.

### 2- Function:

Function of this device is based on electro-magnetic. with change of liquid level, the floater ball move up and down (vertically) on the device rod. This movement stimulates the sensor which is improvised in slightly height, By this way ON-OFF commands are sent to the electrical circuits for controlling electrical equipment such as Electro-pumps, solenoid valve by panel or without it . All parts inside liquid are made of stainless steel and have durable life. This instrument is thoroughly sealed against penetration of water and has possibility to install more sensors on its rod for using alarms. It is mounted from side or above of reservoirs and can be equipped with more than one floater to get more safety factor and changes activity of switches.

### 3- Installation:

In cases the tanks are mounted underground or in specific required conditions. the device is installed on topside of tanks by the flange connection. To avoid rod damage from turbulence liquid, a guide can be installed on the bottom of reservoir(In cases which reservoir height is more than 1500mm). A chamber can be mounted on take then LS-06 is set on this chamber when it is installed from side of reservoir

### 1– دامنه عملکرد :


لول سوئیچ تیپ LS-06 جهت کنترل کردن سطح مایعات مورد استفاده قرار می گیرد. این دستگاه در فشار نامی PN16/40 و اتصال دنده ای و فلنجی و دمای کاری 150°C یا 302° F تولید می شود.از این تجهیز در مخازن آب ، دی اریتور ،تانکهای سوخت ،مخازن کندانس ،منابع تحت فشار ،تانکهای اسید ، تصفیه خانه های آب و ... استفاده می شود.


### 2– طرز کار:

اساس کار این دستگاه الکترومغناطیسی می باشد. توپی که بر روی میله دستگاه قرار گرفته با تغییر سطح مایع در جهت بالا و پائین به صورت عمودی به حرکت در می آید. حرکت توپی موجب تحریک سنسورهای تعبیه شده در ارتفاع مورد نظر شده و بدین طریق می توان فرمانهای ON-OFF را به وسیله پانل و یا بدون پانل به مدارهای الکتریکی ارسال و تجهیزات الکتریکی مختلفی از جمله الکتروپمپها ، سلونوئیدولوها و غیره را کنترل نمود. کلیه قطعات داخل مایع از جنس استنلس استیل بوده و دارای عمر طولانی می باشد. دستگاه در مقابل نفوذ آب، دارای آببندی کامل می باشد. این تجهیز را در بالای مخازن و یا در جوانب می توان قرار داد . امکان تعبیه سنسورهای بیشتری جهت استفاده در علائم هشدار دهنده ها را دارد . امکان تعبیه چند توپی جهت ضریب اطمینان بیشتر و یا تغییر نحوه عملکرد سوئیچها را دارد.

### 3– نصب:

در مواردی که مخازن در زیر زمین به صورت دفنی می باشد و یا در شرایط خاص این تجهیز از بالای مخازن به صورت فلنجی یا دنده ای نصب می شود . در مواردی که مخازن دارای ارتفاع بیش از 1500mm باشد به منظور جلوگیری از آسیب دیدن میله در برابر نوسانات مایع و فشارهای احتمالی وارد بر آن یک مهار کننده را می توان در کف مخزن قرار داد . در مخازنی که نصب LS-06 از جوانب مخازن مورد نیاز باشد می توان این دستگاه را در داخل یک چمبر قرارداد و چمبر را به وسیله دو نازل از کناربه مخزن مورد نظر متصل نمود.

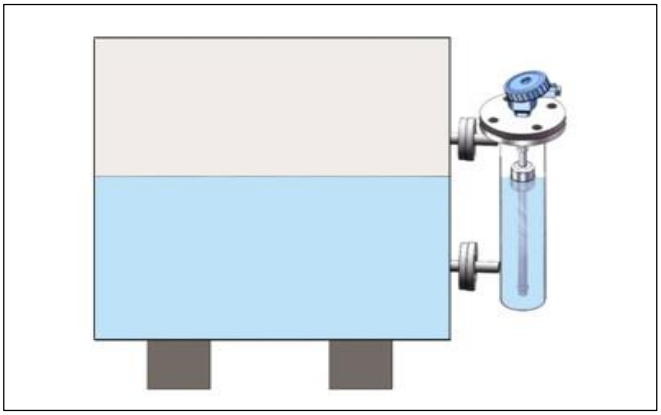

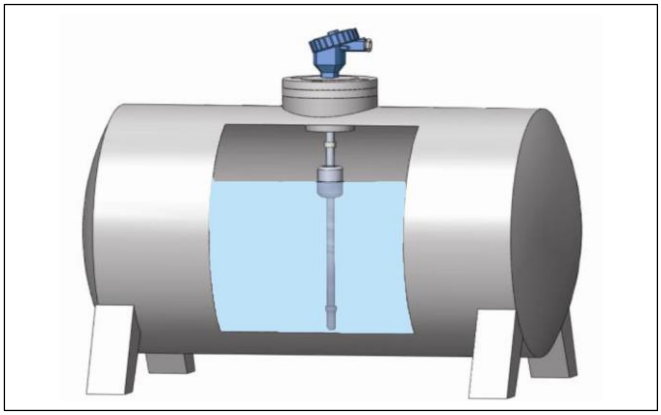

## 4-Technical and Material Data:


## 4– مشخصات فنی و متریال :


| | | |
|---|---|---|
| PN16 / 40 | Nominal Pressure | فشار نامی |
| -10 …+150 ˚C | Working Temperature | دمای کاری |
| 350 mm | Makeable Length | طول |
| IP65 | Ingress Protection | محافظت در برابرغبار و رطوبت |
| 0.8 gr/cm3 | Min. Density | کمترین دانسیته |
| 400 cSt | Max Viscosity | بیشترین گرانروی |
| 3A 220VAC | Output power & current output of CP22 panel | جریان و ولتاژ خروجی از پانل CP22 |
| 220V AC | Power supply of CP22 panel | ولتاژ تغذیه پانلCP22 |
| AL | Box Material (Ex d client order) | متریال باکس (در صورت سفارشEx d) |
| SS316 | Ball Material | متریال توپی |
| SS316 | Flange & other parts inside liquid | متریال فلنج و بقیه لوازم در ارتباط با سیال |
| Screwed NPT 2" | Size & Type of connection | نوع و سایز اتصال |


## 5-Parts Table, Assembling and Dimension Plans:

## 5– جدول قطعات و نقشه های مونتاژی و ابعادی :

| No | Part Name | نام قطعه | No | Part Name | نام قطعه |
|---|---|---|---|---|---|
| 1 | باکس | Box | 4b | اتصال فلنجی | Flange connection |
| 2 | اورینگ زیر باکس | O-Ring | 5 | بدنه | Body |
| 3 | نگهدارنده باکس | Box Holder | 6 | توپی | Ball |
| 4a | اتصال دنده ای | Screwed connection | 7 | نگهدارنده توپی | Ball Holder |

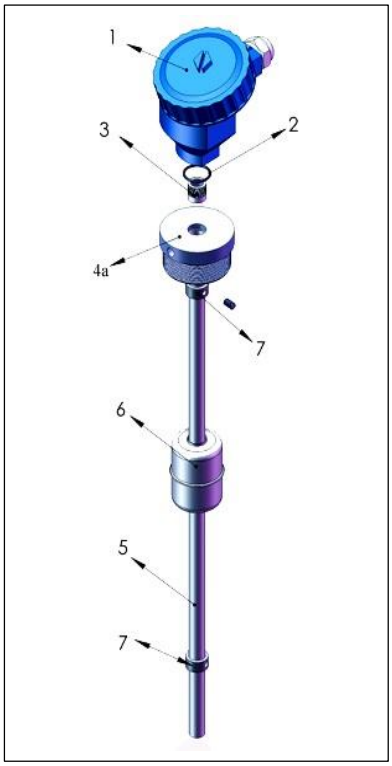
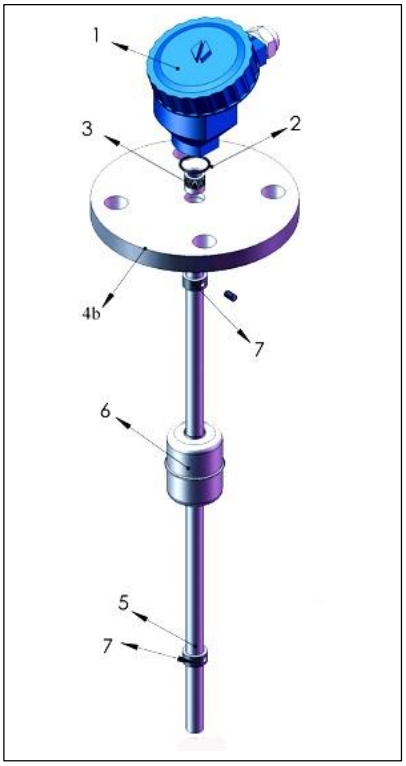
# Pressure Gauge

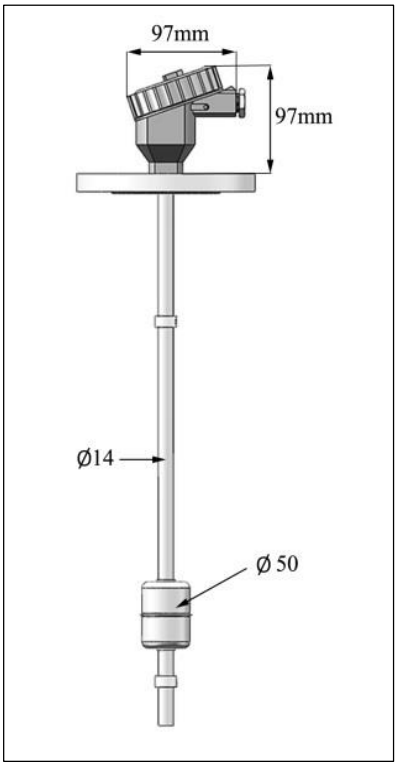INDUMART Canada
www.indumart.com

# Fillable All Stainless Steel Pressure Gauges

## SERIES: P22

**Dial:** 1½", 2", 2½", 4", 6", 8", 10"
**Accuracy:** 0.5%, 1.0%, 1.6%, 2.5%



## DESCRIPTION

Indumart *P22 Series* Fillable Stainless Steel Pressure Gauges are ideal for harsh environment and corrosive media. Because of their robust design, these heavy duty gauges meet stringent demands and bring the advantages of high accuracy, long-term stability and protection against water jets and dust on the moving parts.

These heavy duty pressure gauges are used at measuring points with high dynamic alternating loads and strong vibrations and pulses. They may be filled with glycerin or silicon oil to ensure smooth pointer movement and to provide lubrication of the moving parts protecting the measuring system against wear.

Optionally, the *P22 Series* may be ordered with monel wetted parts (4" & 6" dials) and/or various types of wall and panel mounting configurations, such as front or back flange and U-bracket.

P22T2FG
1.6%
316SS
250 BAR

## SPECIFICATIONS

| | |
|---|---|
| **Connection** | Back or bottom |
| **Case** | Stainless steel |
| **Element** | 316 st. steel bourdon tube |
| **Protection** | IP65 |
| **Range** (not available for all dials) | 0...10 to 0...20000 psi;<br>0...60 to 0...160000 kPa;<br>0...0.6 to 0...1600 bar<br>Vacuum & compound ranges*<br>Receiver gauges with linear or Sq. root scales are available. |

* Maximum range for 2" and 2½" dial is 15000 psi (1000 bar, 100000 kPa).
* Maximum range for 1½" dial is 9000 psi (600 bar, 60000 kPa).

## ORDER CODES

**Model P22** ☐ ☐ — ☐

CONNECTION
Back — K
Bottom — T

DIAL SIZE
40 mm (1½") — 0
50 mm (2") — 1
63 mm (2½") — 2
100 mm (4") — 4
160 mm (6") — 6
200 mm (8") — 8
250 mm (10") — 9

OPTIONS (more than one option may be selected)
Glycerine Filling — FG
Silicon Filling — FS
0.5% Accuracy (4", 6", 8" & 10" dials only) — AC
316 St. steel Case & Bezel — CT
Safety Glass (4", 6", 8" & 10" dials only) — WS
Monel K400 Wetted Parts (4" & 6" only) — IM
¼" Process Connection (4", 6", 8" and 10" dial only) — TR
BSP Thread — TB
Back Flange for wall mounting (not 1½ & 2" dials) — MK
Front Flange for panel mounting (not 1½ & 2" dials) — MF
U-bracket for panel mounting — MU

*Example: P22T4-FG,IM,TR,MF*

| Size | 1½" (40 mm) | 2" (50 mm) | 2½" (63 mm) | 4" (100 mm) | 6" (160 mm) | 8" (200 mm) | 10" (250 mm) |
|---|---|---|---|---|---|---|---|
| Accuracy* | 2.5% | | 1.6% | 1.0% (0.5% option) | | 1.0% (0.5% option) | |
| Window | Glass (Plxiglas for filled version) | | Plexiglas | Glass (safety glass as option) | | | |
| Bezel | Push fit | | | Bayonet | | | |
| Pointer | Fixed | | | Micrometer Adjustment | | Slotted "O" Adjustment | |
| Thread | ⅛" NPT (BSP option) | ¼" NPT (BSP Thread as option) | | ½" NPT (¼" NPT and/or BSP Thread as option) | | | |
| Fluid Temp.* | 180ºC max. | | 270ºC max. | 300ºC max. | | 270ºC max. | |

* Varies for the filled gauges. Please enquire.


Specifications may change without prior notice.

# Level Gauge


## LEVEL GAUGE FACE TYPE

- 'O' RING TYPE CONSTRUCTION
- 5 SIZE 3", 4",5",6" & 10" BETWEEN BOLT CENTERS
- FOR NON PRESSURISED TANKS ONLY
- CAN BE MOUNTED ON TAPPED HOLES
- SUITABLE FOR MINERAL / PETROLEUM BASED OILS FOR POLY CARBONATE
- MAXIMUM TEMPERATURE 80° C
- TRANSPERENT POLYMIDE MATERIAL IS AVILIBLE FOR USE WITH MINERAL/PETROLEUM & WATER BASED FLUIDS. ANY CONTACT WITH ALCOHAL OR SOLVENTS MUST BE AVOIDED .



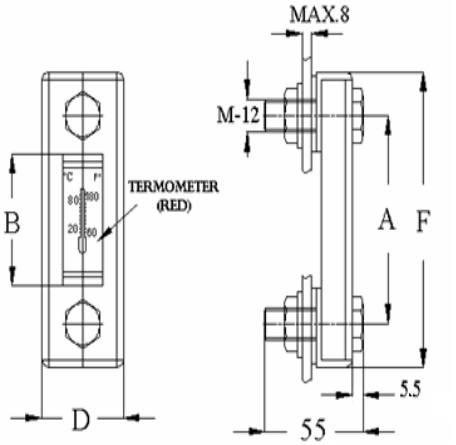


OLI-03/05

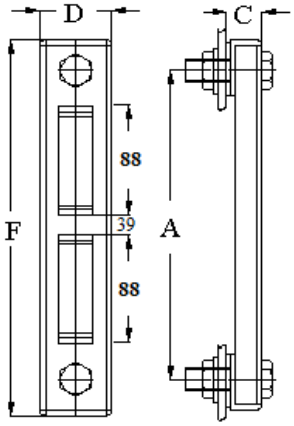


OLI-10


| MODEL | A | B | C | D | F | WT KGS |
|---|---|---|---|---|---|---|
| OLI - 03 | 76.2 | 37 | 21 | 37 | 109 | 0.16 |
| OLI - 05 | 127.5 | 88 | 21 | 37 | 161. | 0.18 |
| OLI - 10 | 254.0 | 215 | 21 | 37 | 286.5 | 0.28 |
| OLI - 04 | 101.6 | 63 | 21 | 36 | 135.0 | |
| OLI - 06 | 152.4 | 115 | 21 | 36 | 186.0 | |

* Tolerance: ± 1 MM

| OLI SERIES | 5 SIZE INCH | T FEATURE OPTIONAL # | M 10 FEATURE SPECIAL # |
|---|---|---|---|
| | | | |
| | 03 - 3" | | M 12 - STD |
| | | | (M12 X 1.75 BOLT) |
| | 04 - 4" | | |
| | | | M 10 - SPECIAL |
| OLI | 05 - 5" | T - THERMOMETER | (M12 X 1.50 |
| | | BOLT) ( OMIT IF NOT REQD) | |
| | 06 - 6" | | |
| | | | |
| | 10 - 10" | | |

# OPTIONAL / SPECIAL FEATURE – OMIT IF NOT REQUIRED

**DIMENSIONS IN MM FOR REFERENCE ONLY**

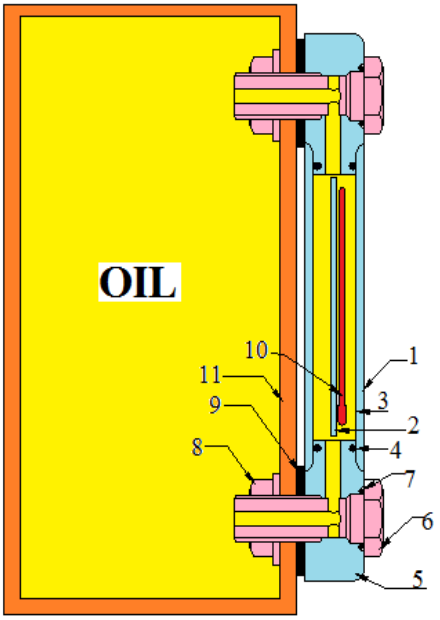


**OIL RESERVOIR**

1. COVER (FRAME)
2. OIL MARKING PLATE
3. TUBE
4. O-RING 14X2.5
5. END CONNECTOR
6. BOLT M12 & (M10 OPTIONAL)
7. O-RING 12X3
8. FLANGED & SARRETED NUT
9. WASHER 12X27X3
10. THERMOMETER (OPTIONAL)
11. OIL TANK